NDB TII 269	APP CRS 250°	Rwy Idg 4000 TDZE 785 Apt Elev 786

NDB RWY 24

SENECA COUNTY (16G)

Rwy 24 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Findlay altimeter setting and increase all MDAs 60 feet, increase S-24 Cat C visibility ⅛ SM, and Circling Cat D visibility ¼ SM. Straight-in Rwy 24 NA at night, Circling Rwy 24 NA at night.

NA

MISSED APPROACH: Climb to 2400 then right turn direct TII NDB and hold.

AWOS-3	FDY ASOS	TOLEDO APP CON	UNICOM
127.175	132.85	120.8 317.55	123.0 (CTAF) L

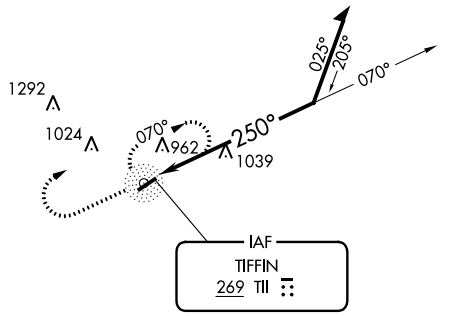



1667

ELEV 786 TDZE 785





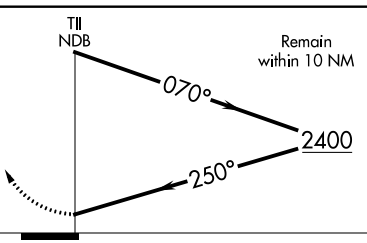

CATEGORY	A	B	C	D
S-24	1460-1	675 (700-1)	1460-1⅞ 675 (700-1⅞)	1460-2 675 (700-2)
CIRCLING	1460-1	674 (700-1)	1460-2 674 (700-2)	1560-2½ 774 (800-2½)

MIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 24

SENECA COUNTY(16G)

WAAS	APP CRS	Rwy Idg	4000
CH 90528	242°	TDZE	785
W24A		Apt Elev	786

RNP APCH.

Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. Rwy 24 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, and increase LPV, LNAV/VNAV all Cats visibility ⅛ SM, increase LNAV and Circling Cat C visibility ¼ mile.

NA

MISSED APPROACH: Climb to 2400 direct MAZKY and hold.

AWOS-3	FDY ASOS	TOLEDO APP CON	UNICOM
127.175	132.85	120.8 317.55	123.0 (CTAF) L

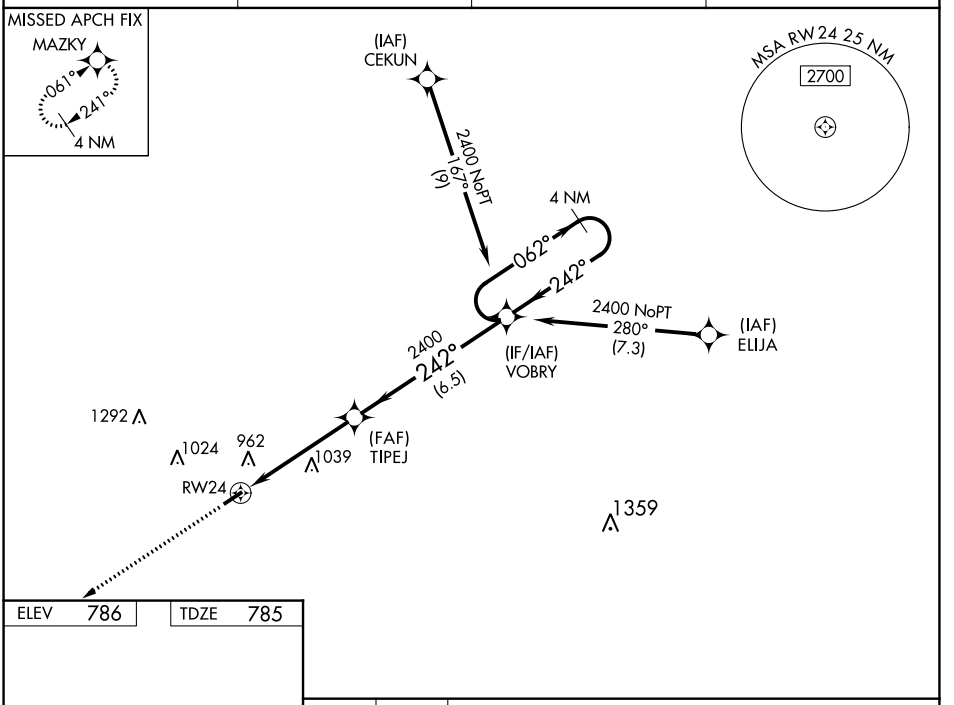

ELEV 786 TDZE 785



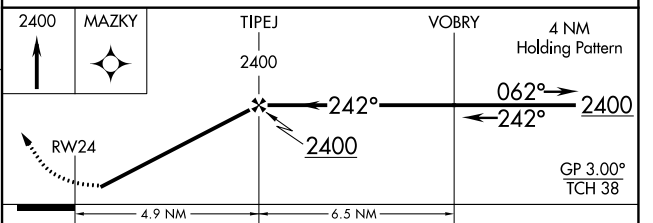

CATEGORY	A	B	C	D
LPV DA	1058-1	273 (300-1)		NA
LNAV/VNAV DA	1063-1	278 (300-1)		NA
LNAV MDA	1280-1	495 (500-1)	1280-1⅜ 495 (500-1⅜)	NA
CIRCLING	1280-1	494 (500-1)	1340-1½ 554 (600-1½)	NA

MIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 6

SENECA COUNTY (16G)

WAAS	APP CRS	Rwy Idg	4000
CH 77713	061°	TDZE	786
W06A		Apt Elev	786

RNP APCH.

Circling to Rwy 24 NA at night. Baro-VNAV NA when using Findlay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Findlay altimeter setting and increase all DA/MDA 60 feet, increase LPV all Cats ¼ SM and LNAV and Circling Cat C visibility ¼ SM.

NA

MISSED APPROACH: Climb to 2400 direct VOBRY and hold.

AWOS-3	FDY ASOS	TOLEDO APP CON	UNICOM
127.175	132.85	120.8 317.55	123.0 (CTAF) L

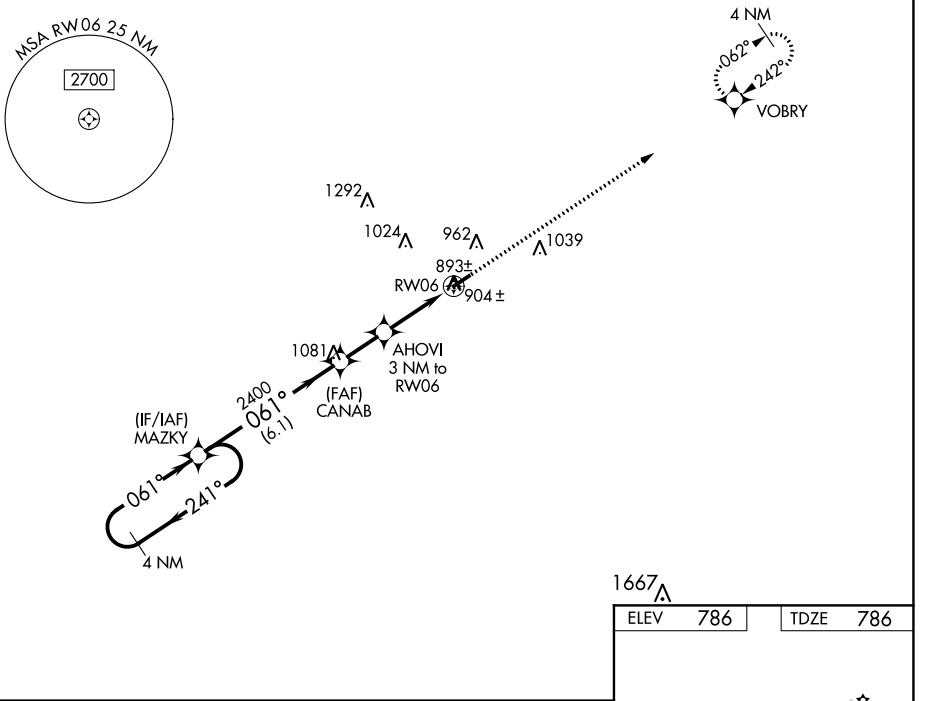

CATEGORY	A	B	C	D
LPV DA	1137-1¼ 351 (400-1¼)			NA
LNAV/VNAV DA	1174-1½ 388 (400-1½)			NA
LNAV MDA	1160-1 374 (400-1)			NA
CIRCLING	1280-1 494 (500-1)		1340-1½ 554 (600-1½)	NA

MIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

VOR RWY 6

SENECA COUNTY (16G)

VORTAC FBC	APP CRS	Rwy Idg	4000
108.2	073°	TDZE	786
Chan 19		Apt Elev	786

DME required.

T NA Circling to Rwy 24 NA at night. Rwy 6 helicopter reduction below ¾ SM NA. When local altimeter not received, use Findlay altimeter setting and increase all MDA 60 feet and S-6 Cat C visibility ⅛ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 2400 then left turn on FBC VORTAC R-073 to REBUT/FBC 21 DME and hold.

AWOS-3	FDY ASOS	TOLEDO APP CON	UNICOM
127.175	132.85	120.8 317.55	123.0 (CTAF) L

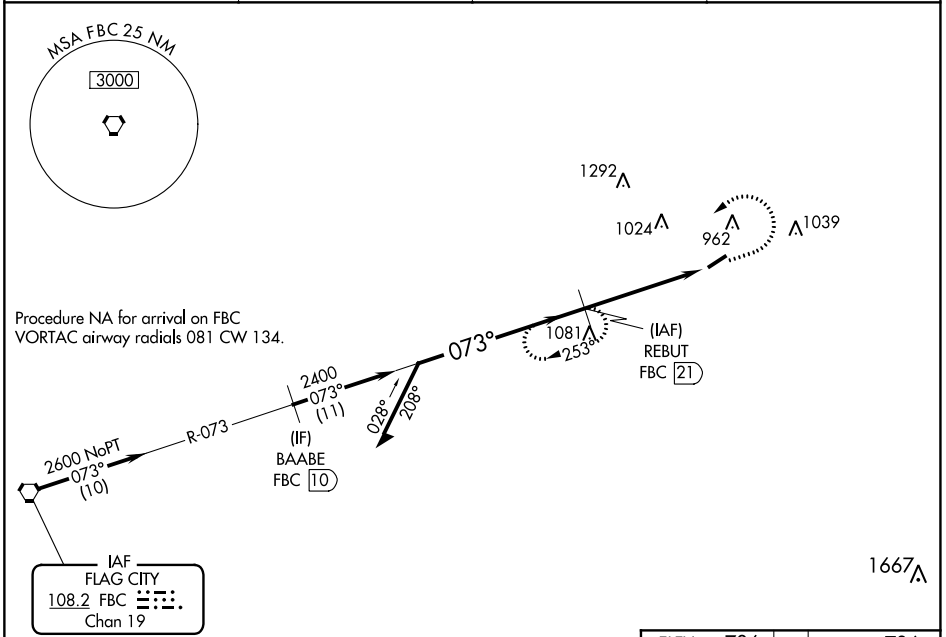

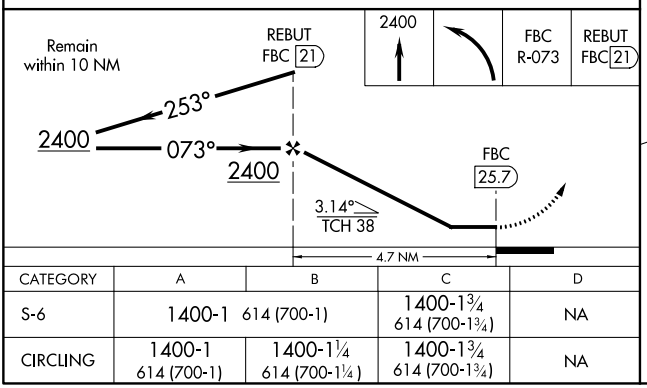

2400		FBC R-073	REBUT FBC 21

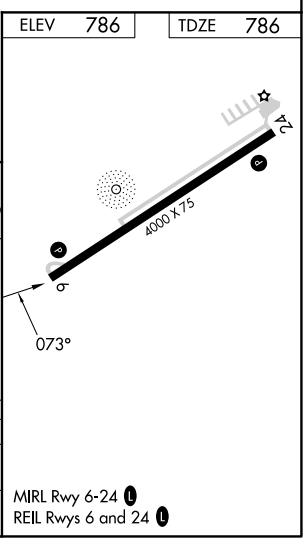

CATEGORY	A	B	C	D
S-6	1400-1 614 (700-1)		1400-1¾ 614 (700-1¾)	NA
CIRCLING	1400-1 614 (700-1)	1400-1¼ 614 (700-1¼)	1400-1¾ 614 (700-1¾)	NA

MIRL Rwy 6-24 L
REIL Rwys 6 and 24 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024