

WAAS CH 93924 W36A	APP CRS 005°	Rwy Idg 3499 TDZE 246 Apt Elev 247
--	------------------------	---

RNAV (GPS) RWY 36
CHARLES W BAKER (2M8)


▼

▲ NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Millington/Memphis altimeter setting and increase LPV DA to 610 feet; increase LNAV/VNAV DA to 713 feet; increase all MDAs 40 feet and LNAV Cat C visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Rwy 36 helicopter visibility reduction below 3/4 SM NA. Baro-VNAV and VDP NA when using Millington/Memphis altimeter setting. Circling Rwy 18 NA at night.

MISSED APPROACH:
Climb to 3000 direct
OZSOM and hold,
continue climb-in-hold
to 3000.

AWOS-3PT 119.575	MEMPHIS APP CON 125.8 338.3	UNICOM 122.8 (CTAF)
----------------------------	---------------------------------------	-------------------------------

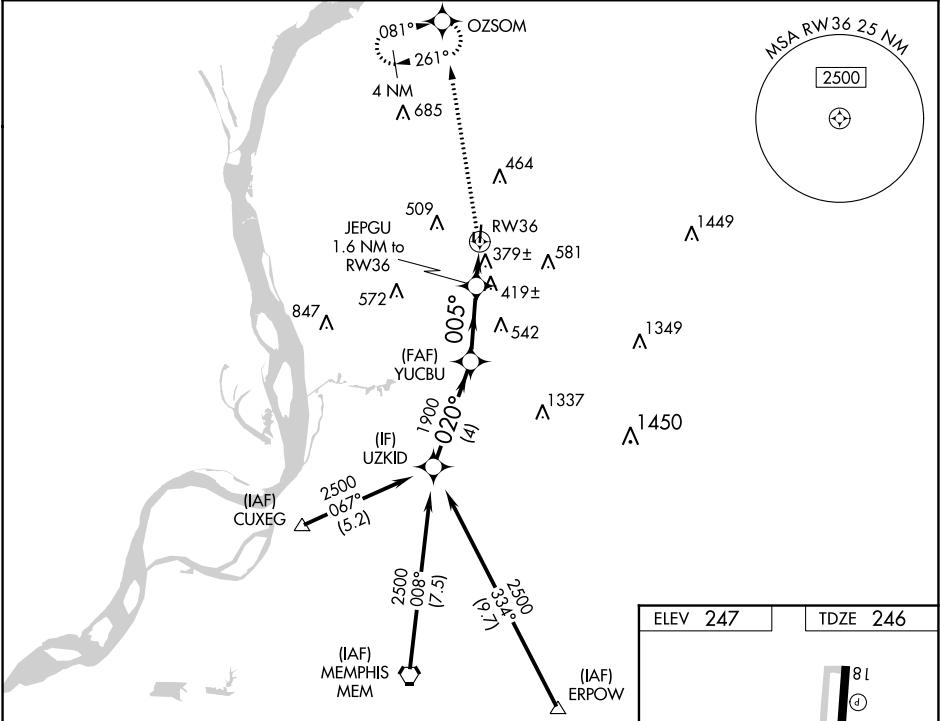

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 40).				
GP 3.50° TCH 53				
4 NM 2.7 NM 0.7 NM 0.9 NM				
CATEGORY	A	B	C	D
LPV DA	586-1	340 (400-1)		NA
LNAV/VNAV DA	689-1 3/8	443 (500-1 3/8)		NA
LNAV MDA	680-1	434 (500-1)	680-1 1/4 434 (500-1 1/4)	NA
CIRCLING	760-1 513 (600-1)	860-1 613 (700-1)	900-1 3/4 653 (700-1 3/4)	NA

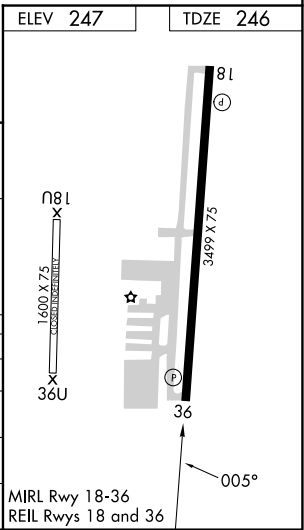

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024