

WAAS CH 77619 W18A	APP CRS 183°	Rwy Idg TDZE 3326 Apt Elev 3326
--	------------------------	---

RNAV (GPS) RWY 18

SYRACUSE-HAMILTON COUNTY MUNI (3K3)

RNP APCH-GPS.


▼

▲


Baro-VNAV NA when using Lamar altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). When local altimeter setting not received, use Lamar altimeter setting; increase LPV DA to 3730 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 4093 feet and all visibilities ¾ SM; increase all MDAs 160 feet and visibility Circling Cat A/B ¼ SM and LNAV Cat C and Circling Cat C ½ SM. VDP NA when using Lamar altimeter setting. Circling to Rwy 13/31 NA at night.

MISSED APPROACH:
Climb to 5700 direct YEKUP and hold.

AWOS-3 119.975	DENVER CENTER 133.4 377.175	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

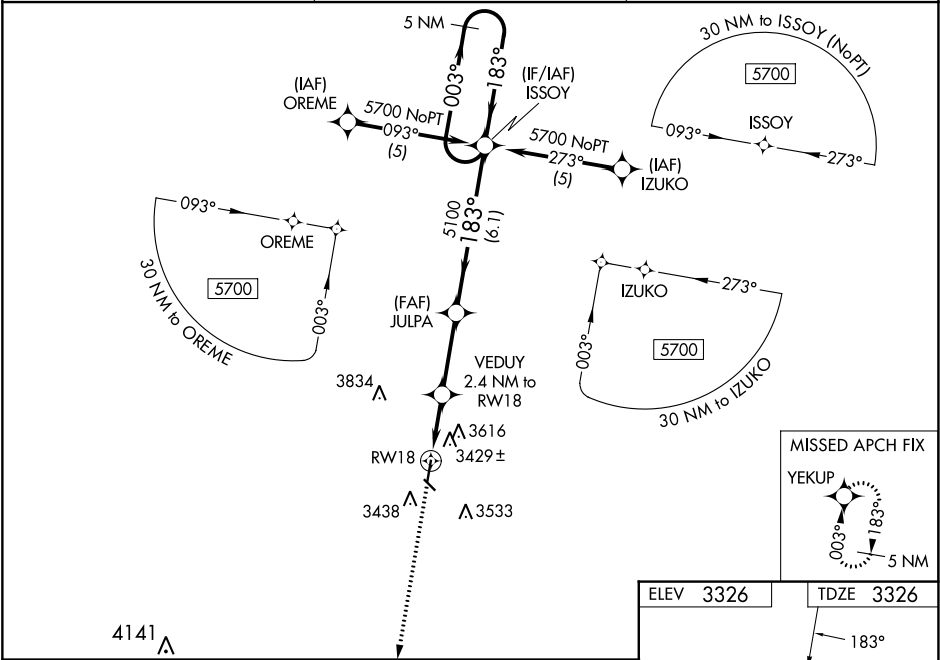

5700	YEKUP	VEDUY 2.4 NM to RW18	JULPA 5100	ISSOY 5 NM Holding Pattern	5700
*LNAV only		*1.6 NM to RW18			
RW18		4120*	5100		GP 3.00° TCH 35
1.6 NM	0.8 NM	3 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA	3576-1	250 (300-1)		NA	
LNAV/VNAV DA	3939-2¼	613 (700-2¼)		NA	
LNAV MDA	3860-1	534 (600-1)	3860-1½ 534 (600-1½)	NA	
CIRCLING	3980-1	654 (700-1)	4200-2½ 874 (900-2½)	NA	

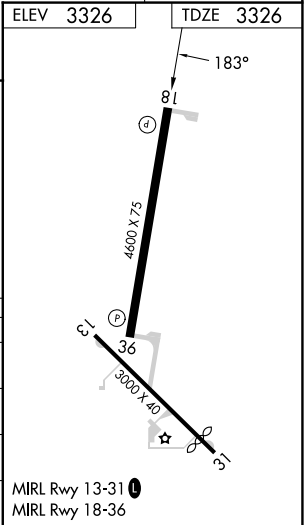

WAAS CH 42619 W36A	APP CRS 003°	Rwy Idg TDZE 4600 3318 Apt Elev 3326
--	------------------------	--

RNAV (GPS) RWY 36

SYRACUSE-HAMILTON COUNTY MUNI (3K3)


RNP APCH-GPS.

▼

Baro-VNAV NA when using Lamar altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. Circling to Rwy 13-31 NA at night. VDP NA with Lamar altimeter setting. When local altimeter setting not received, use Lamar altimeter setting: increase LPV DA to 3723 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3932 feet and all visibilities ¾ SM; increase all MDAs 160 feet and visibility Circling Cat A/B ¼ SM and LNAV Cat C and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 5700 direct ISSOY and hold.

AWOS-3 119.975	DENVER CENTER 133.4 377.175	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

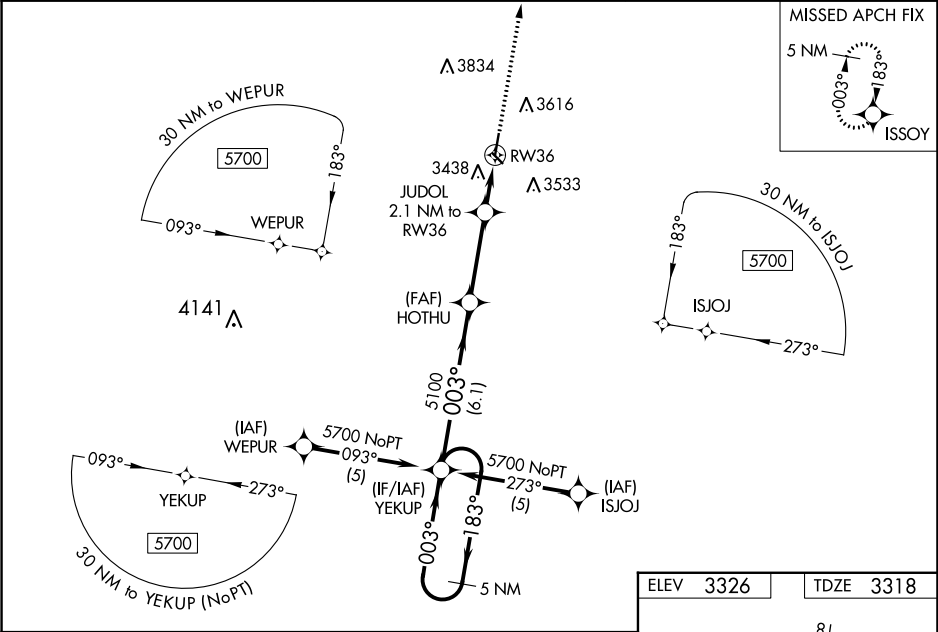

5700 ← 183° 003° →		VGSi and RNAV glidepath not coincident (VGSi Angle 3.20/TCH 44).		5700	ISSOY
GP 3.00° TCH 44		HOTHU		JUDOL	*INAV only
5100		2.1 NM to RW36		*1.1 NM to RW36	RW36
6.1 NM		3.3 NM		1 NM	
1 NM		1 NM		1 NM	
CATEGORY	A	B	C	D	
LPV DA	3569-1	251 (300-1)		NA	
LNAV/VNAV DA	3778-1¾	460 (500-1¾)		NA	
LNAV MDA	3740-1	422 (500-1)	3740-1¼ 422 (500-1¼)	NA	
CIRCLING	3980-1	654 (700-1)	4200-2½ 874 (900-2½)	NA	