RNAV (GPS) RWY 17

YAZOO COUNTY (87I)

WAAS CH 48931 W17A	APP CRS 174°	Rwy Idg 5000 TDZE 105 Apt Elev 105

Baro-VNAV NA. Use Madison altimeter setting; when not received, use Jackson altimeter setting and increase all DA 8 feet and all MDA 20 feet; increase LNAV/VNAV visibility all Cats ⅛ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2000 direct UTASY and hold.

MEMPHIS CENTER	UNICOM
132.5 259.1	122.8 (CTAF) L

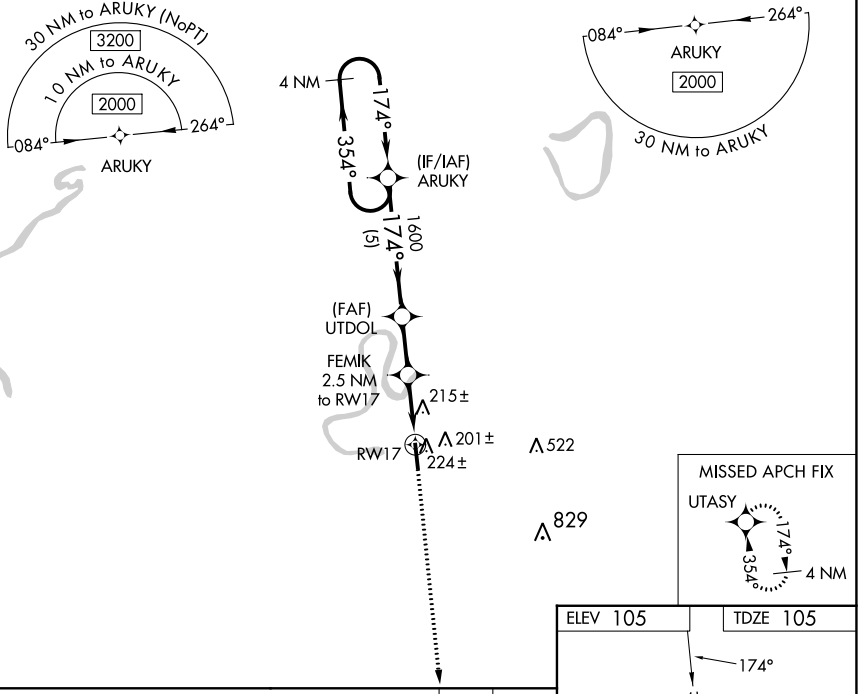

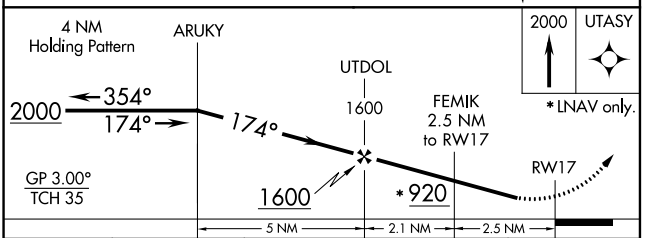

CATEGORY	A	B	C	D
LPV DA	461-1¼	356 (400-1¼)		
LNAV/VNAV DA	622-1¾	517 (600-1¾)		
LNAV MDA	580-1	475 (500-1)	580-1⅜	475 (500-1⅜)
CIRCLING	640-1	535 (600-1)	640-1½ 535 (600-1½)	960-2¾ 855 (900-2¾)

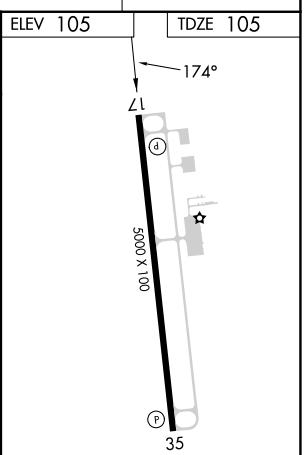

SC-4, 22 FEB 2024 to 21 MAR 2024
SC-4, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 35

YAZOO COUNTY (87I)

WAAS	APP CRS	Rwy Idg	5000
CH 99431	354°	TDZE	105
W35A		Apt Elev	105

RNP APCH.

T A NA — Baro-VNAV NA. Use Madison altimeter setting; when not received, use Jackson altimeter setting and increase all DA 8 feet and all MDA 20 feet.

MISSED APPROACH: Climb to 2000 direct ARUKY and hold.

MEMPHIS CENTER	UNICOM
132.5 259.1	122.8 (CTAF) L

MISSED APCH FIX



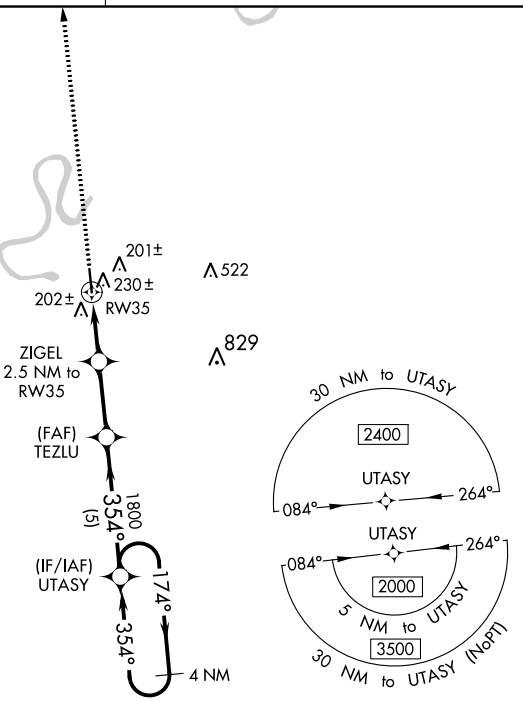

ELEV 105 TDZE 105

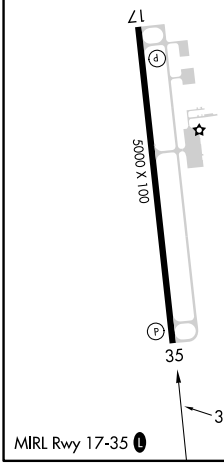

MIRL Rwy 17-35 L

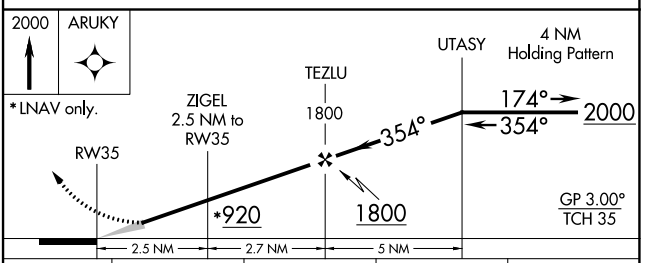

CATEGORY	A	B	C	D
LPV DA	461-1¼ 356 (400-1¼)			
LNAV/VNAV DA	606-1¾ 501 (500-1¾)			
LNAV MDA	600-1 495 (500-1)		600-1⅜ 495 (500-1⅜)	

SC-4, 22 FEB 2024 to 21 MAR 2024
SC-4, 22 FEB 2024 to 21 MAR 2024