

LOC/DME I-ALO 111.7 Chan 54	APP CRS 128°	Rwy Idg 8399 TDZE 873 Apt Elev 873
---	------------------------	---

ILS or LOC RWY 12
WATERLOO RGNL (A.LO)


DME or RADAR required.

▼ For inop ALS, increase S-LOC 12 ZESOP FIX MINIMUMS Cats C/D visibility to RVR 5500.
▲ #RVR 1800 authorized with the use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 3300 on ALO VOR/DME R-096 to DEWAR INT/ALO VOR/DME 10.8 DME and hold.

ATIS 120.65	WATERLOO APP CON ★ 118.9 251.15	WATERLOO TOWER ★ 125.075 (CTAF) 0 257.8	GND CON 121.9 269.1	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

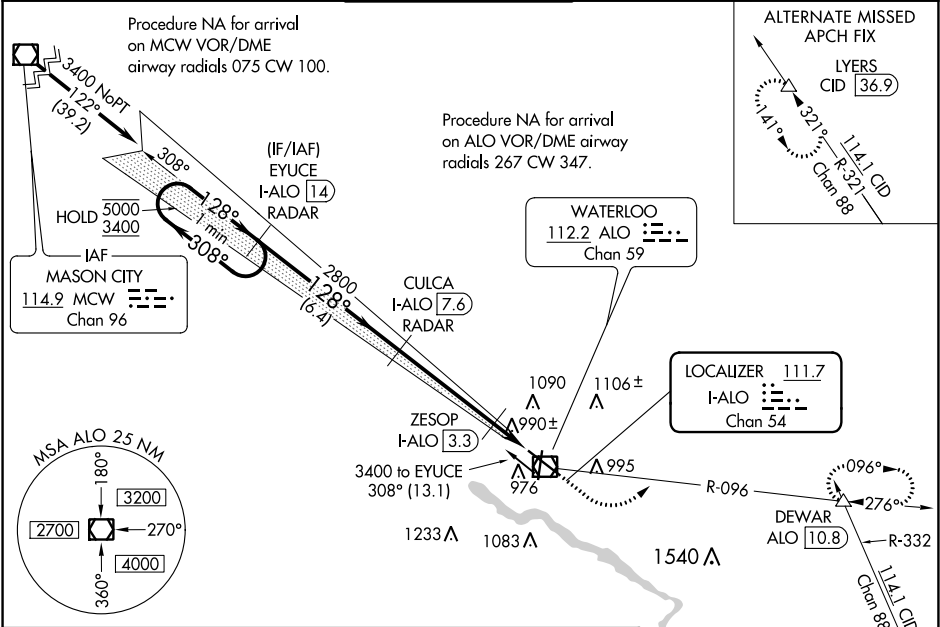

Use IALO DME when on localizer course.				ELEV 873	TDZE 873
One Minute Holding Pattern 5000 ← 308° 3400 → 128° GS 3.00° TCH 55°				EYUCE I-ALO 14 RADAR CULCA I-ALO 7.6 RADAR ZESOP I-ALO 3.3 I-ALO 2.7 I-ALO 1.7 *LOC only	1400 ↑ ALO R-096 DEWAR △
2800 2800 *1420 6.4 NM 4.3 NM 0.6 1 NM				128° 5.9 NM from FAF	
CATEGORY	A	B	C	D	
S-ILS 12 #	1073/24 200 (200-½)				
S-LOC 12	1420/24 547 (600-½)		1420/60 547 (600-1¼)		
CIRCLING	1420-1 547 (600-1)		1480-1¾ 607 (700-1¾)		1600-2¼ 727 (800-2¼)
ZESOP FIX MINIMUMS (DME REQUIRED)					
S-LOC 12	1240/24 367 (400-½)		1240/35 367 (400-¾)		
CIRCLING	1360-1 487 (500-1)	1400-1 527 (600-1)	1480-1¾ 607 (700-1¾)		1600-2¼ 727 (800-2¼)

HIRL Rwy 12-30

MIRL Rwy 18-36

REIL Rwys 18 and 36

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58