

APP CRS	Rwy Idg	4855
179°	TDZE	912
	Apt Elev	912

RNAV (GPS) RWY 18

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)

RNP APCH - GPS.

T When local altimeter setting not received, use Crystal altimeter setting and increase all MDA 40 feet and Circling Cat D visibility $\frac{1}{4}$ SM. VDP NA when using Crystal altimeter setting.

MISSED APPROACH: Climbing left turn to 2600 direct RUNRR and hold.

ATIS
120.625


MINNEAPOLIS APP CO
126.5 335.65

ANOKA TOWER★
132.4 (CTAF) **L**



GND CON
121.85

CLNC DEL
121.3

CLNC DEL
121.85
(When twr closed)

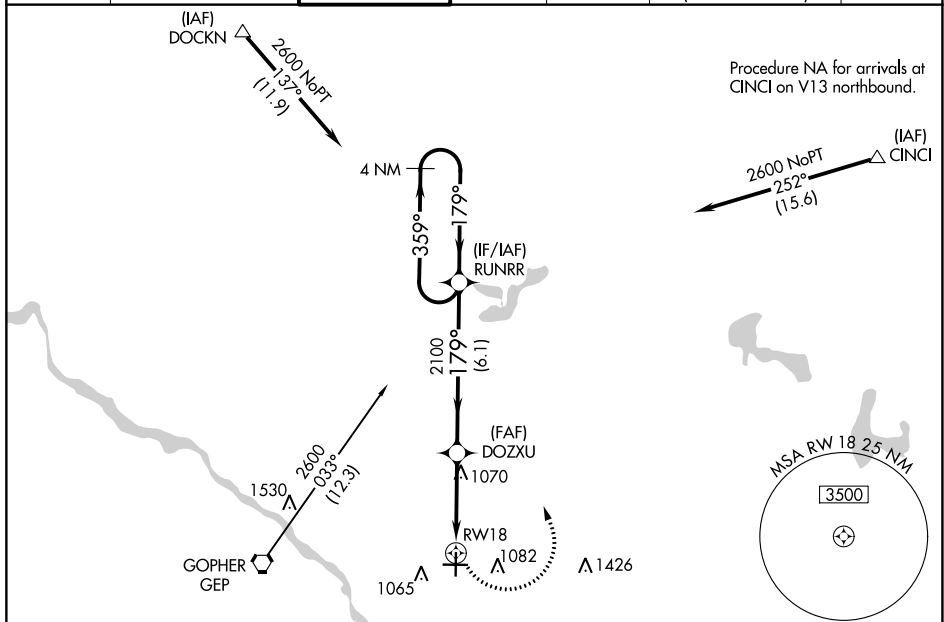UNICOM
122.95

Procedure NA for arrival on GEP VORTAC
airway radials 315 CW 103.

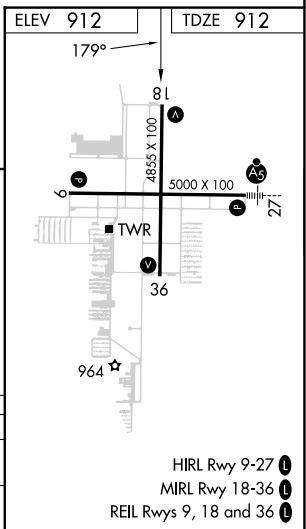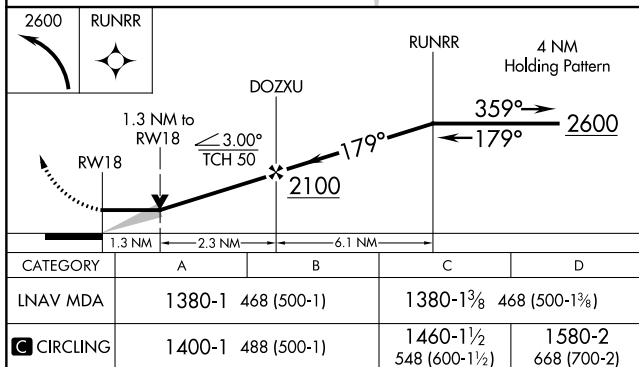

MINNEAPOLIS, MINNESOTA
Orig-G 03NOV22

ANOKA COUNTY/BLAINE (JANES FLD) (ANE)
RNAV (GPS) RWY 18

45°09'N-93°13'W

HIRL Rwy 9-27 **L**
MIRL Rwy 18-36 **L**
REIL Rwy 9, 18 and 36 **L**