

LOC I-ASH	APP CRS	Rwy Idg	5650
109.7	139°	TDZE	200
		Apt Elev	200

ILS or LOC RWY 14

BOIRE FLD (ASH)

▼


▲

For inop ALS, increase CIBES fix minimums
S-LOC 14 Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 1000 then climbing right turn to 4000 on heading 310° and GDM R-071 to JOHNZ INT/GDM 19.8 DME and hold, continue climb-in-hold to 4000.

ATIS	BOSTON APP CON	NASHUA TOWER ★	GND CON	CLNC DEL
125.1	124.9 269.075	133.2 (CTAF) 0	121.8	121.8

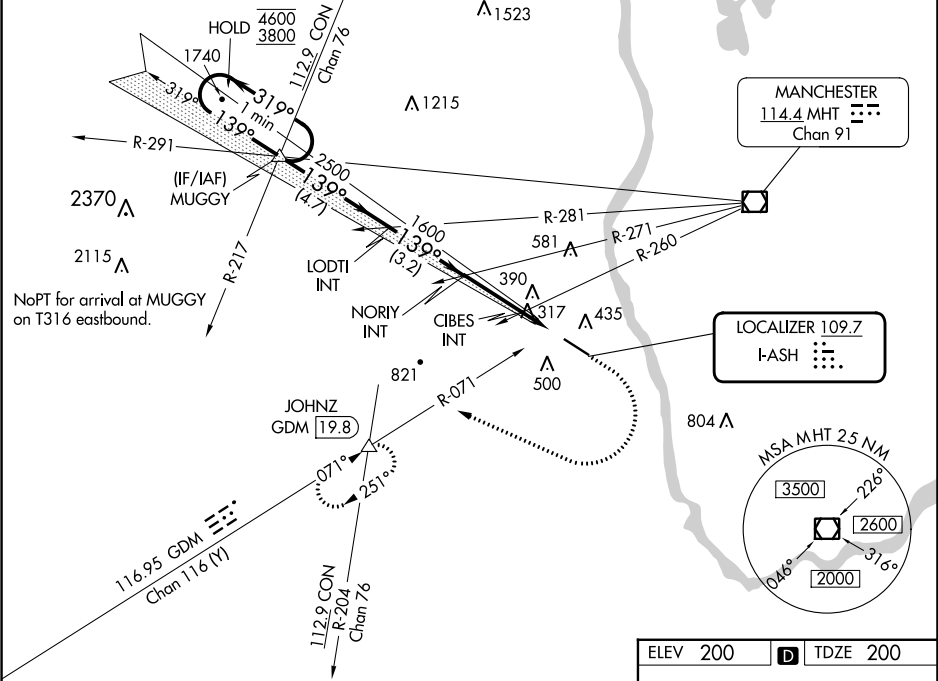

One Minute Holding Pattern				
GS 3.00° TCH 47				
CATEGORY	A	B	C	D
S-ILS 14	400-½ 200 (200-½)			
S-LOC 14	740-½	540 (600-½)	740-1	540 (600-1)
CIRCLING	820-1 620 (700-1)	840-1 640 (700-1)	900-2 700 (700-2)	1000-2½ 800 (800-2½)
CIBES FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 14	580-½	380 (400-½)	580-¾	380 (400-¾)
CIRCLING	820-1 620 (700-1)	840-1 640 (700-1)	900-2 700 (700-2)	1000-2½ 800 (800-2½)

ELEV 200	TDZE 200
FAF to MAP 4.3 NM	
Knots	60 90 120 150 180
Min:Sec	4:18 2:52 2:09 1:43 1:26