


LOC/DME I-LWR 110.7 Chan 44	APP CRS 180°	Rwy Idg TDZE 213 Apt Elev 213
---	------------------------	---

ILS or LOC RWY 17

WEST MEMPHIS MUNI (A W M)

DME or RADAR required.	MALSR
NA For inop ALS, increase S-LOC 17 Cat C/D visibility to 1½ SM and KEHOE FIX MINIMUMS S-LOC 17 Cats C/D visibility to 1 SM.	MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 on GQE VOR/DME R-147 to GQE VOR/DME and hold.

ASOS 118.175	MEMPHIS APP CON 119.1 291.6	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	---------------------------------------	--------------------------	---

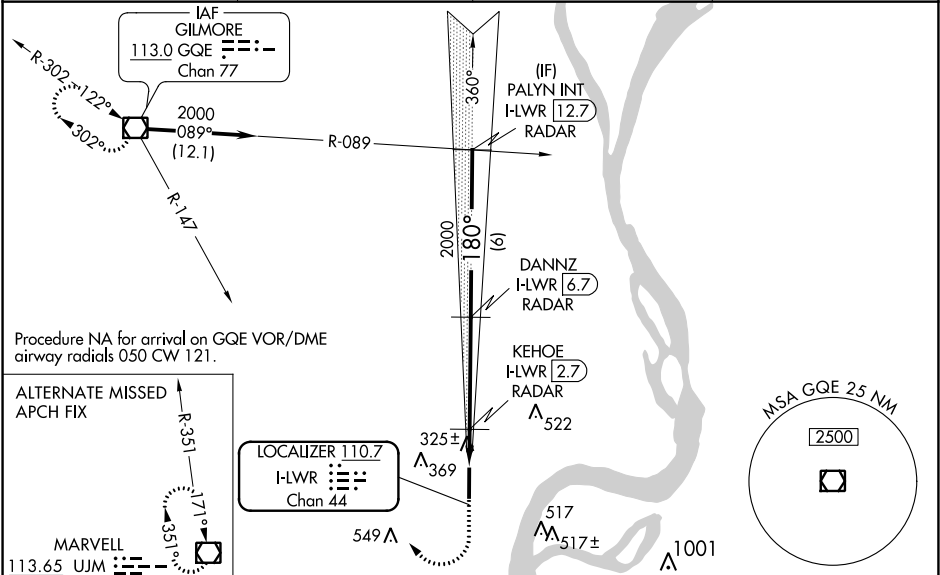

Chan 83 (Y)				669△ 669		ELEV 213	TDZE 213
1000 ↑	2000 GQE R-147	GQE ☐	DANNZ I-LWR 6.7 RADAR	PALYN INT I-LWR 12.7 RADAR			

