WAAS CH 45915 W09A	APP CRS 094°	Rwy ldg 5502 TDZE 141 Apt Elev 141

RNAV (GPS) RWY 9
DECATUR COUNTY INDUSTRIAL AIR PARK (BGE)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP and Baro-VNAV NA when using Tallahassee Intl altimeter setting. When local altimeter setting not received, use Tallahassee Intl altimeter setting and increase LPV DA to 522 feet and LNAV/VNAV DA to 562 feet; increase all MDAs 100 feet and increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C, D visibility ¼ SM and Circling Cat C, D visibility ½ SM.

MISSED APPROACH: Climb to 2600 direct HASUR and hold.

AWOS-3PT	TALLAHASSEE APP CON★	CLNC DEL	UNICOM
121.125	128.7 254.3	124.775 335.65	122.975 L (CTAF)

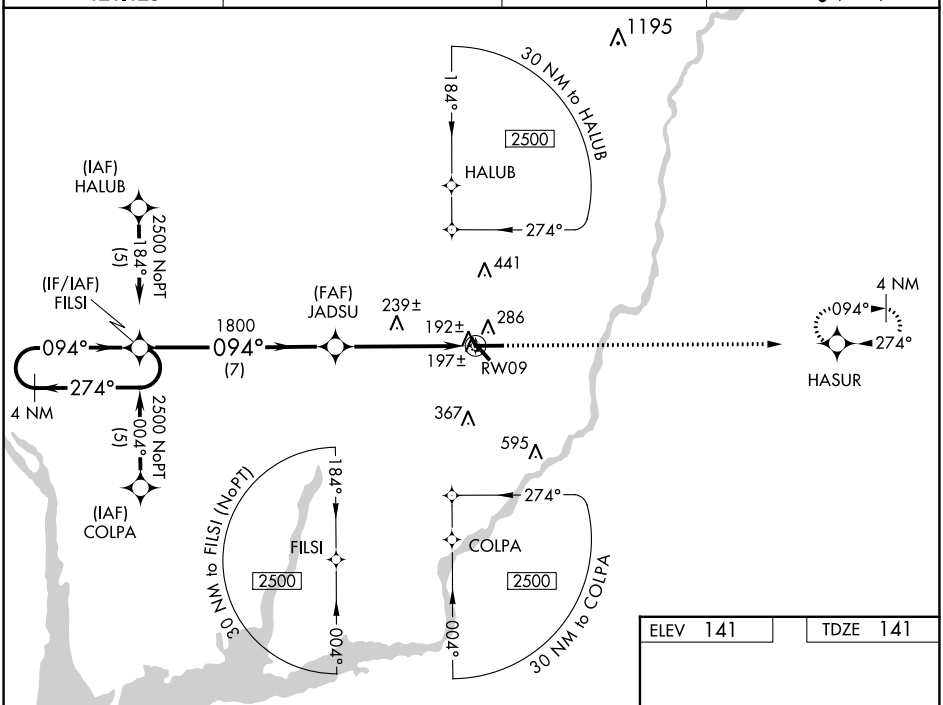

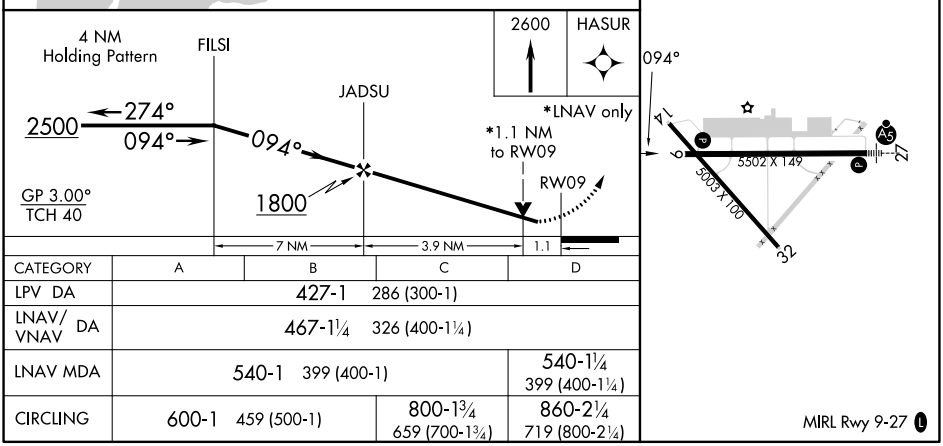

CATEGORY	A	B	C	D
LPV DA	427-1 286 (300-1)			
LNAV/VNAV DA	467-1¼ 326 (400-1¼)			
LNAV MDA	540-1 399 (400-1)			540-1¼ 399 (400-1¼)
CIRCLING	600-1 459 (500-1)		800-1¾ 659 (700-1¾)	860-2¼ 719 (800-2¼)

MIRL Rwy 9-27 L

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024