

WAAS CH 56323 W01A	APP CRS 013°	Rwy Idg TDZE 6750 2495 Apt Elev 2504
--	------------------------	--

RNAV (GPS) RWY 1

RALEIGH COUNTY MEML (BKW)

▼



Baro-VNAV NA when using Bluefield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 28°C (82°F). DME/DME RNP-0.3 NA.

▲

Helicopter visibility reduction below ¾ SM NA. When local altimeter not received, use Bluefield altimeter setting and increase all DA 118 feet and all MDA 120 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cat C/D visibility ½ SM, and Circling Cat A/C visibility ¼ SM.

MISSED APPROACH:
Climb to 5200 direct
YISUK and hold.

ASOS 121.55	CHARLESTON APP CON 125.4 269.125	UNICOM 123.0 (CTAF) 0
-----------------------	--	---------------------------------

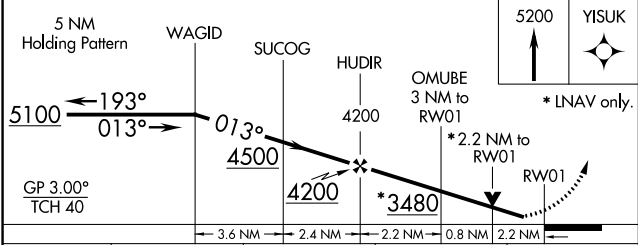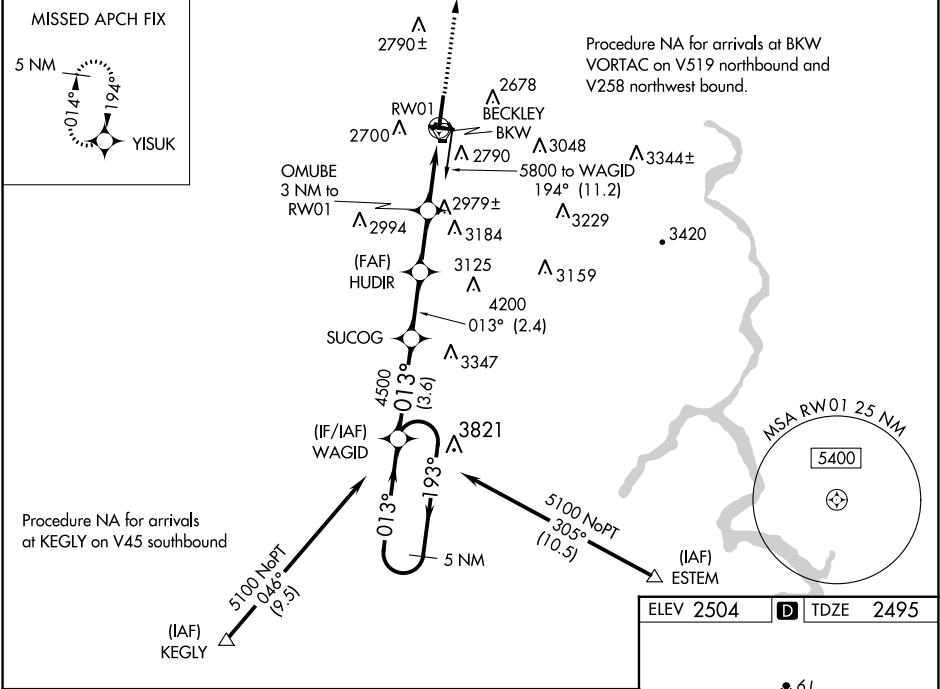

CATEGORY	A	B	C	D
LPV DA		2810-1	315 (400-1)	
LNAV/VNAV DA		3093-2¼	598 (600-2¼)	
LNAV MDA	3240-1 745 (800-1)	3240-1¼ 745 (800-1¼)	3240-2 745 (800-2)	
CIRCLING	3240-1 736 (800-1)	3240-1¼ 736 (800-1¼)	3320-2½ 816 (900-2½)	3500-3 996 (1000-3)

