

LOC I-JDU 111.15	APP CRS 319°	Rwy ldg 10000 TDZE 442 Apt Elev 459
----------------------------	------------------------	--

ILS or LOC RWY 32R

SCOTT AFB/MIDAMERICA ST LOUIS (BLV)


⚠

For inop ALS, increase S-ILS 32R Cat E visibility to RVR 4000 and increase S-LOC visibility to RVR 5000.
* RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 1500 then climbing right turn to 2400 on heading 194° and TOY VORTAC R-144 to EGNOC INT and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

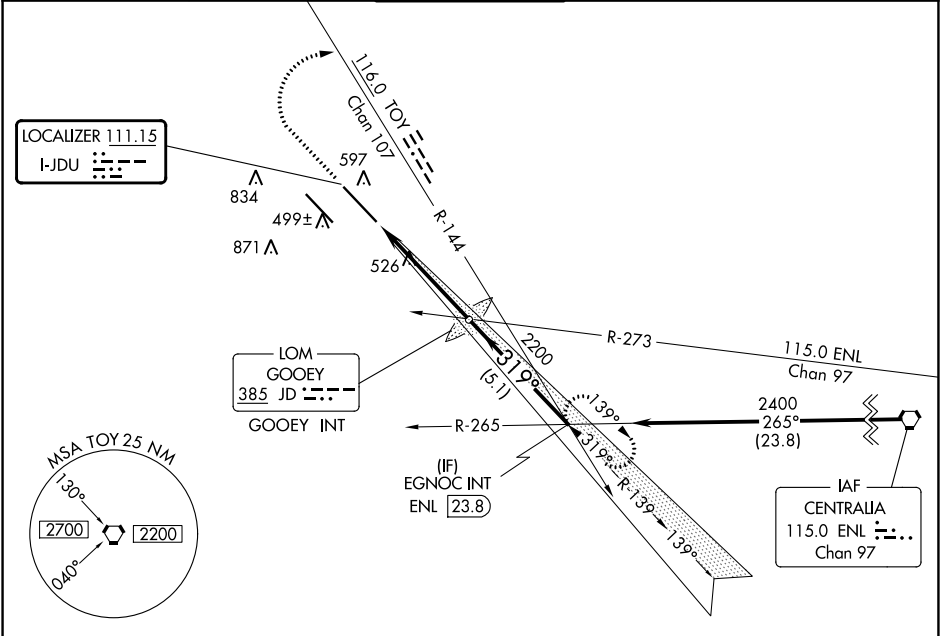

ELEV 459

D

TDZE 442

REIL Rwy 14L

HIRL Rwys 14R-32L and 14L-32R

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

1500

↑

2400

hdg 194°

TOY R-144

EGNOC INT

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

GOOEY LOM/INT

EGNOC INT

2043

2400

319°

2200

GS 3.00° TCH 55

4.9 NM

5.1 NM

CATEGORY	A	B	C	D	E
S-ILS 32R *	642/24 200 (200-½)				
S-LOC 32R	780/24	338 (400-½)	780/26	338 (400-½)	
CIRCLING	1000-1	1120-1	1240-2¼	1240-2½	1240-2¾
	541 (600-1)	661 (700-1)	781 (800-2¼)	781 (800-2½)	781 (800-2¾)