

TACAN SKE Chan 59 (112.2)	APP CRS 134°	Rwy Idg TDZE 459 Apt Elev 459
--	------------------------	---

TACAN RWY 14R


SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

For inop ALS, increase S-14R Cat E visibility to 1½ SM.

ALSF-1

MISSED APPROACH: Climb to 2400 on SKE R-142 to WOMUG/14.1 DME and hold.

ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 263.025
------------------------------	--	------------------------------------	-------------------------------	------------------------------------

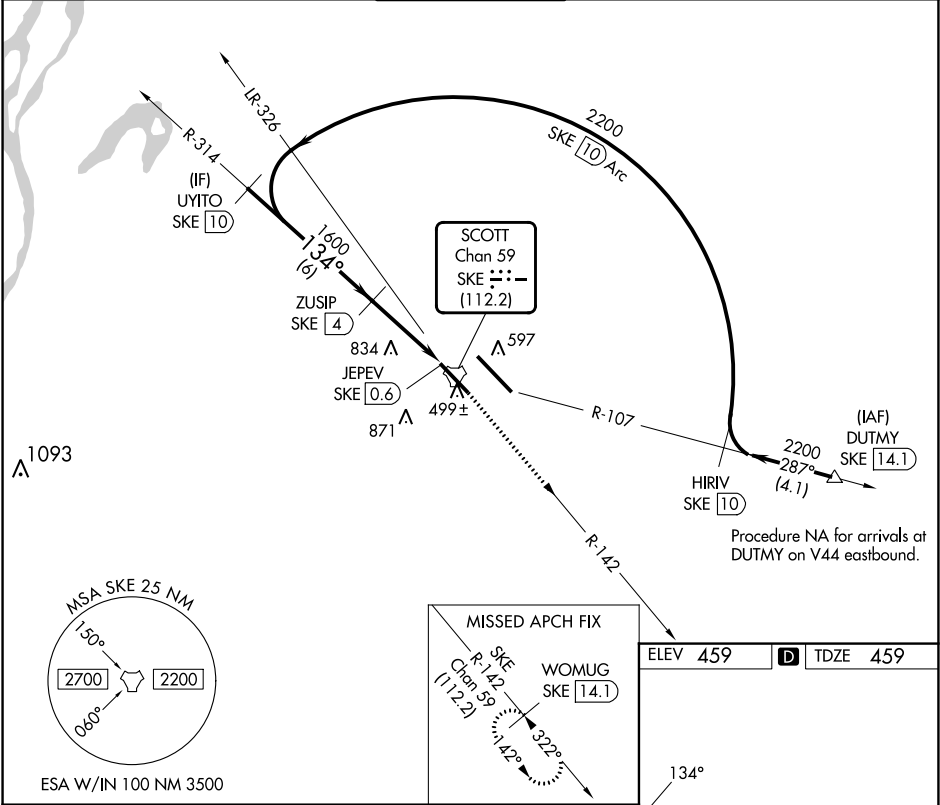

UYITO SKE 10						VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 50).						2400	WOMUG SKE 14.1
2200						134°						SKE R-142	JEPEV SKE 0.6
1600						3.00° TCH 65							
6 NM						1.5 NM						1.9 NM	
CATEGORY	A		B		C		D		E				
S-14R	1100/24		641 (700-½)		1100-1⅓		641 (700-1⅓)						
CIRCLING	1100-1 641 (700-1)		1120-1 661 (700-1)		1240-2¼ 781 (800-2¼)		1240-2½ 781 (800-2½)		1240-2¾ 781 (800-2¾)		REIL Rwy 14L HIRL Rwy 14L-32R and 14R-32L		