

WAAS CH 69233 W02A	APP CRS 021°	Rwy Idg TDZE Apt Elev	5927 4967 4970
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2


CLAYTON MUNI AIRPARK (CAO)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C (4°F) or above 54°C (130°F). Circling NA west of Rwy 2-20. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dalhart altimeter setting and increase all DA 227 feet and all MDA 240 feet, increase LPV all Cats visibility $\frac{3}{8}$ mile, increase LNAV/VNAV all Cats visibility $\frac{1}{8}$ mile, increase LNAV Cat C visibility $\frac{5}{8}$ mile, and increase Circling Cat C visibility $\frac{1}{4}$ mile. Baro-VNAV NA when using Dalhart altimeter setting. VDP NA with Dalhart altimeter setting.

MISSED APPROACH: Climb to 8000 direct CEBBA and hold, continue climb-in-hold to 8000.

ASOS 120.625	ALBUQUERQUE CENTER 127.85 285.475	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

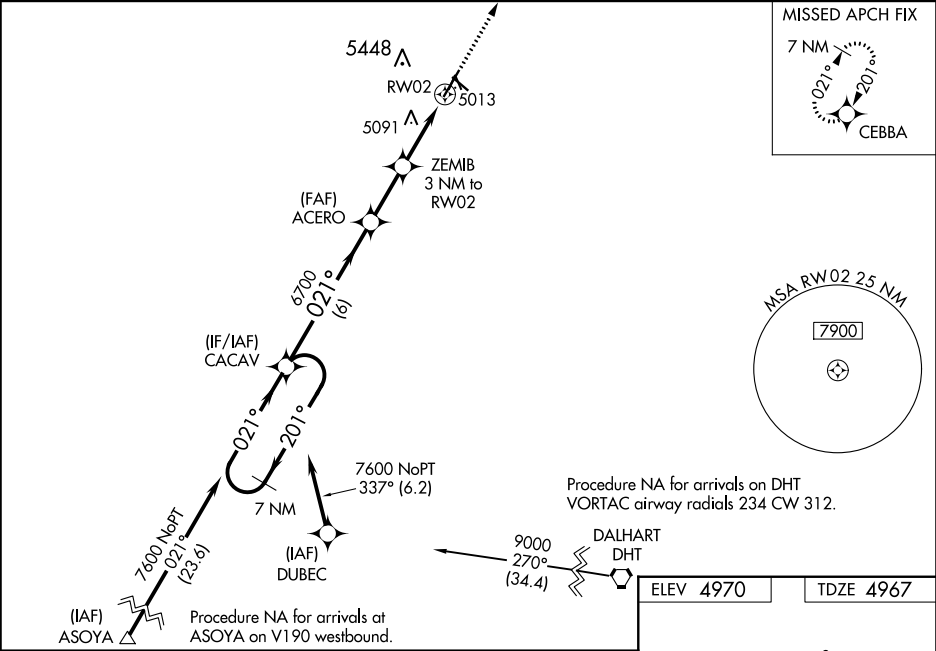

7 NM Holding Pattern		CACAV	ACERO	ZEMIB 3 NM to RW02	1.1 NM to RW02	1.1 NM	8000 ↑	CEBBA ✦
7600 ← 201° → 021°		021°	6700	*5960			* LNAV only.	
GP 3.00° TCH 49			6700					
		6 NM	2.3 NM	1.9 NM	1.1 NM			
CATEGORY	A	B	C	D				
LPV DA	5217-3/4 250 (300-3/4)				NA			
LNAV/ VNAV DA	5367-13/8 400 (400-13/8)				NA			
LNAV MDA	5360-1	393 (400-1)	5360-11/8 393 (400-11/8)		NA			
CIRCLING	5360-1 390 (400-1)	5420-1 450 (500-1)	5420-11/2 450 (500-11/2)		NA			

