

WAAS CH 97619 W22A	APP CRS 224°	Rwy Idg TDZE Apt Elev	6502 750 755
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

UNIVERSITY OF ILLINOIS/WILLARD (CMI)

RNP APCH - GPS.

▼


⚠

ASR


Rwy 22 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH:
Climb to 2300 direct BOSTN and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	CLNC DEL 128.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

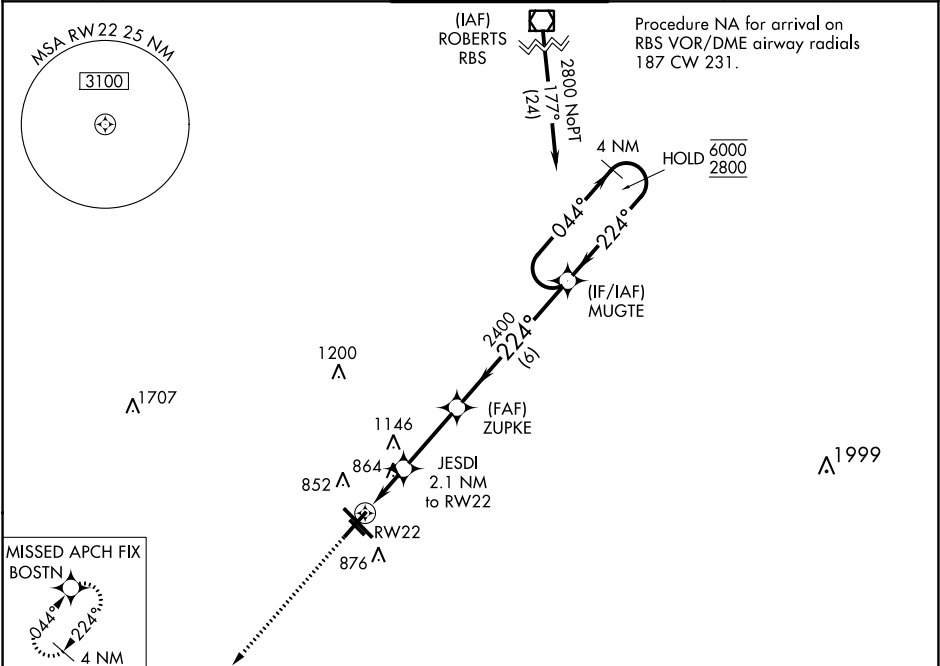

ELEV 755	D	TDZE 750
-----------------	----------	-----------------

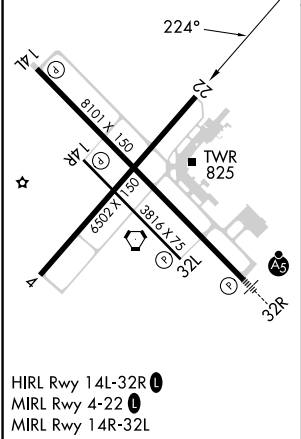

2300 BOSTN		MUGTE		4 NM Holding Pattern	
JESDI 2.1 NM to RW22		ZUPKE 2400		044° → 6000 ← 224° 2800	
RW22 1460		2400		GP 3.00° TCH 43	
1 NM		1.1 NM		2.9 NM	
6 NM					
CATEGORY	A	B	C	D	
LPV DA	1000- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)				
LNAV/VNAV DA	1219-1 $\frac{3}{8}$ 469 (500-1 $\frac{3}{8}$)				
LNAV MDA	1120-1 370 (400-1)				
CIRCLING	1240-1	485 (500-1)	1500-2 $\frac{1}{4}$ 745 (800-2 $\frac{1}{4}$)	1500-2 $\frac{1}{2}$ 745 (800-2 $\frac{1}{2}$)	