

WAAS CH 49112	APP CRS 352°	Rwy Idg TDZE 6075
W35A		Apt Elev 6187


RNAV (GPS) Y RWY 35L
CITY OF COLORADO SPRINGS MUNI (COS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR increase LNAV Cat C and D visibility to RVR 5500. RADAR monitoring required when R-2601 in use. # RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH:
Climb to 6700 then climbing right turn to 9000 direct ADANE and hold.

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
----------------------------	---	-------------------------------------	-------------------------------	-----------------------------------

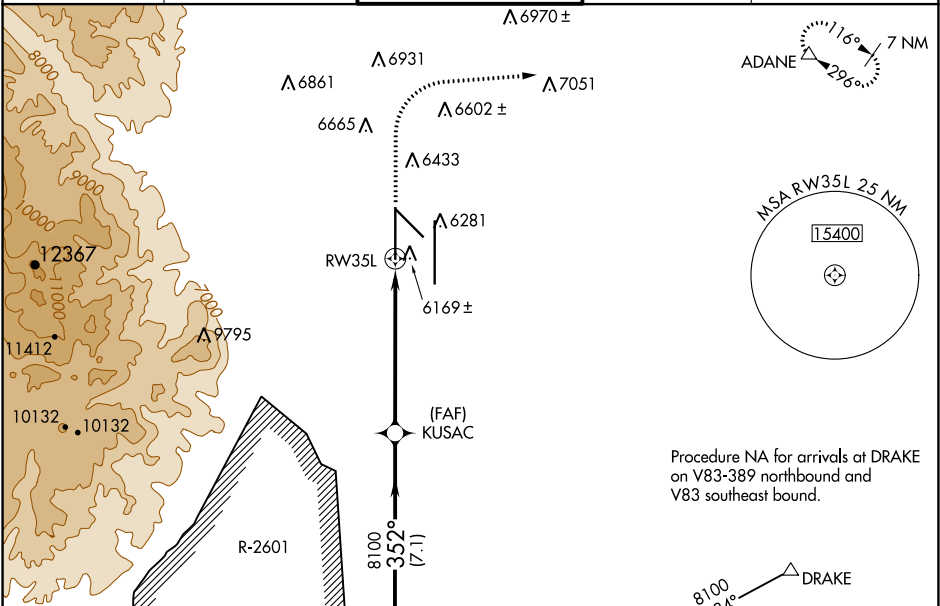

ELEV 6187	D	TDZE 6075
MIRL Rwy 13-31		
HIRL Rwy 17R-35L and 17L-35R		
REIL Rwy 13, 17R, 31 and 35R		
TDZ/CL Rwy 17L and 35R		

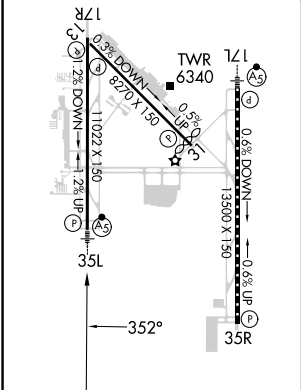

Procedure NA for arrivals at DRAKE on V83-389 northbound and V83 southeast bound.

8100 234° (8.9) DRAKE

8100 280° (6.7) (IAF) ASHLL

8100 213° (4.1) (IAF) PUEBLO PUB

Procedure NA for arrivals on PUB VORTAC airway radials 267 CW 354.

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).		6700	9000	ADANE
MIDAY		*1 NM to RW35L *LNAV only		
GP 3.00° TCH 55		8100 352° 8100		
		7.1 NM 5.3 NM 1 NM		
CATEGORY	A	B	C	D
LPV DA #	6275/24		200 (100-½)	
LNAV/VNAV DA	6380/30		305 (200-⅝)	
LNAV MDA	6440/24	365 (300-½)	6440/35	365 (300-⅝)
C CIRCLING	6740-1 553 (600-1)	6800-1 613 (700-1)	7040-2½ 853 (900-2½)	7260-3 1073 (1100-3)

SW-1, 22 FEB 2024 to 21 MAR 2024

SW-1, 22 FEB 2024 to 21 MAR 2024