

NDB DXB 385	APP CRS 354°	Rwy ldg TDZE Apt Elev	5494 197 202
-----------------------	------------------------	-----------------------------	---

NDB RWY 36


BEAUREGARD RGNL (DRI)

NA Inoperative table does not apply. Visibility reduction by helicopters NA. When local altimeter setting not received, use Fort Polk altimeter setting and increase all MDAs 60 feet and S-36 visibility Cat D 1/2 SM and Circling Cats C/D 1/4 SM.



ODALS

MISSED APPROACH: Climb to 1000 then climbing left turn to 1700 direct DXB NDB and hold.

AWOS-3PT 118.225	POLK APP CON 123.7 261.3	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

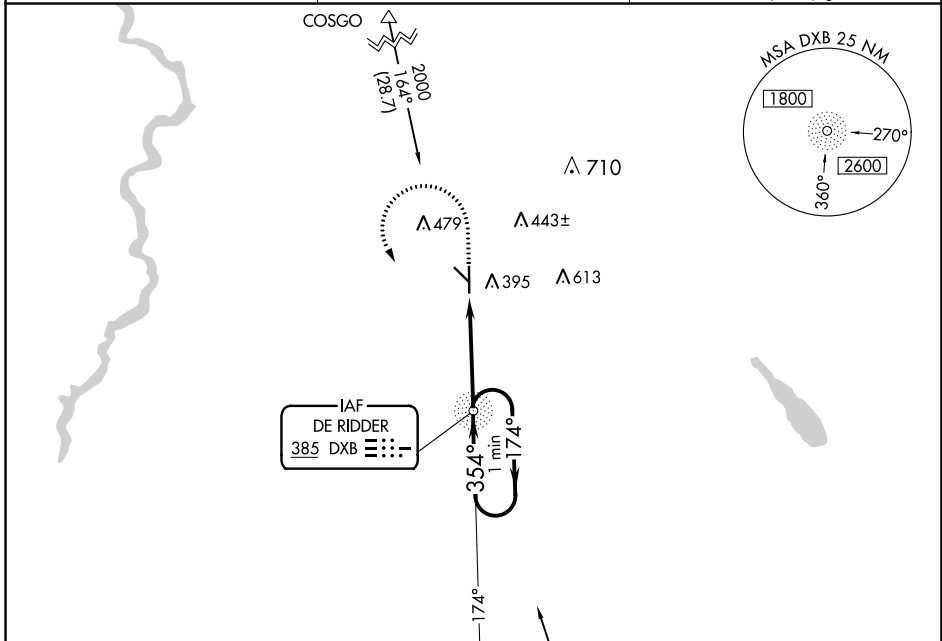

ELEV 202	TDZE 197
----------	----------

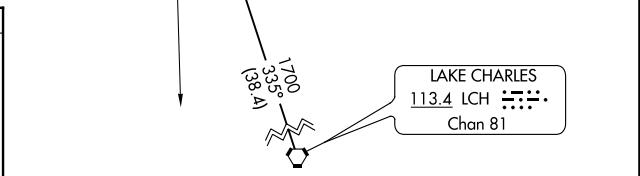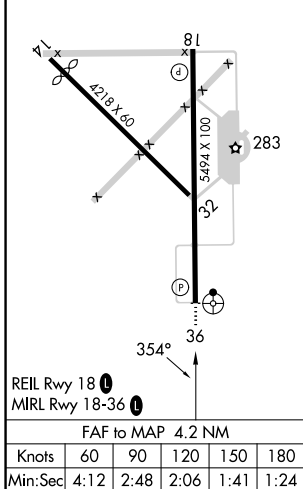

1000	1700	DXB	DXB NDB	One Minute Holding Pattern
				VGS1 and descent angles not coincident (VGS1 Angle 3.00/TCH 50).

CATEGORY	A	B	C	D
S-36	700-1	503 (500-1)	700-1½	503 (500-1½)
CIRCLING	720-1	518 (600-1)	780-1½	1000-2½ 578 (600-1½) 798 (800-2½)

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024