


WAAS CH 40237 W14A	APP CRS 141°	Rwy Idg TDZE 1117 Apt Elev 1122	3851
--	------------------------	---	-------------

RNAV (GPS) RWY 14
WEBSTER CITY MUNI (EBS)


⚠ Baro-VNAV NA when using Clarion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clarion altimeter setting and increase all DAs 49 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct OLTOE and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

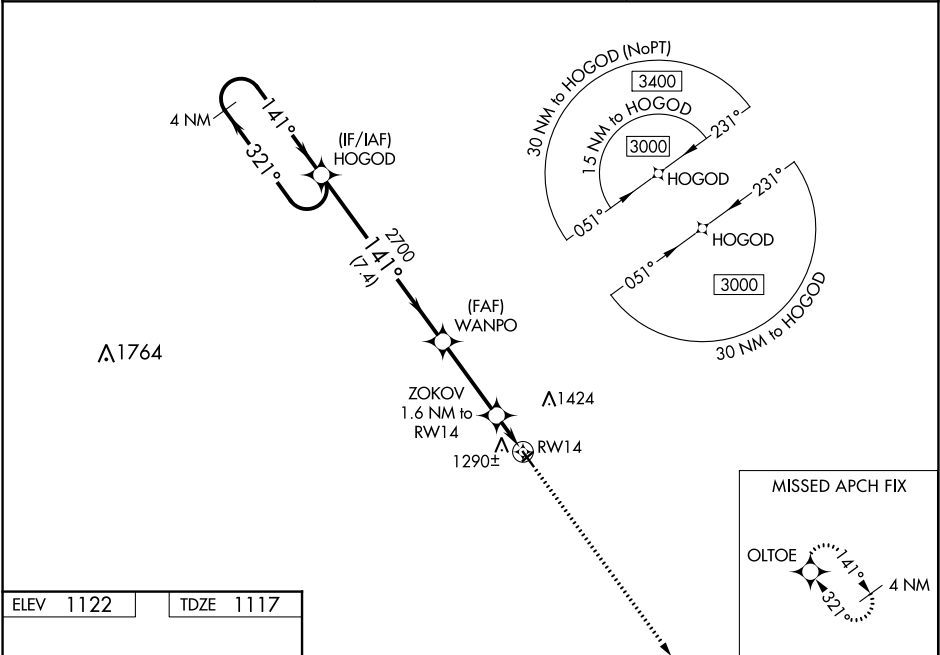

ELEV 1122	TDZE 1117
------------------	------------------

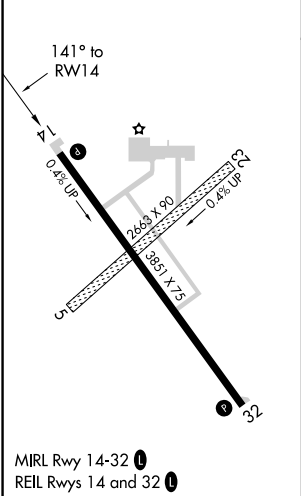

4 NM

Holding Pattern

HOGOD

VGSI and RNAV glidepath not coincident

(VGSI Angle 3.25/TCH 25).

3000

OLTOE

321°

141°

GP 3.00°

TCH 40

3000

↑

*LNNAV only

WANPO

2700

ZOKOV

1.6 NM to RW14

2700

*1640

RW14

7.4 NM

3.3 NM

1.6 NM

CATEGORY	A	B	C	D
LPV DA	1367-1	250 (300-1)		NA
LNNAV/VNAV DA	1463-1¼	346 (400-1¼)		NA
LNNAV MDA	1540-1	423 (500-1)		NA
CIRCLING	1600-1	478 (500-1)		NA