

WAAS CH 99424 W23A	APP CRS 230°	Rwy Idg TDZE Apt Elev	5001 847 847
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 23

SHELBY-CLEVELAND COUNTY RGNL (EHO)

RNP APCH.


▼

▲

Baro-VNAV NA when using Charlotte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use Charlotte altimeter setting and increase all DA 88 feet and all MDA 100 feet; increase LPV all Cats visibility ½ SM and LNAV/VNAV all Cats, LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZISUG and hold.

AWOS-3 118.425	CHARLOTTE APP CON 120.05 257.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

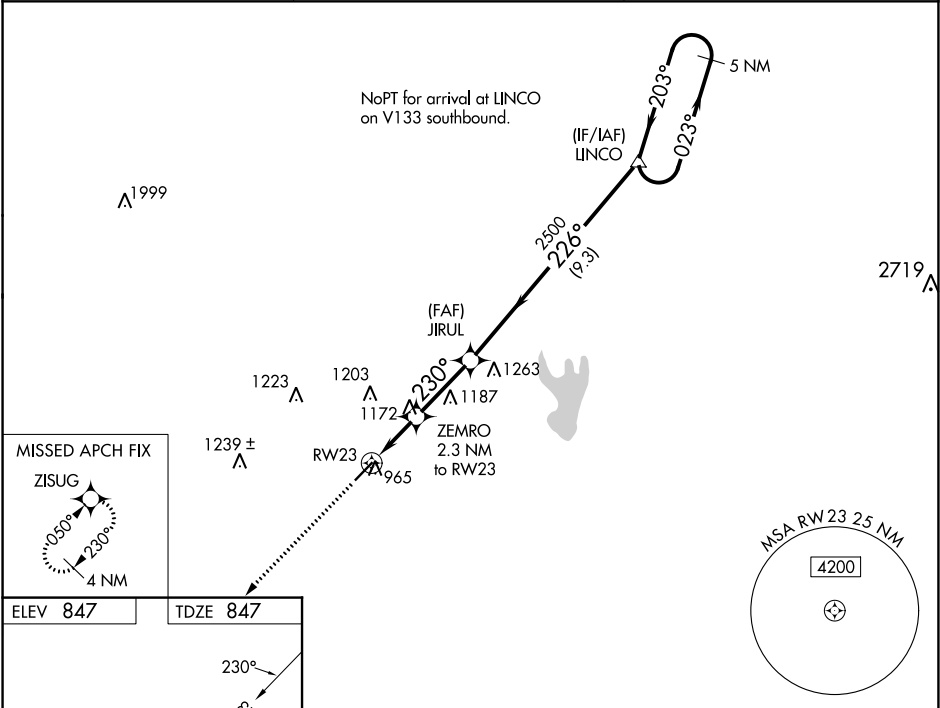

ELEV 847

TDZE 847

3000

ZISUG

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).

5 NM Holding Pattern

* LNAV only.

ZEMRO 2.3 NM to RW23

JIRUL 2500

LINCO

RW23

230°

226°

023°

203°

4000

*1600

2500

GP 3.00° TCH 40

2.3 NM

2.8 NM

9.3 NM

CATEGORY	A	B	C	D
LPV DA	1097-1 250 (300-1)			
LNAV/VNAV DA	1123-1 276 (300-1)			
LNAV MDA	1440-1 593 (600-1)		1440-1¾ 593 (600-1¾)	

MIRL Rwy 5-23 0