

WAAS CH 50333 W01A	APP CRS 013°	Rwy Idg 3200 TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 1
KEWANEE MUNI (EZI)

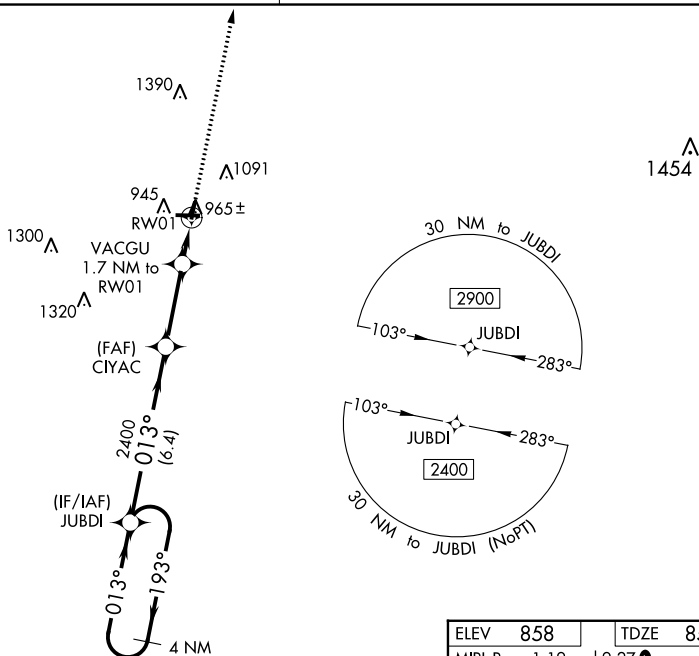
T Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.
A NA Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility $\frac{1}{8}$ mile, and Circling Cat C visibility $\frac{1}{4}$ mile.

MISSED APPROACH:
Climb to 2400 direct
YABYU and hold.

QUAD CITY APP CON ★
133.275 257.8

UNICOM
122.8 (CTAF) **L**

MISSED APCH FIX

4 NM
Holding Pattern

JUBDI

CIYAC

*LNAV only

2400	YABYU
------	-------

$$\frac{2400}{0.128} \leftarrow 193^\circ$$

013°-

VACGU
1.7 NM to

RW01

*142

A horizontal line representing a 1D lattice is divided into three segments by two vertical tick marks. The segments are labeled with their lengths: 6.4 nm, 3 nm, and 1.7 nm.

CATEGORY		A	B	C	D
LPV	DA	1182-1½ 325 (400-1½)			NA
RNAV/ VNAV	DA	1212-1¼ 355 (400-1¼)			NA
RNAV	MDA	1300-1 443 (500-1)		1300-1¾ 443 (500-1¾)	NA
 CIRCLING		1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1¾ 662 (700-1¾)	NA

