

VORTAC GGG 112.9 Chan 76	APP CRS 306°	Rwy Idg 9200 TDZE 354 Apt Elev 365
---------------------------------------	------------------------	---

VOR/DME or TACAN RWY 31
EAST TEXAS RGNL (GGG)

T When local altimeter setting not received, use Gilmer altimeter setting and increase all MDA 60 feet and increase S-31 Cats C/D/E and Circling Cats C/D/E visibility $\frac{1}{4}$ SM. VDP NA when using Gilmer altimeter setting.

MISSED APPROACH: Climb to 800, then climbing left turn to 2500 via GGG R-172 to PIPES INT and hold.

ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2 (CTAF) 0 377.05	GND CON 121.6	UNICOM 122.95
-----------------------	---	---	-------------------------	-------------------------

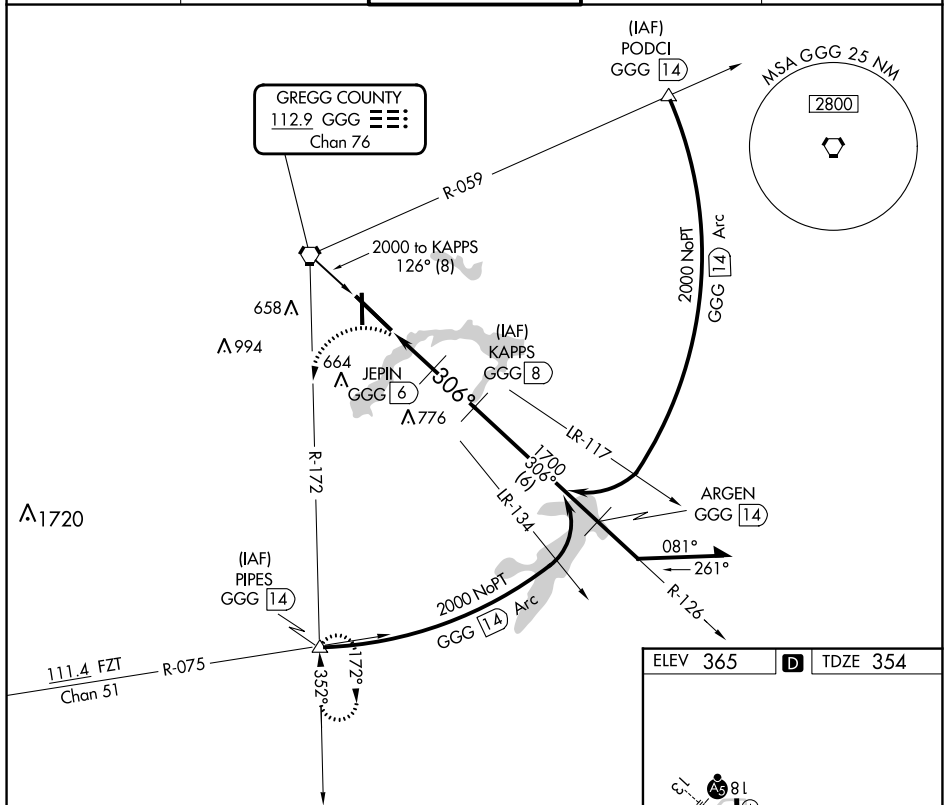


Diagram illustrating the KAPPS GGG 8 approach procedure. Key waypoints and altitudes are shown:

- 800 (Altitude)
- 2500 (Altitude)
- PIPES (Waypoint)
- GGG R-172 (Waypoint)
- KAPPS GGG 8 (Waypoint)
- ARGON GGG 14 (Waypoint)
- JEPIN GGG 6 (Waypoint)
- GGG 5 (Waypoint)
- GGG 3.9 (Waypoint)
- Altitudes: 1060*, 1700, 2000
- Angles: 126°, 306°, 306°
- Distances: 1.1 NM, 1 NM, 2 NM, 6 NM
- Note: *1120 when using Gilmer altimeter setting.
- Note: Remain within 15 NM

CATEGORY	A	B	C	D	E
S-31	780-1	426 (500-1)	780-1½ 426 (500-1½)		
CIRCLING	860-1	495 (500-1)	980-1¾ 614 (700-1¾)	1080-2¼ 714 (800-2¼)	1080-2½ 715 (800-2½)

