

APP CRS	Rwy Idg	11014
063°	TDZE	256
	Apt Elev	305

RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

RNP AR APCH - GPS.

▼


For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP *0.30 all Cats visibility to ¾ SM and RNP 0.30 all Cats visibility to 1½ SM.
*Missed approach requires a minimum climb of 276 feet per NM to 1400.

MALSR

AS

MISSED APPROACH: Climb to 3000 via track 063° to WABOX and hold.

ATIS	GUAM CERAP	AGANA TOWER	GND CON	CLNC DEL
119.0	119.8 269.0	118.1 340.2	121.9 336.4	121.9

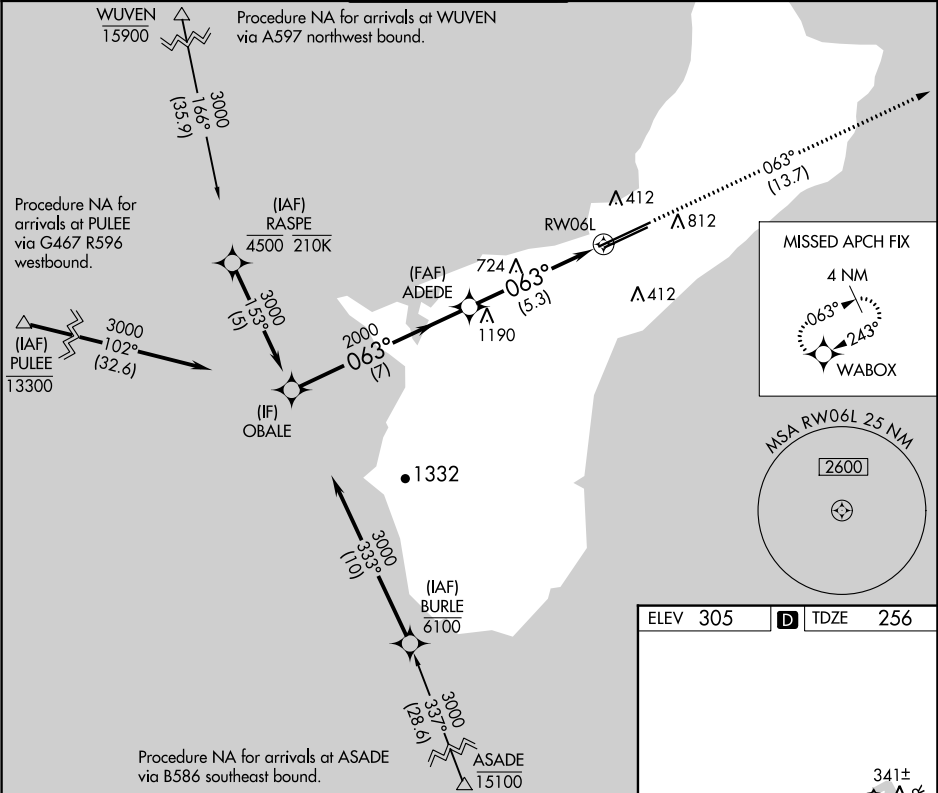

Procedure Turn NA

3000

GP 3.00° TCH 50

OBAL

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73)

3000

063°

2000

7 NM

5.3 NM

tr 063°

WABOX

GP 3.00° TCH 50

270±

0.5% UP

12014 X 150

0.8% UP

0.7% DOWN

0.6% DOWN

341±

554

TWR 352

063°

CATEGORY	A	B	C	D
RNP 0.30* DA		514-½	258 (300-½)	
RNP 0.30 DA		656-⅝	400 (400-⅝)	

AUTHORIZATION REQUIRED

HIRL all Rwys