



ILS or LOC RWY 23

LOC I-RSM 109.5	APCH CRS 226°	Rwy Idg TDZE Arpt Elev 12,501 799 811	[USAF]	GRISSOM ARB (KGUS)
RADAR, TACAN required.			ALSF-1 	MISSED APPROACH: Climb to 3000 on the GUS VORTAC R-232 to BURLI and hold. Missed approach requires use of RNAV or ATC RADAR monitoring.
* When ALS inop, increase RVR to 40 and vis to ¾ mile. ** When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE vis to 1¾ miles.				

ATIS	APP CON	TOWER ★	GND CON	CLNC DEL
108.45 270.8	121.05 351.8 123.85 291.675 (E) (W)	133.7 290.45	128.425 275.8	128.425 275.8

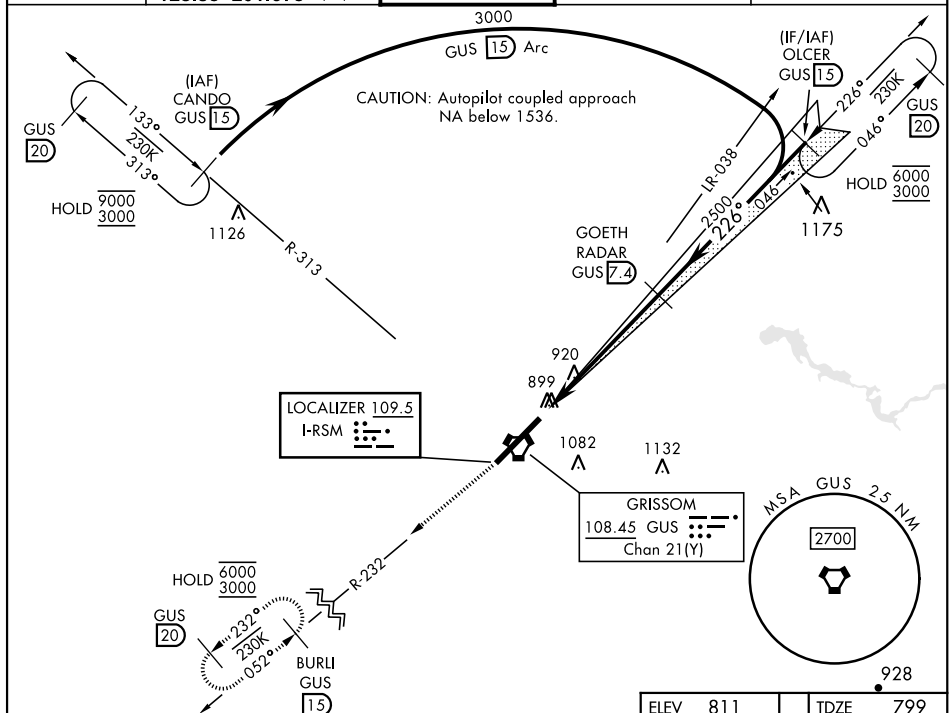

EMERG SAFE ALT 100 NM 3500

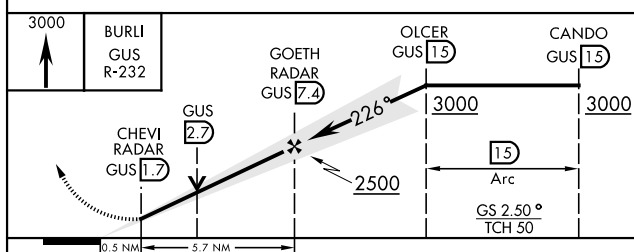

CATEGORY	A	B	C	D	E
S-ILS 23*	999/24		200	(200-½)	
S-LOC 23**	1260/24	461 (500-½)	1260/50		461 (500-1)
C CIRCLING	1340-1	529 (600-1)	1400-1½ 589 (600-1½)	1400-2 589 (600-2)	1440-2½ 629 (700-2½)

