

WAAS CH 99417 W17A	APP CRS 173°	Rwy Idg TDZE 1553 Apt Elev 1563
--	------------------------	---

RNAV (GPS) RWY 17



HOBART RGNL (HBR)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase all DA 71 feet and all MDA 80 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cats C and D and Circling Cat C visibility ¼ mile. Baro-VNAV NA when using Altus/Quartz Mountain altimeter setting. VDP NA with Altus/Quartz Mountain altimeter setting.

MISSED APPROACH: Climb to 4000 direct DOMLE and hold.

ASOS 133.325	ALTUS APP CON ★ 125.1 353.7	UNICOM 122.8 (CTAF)
------------------------	---------------------------------------	-------------------------------

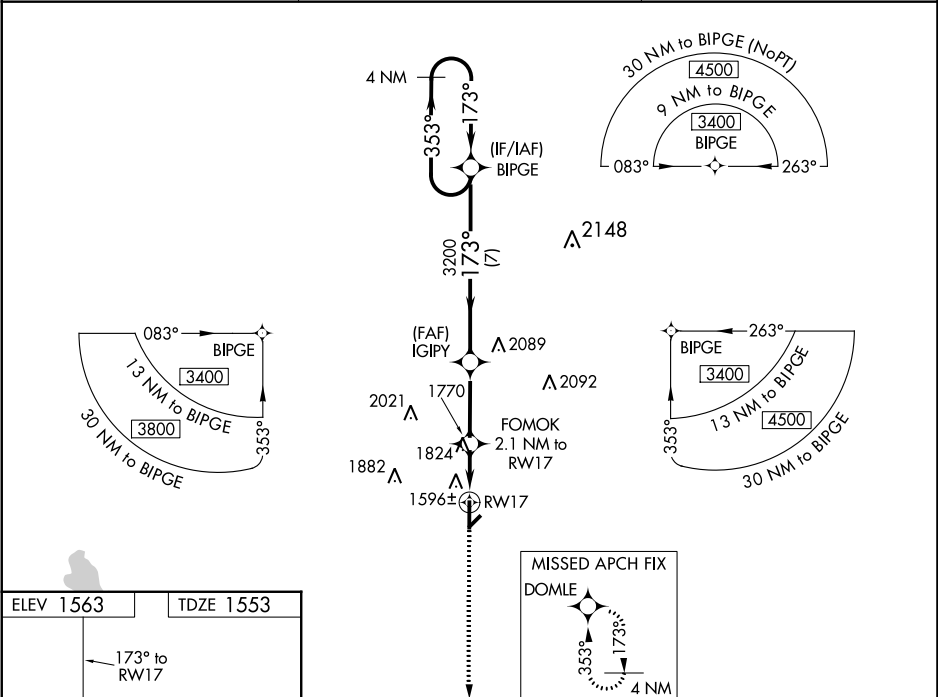

ELEV 1563 TDZE 1553		4000 DOMLE		4 NM Holding Pattern	
*LNAV only.		FOMOK 2.1 NM to RW17		IGIPY 3200	
RW17		*1.6 NM to RW17		BIPGE 3400	
1.6		0.5		2.9 NM	
2240*		3200		7 NM	
CATEGORY		A		B	
LPV DA		1803-1		250 (300-1)	
LNAV/VNAV DA		1900-1¼		347 (400-1¼)	
LNAV MDA		2080-1 527 (600-1)		2080-1½ 527 (600-1½)	
CIRCLING		2080-1 517 (600-1)		2320-2¼ 757 (800-2¼)	
				2460-3 897 (900-3)	