

WAAS CH 86232 W13A	APP CRS 126°	Rwy Idg 5601 TDZE 593 Apt Elev 595
--	------------------------	---

RNAV (GPS) RWY 13
SAN MARCOS RGNL (HYI)


RNP APCH-GPS.


⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats.
⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.


MALS

MISSED APPROACH:
Climb to 3000 direct
HODAL and hold.

ATIS ★ 120.825	AUSTIN APP CON 119.0 370.85	SAN MARCOS TOWER★ 126.825 (CTAF) 0	GND CON 120.125	CLNC DEL 120.125	CLNC DEL 121.35 (when twr closed)
--------------------------	---------------------------------------	---	---------------------------	----------------------------	--

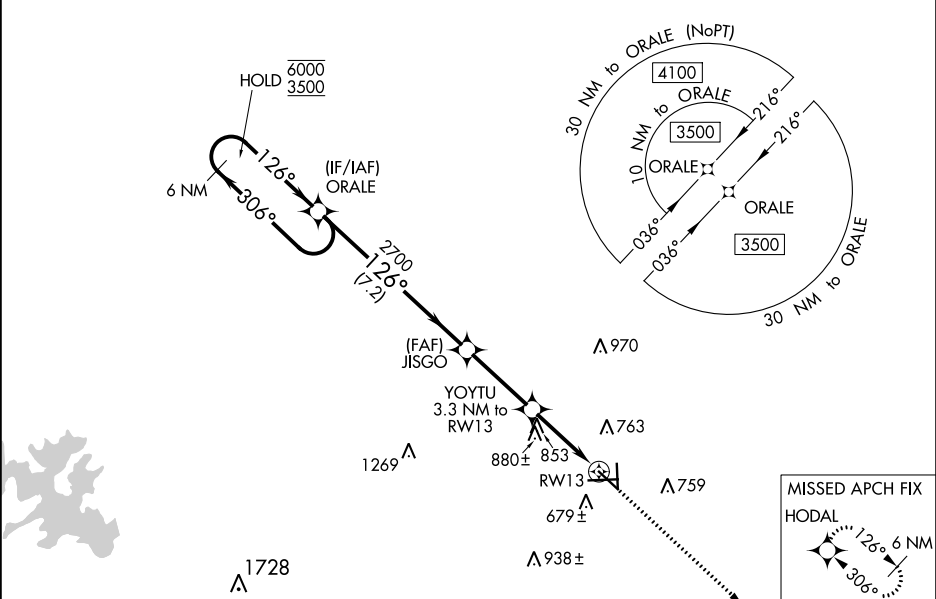

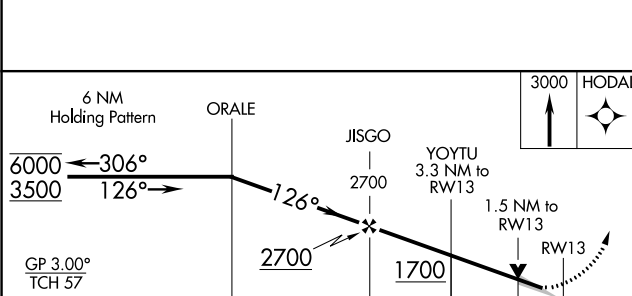6 NM Holding Pattern ORALE JISGO YOYTU 3.3 NM to RW13 1.5 NM to RW13 RW13 3000 HODAL   6000 ← 306° 3500 ← 126° → GP 3.00° TCH 57 2700 1700 7.2 NM 3.1 NM 1.8 NM 1.5 NM 					
CATEGORY	A	B	C	D	E
LPV DA	793-¾		200 (200-¾)		
LNAV/VNAV DA	946-¾		353 (400-¾)		
LNAV MDA	1120-¾	527 (600-¾)	1120-1¼		527 (600-1¼)
 CIRCLING	1120-1	525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

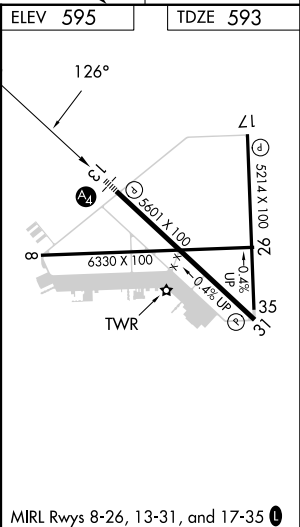

SC-3, 22 FEB 2024 to 21 MAR 2024

SC-3, 22 FEB 2024 to 21 MAR 2024