

VORTAC CVG	APP CRS	Rwy Idg	2589
117.3	171°	TDZE	584
Chan 120		Apt Elev	584


VOR RWY 19

CINCINNATI WEST (I67)


  DME or RADAR required. Use Butler Co Rgnl-Hogan Field altimeter setting, when not received, use Cincinnati/Northern Kentucky Intl altimeter setting and increase all MDA 40 feet, and S-19 Cat A visibility ¼ mile. Procedure NA at night. Rwy 1, 19 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000, then climbing right turn to 2600 via CVG VORTAC R-351 to NESRY/ CVG 20 DME/RADAR and hold.

AWOS-3PT	CINCINNATI APP CON	UNICOM
118.15	128.7 254.25	123.0 (CTAF) 

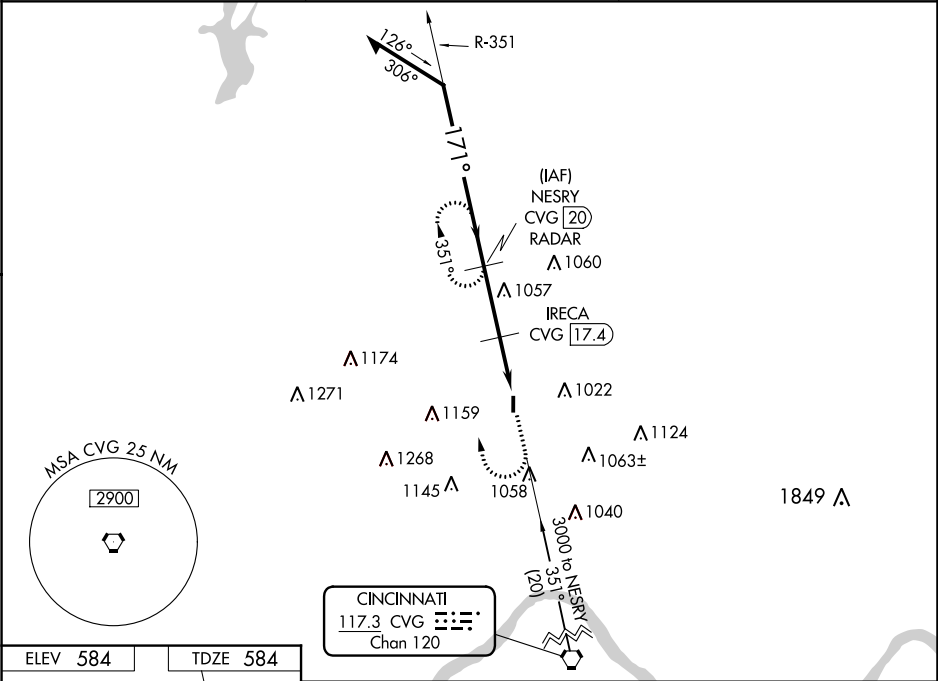

ELEV 584	TDZE 584
----------	----------



Remain within 10 NM		NESRY CVG 20 RADAR		2000 ↑	2600 ↗	CVG R-351	NESRY CVG 20 RADAR
2600		351°	171°	3.45° TCH 40	IRECA CVG 17.4	CVG 15.2	
		2400	1440	2.6 NM	2.3 NM		
CATEGORY	A	B	C	D			
S-19	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA				
CIRCLING	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA				
IRECA FIX MINIMUMS							
S-19	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA				
CIRCLING	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA				

MRL Rwy 1-19 					
FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

EC-2, 22 FEB 2024 to 21 MAR 2024

EC-2, 22 FEB 2024 to 21 MAR 2024