RNAV (GPS) RWY 19

CINCINNATI WEST (I67)

APP CRS	Rwy Idg	2589
185°	TDZE	584
	Apt Elev	584

DME/DME RNP-0.3 NA. Rwy 1, 19 helicopter visibility reduction below 1 SM NA. Use Butler Co Rgnl-Hogan Field altimeter setting, when not received, use Cincinnati/Northern Kentucky Intl altimeter setting and increase all MDA 40 feet. Procedure NA at night.

NA

MISSED APPROACH: Climbing right turn 3000 direct KIRKS and hold.

AWOS-3PT	CINCINNATI APP CON	UNICOM
118.15	128.7 254.25	123.0 (CTAF) L

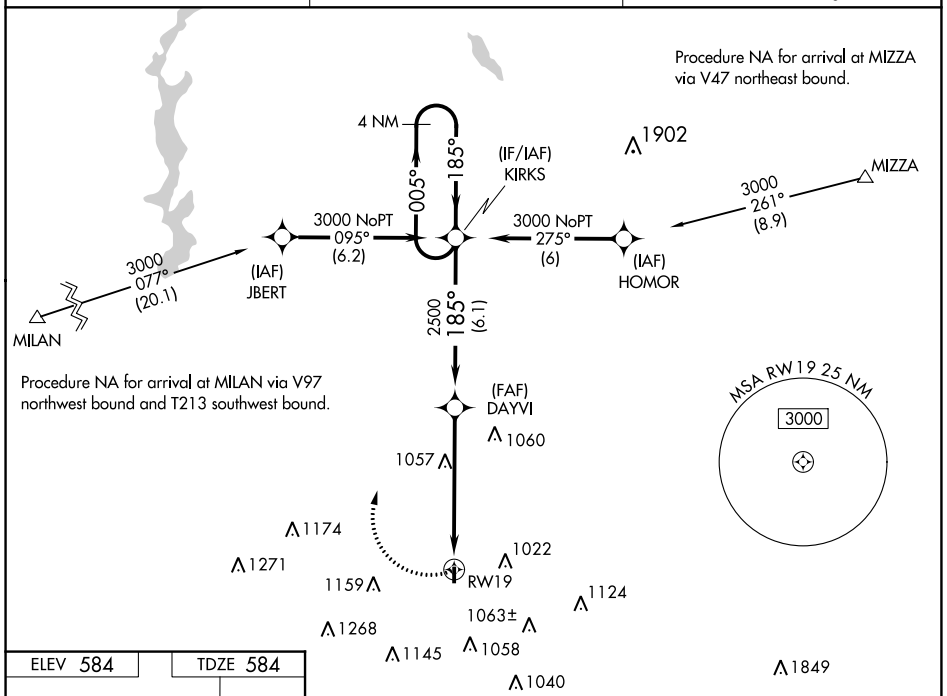

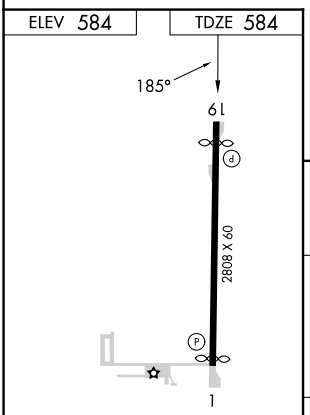

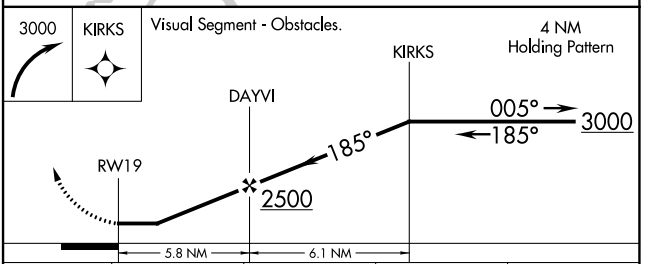

CATEGORY	A	B	C	D
LNAV MDA	1380-1 796 (800-1)	1380-1¼ 796 (800-1¼)	NA	
CIRCLING	1380-1 796 (800-1)	1380-1¼ 796 (800-1¼)	NA	

MIRL Rwy 1-19 L

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

VOR RWY 19

CINCINNATI WEST (I67)

VORTAC CVG	APP CRS	Rwy Idg	2589
117.3	171°	TDZE	584
Chan 120		Apt Elev	584

T NA — DME or RADAR required. Use Butler Co Rgnl-Hogan Field altimeter setting, when not received, use Cincinnati/Northern Kentucky Intl altimeter setting and increase all MDA 40 feet, and S-19 Cat A visibility ¼ mile. Procedure NA at night. Rwy 1, 19 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 2000, then climbing right turn to 2600 via CVG VORTAC R-351 to NESRY/ CVG 20 DME/RADAR and hold.

AWOS-3PT	CINCINNATI APP CON	UNICOM
118.15	128.7 254.25	123.0 (CTAF) L

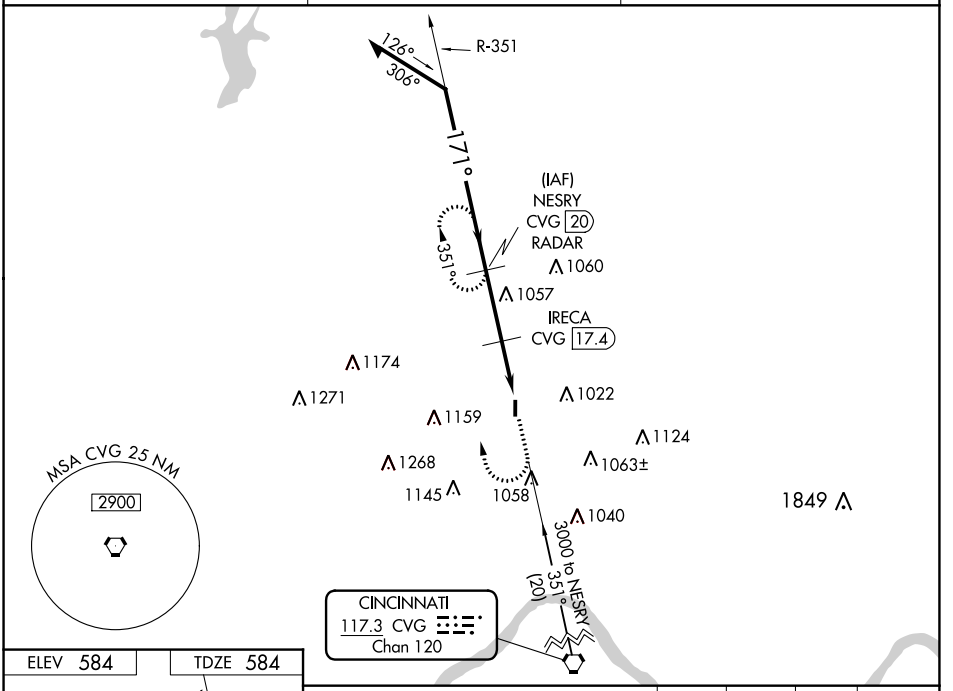

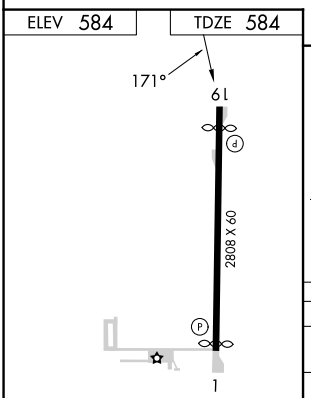

MIRL Rwy 1-19 L

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

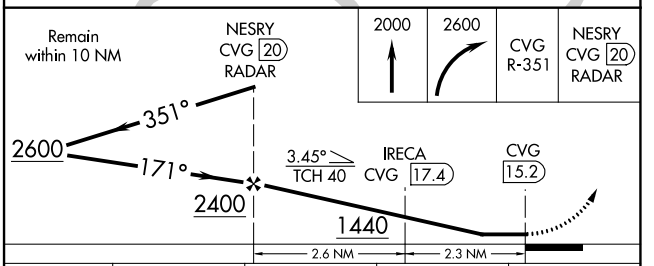

CATEGORY	A	B	C	D
S-19	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA	
CIRCLING	1440-1 856 (900-1)	1440-1¼ 856 (900-1¼)	NA	
IRECA FIX MINIMUMS				
S-19	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA	
CIRCLING	1340-1 756 (800-1)	1340-1¼ 756 (800-1¼)	NA	

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024