



APP CRS	Rwy Idg	3198
185°	TDZE	754
	Apt Elev	754

RNAV (GPS) RWY 18
GRATIOT COMMUNITY (A.MN)

RNP APCH.		MISSED APPROACH: Climbing right turn to 2800 direct OREYO WP and hold.	
▼ ▲ NA	Procedure NA at night.		
AWOS-3P 124.175	GREAT LAKES APP CON* 126.45 235.625	CLNC DEL 119.25	UNICOM 122.8 (CTAF) 0

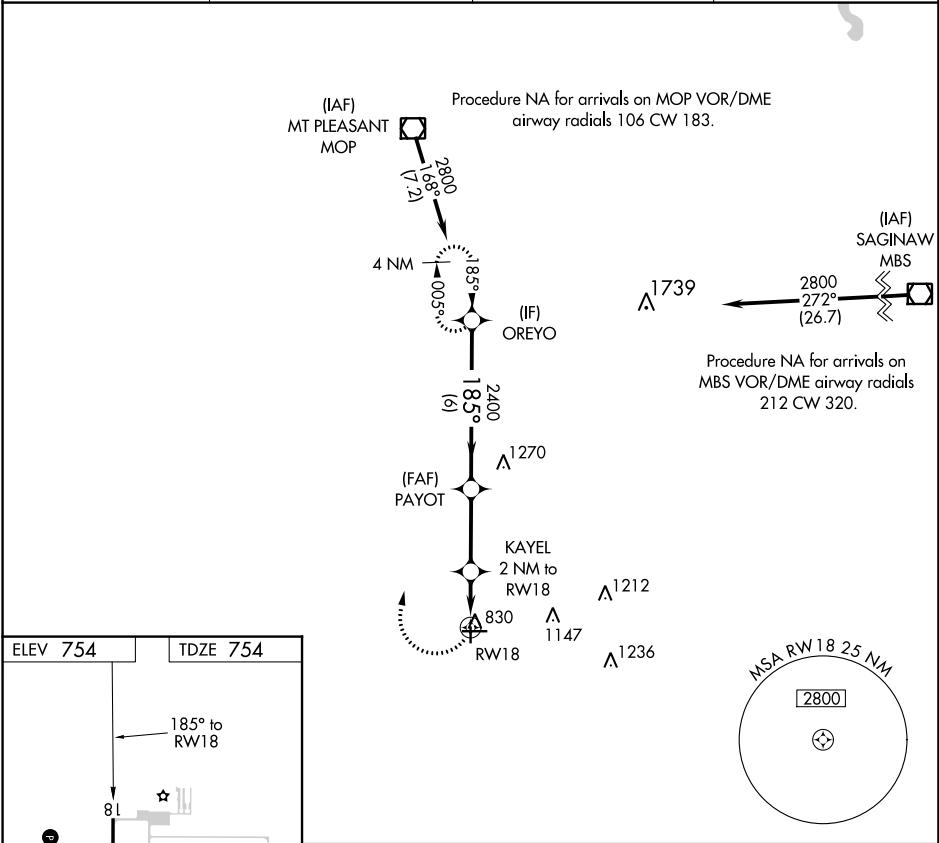

2800 OREYO		PAYOT		OREYO	
KAYEL 2 NM to RW18		1.1 NM to RW18		2400	
RW18		1440		TCH 45	
1.1		0.9		3 NM	
CATEGORY		A		B	
LNAV MDA		1160-1		406 (500-1)	
				1160-1 1/4	
				406 (500-1 1/4)	
				NA	


WAAS CH 58028 W27A	APP CRS 275°	Rwy Idg TDZE Apt Elev	5004 753 754
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 27
GRATIOT COMMUNITY (AMN)


RNP APCH.	MISSED APPROACH: Climb to 1900 then climbing right turn 2600 direct CEGEE and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	


AWOS-3P 124,175	GREAT LAKES APP CON ★ 126,45 235,625	CLNC DEL 119,25	UNICOM 122.8 (CTAF) 0
---------------------------	--	---------------------------	---------------------------------

Procedure NA for arrival on MBS
VOR/DME airway radials 238 CW 320.

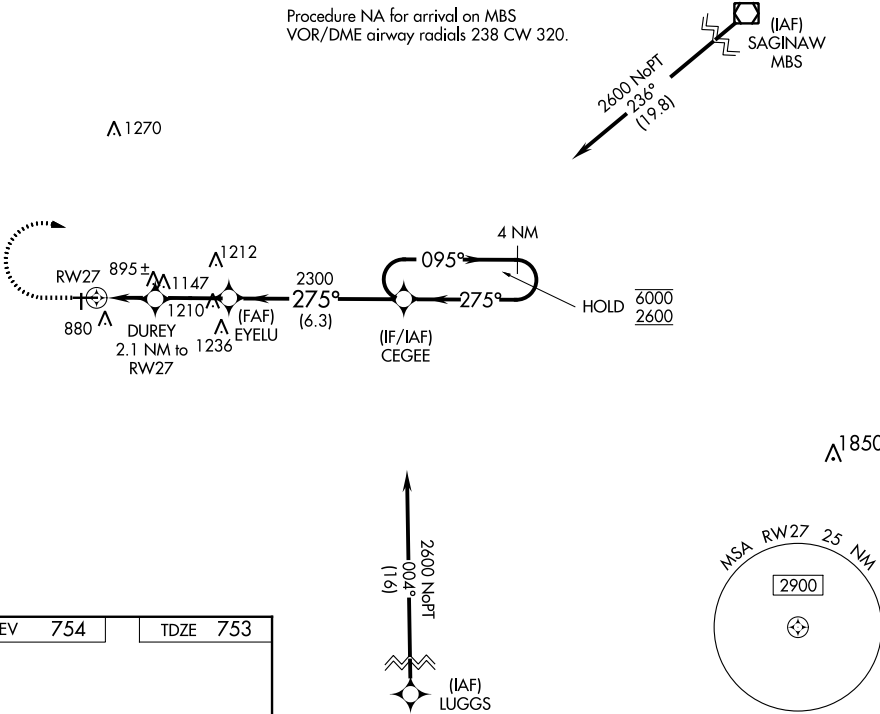

ELEV	754	TDZE	753
------	------------	------	------------

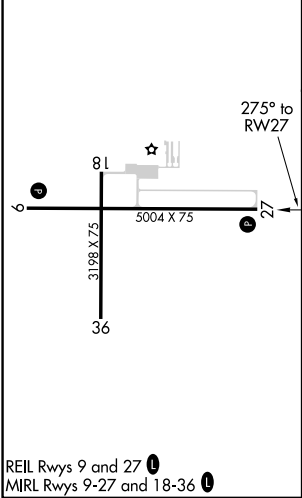

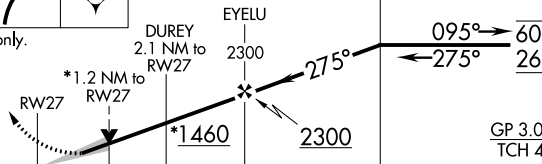1900	2600	CEGEE	4 NM Holding Pattern	
				
*LNAV only.				
				
CATEGORY	A	B	C	D
LPV DA	1003-1		250 (300-1)	
LNAV/VNAV DA	1036-1		283 (300-1)	
LNAV MDA	1160-1	407 (500-1)	1160-1½	407 (500-1½)

WAAS CH 90228 W09A	APP CRS 095°	Rwy Idg TDZE Apt Elev	5004 753 754
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9


GRATIOT COMMUNITY (AMN)

RNP APCH.

Baro-VNAV NA when using Mount Pleasant altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 39°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mount Pleasant altimeter setting and increase all DA 42 feet and VNAV all Cats visibility ⅓ mile, increase all MDA 60 feet, and LNAV Cat C and D visibility ¼ mile. VDP NA when using Mount Pleasant altimeter setting.

MISSED APPROACH: Climb to 2600 direct CEGEE and hold.

AWOS-3P 124.175	GREAT LAKES APP CON* 126.45 235.625	CLNC DEL 119.25	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------	--

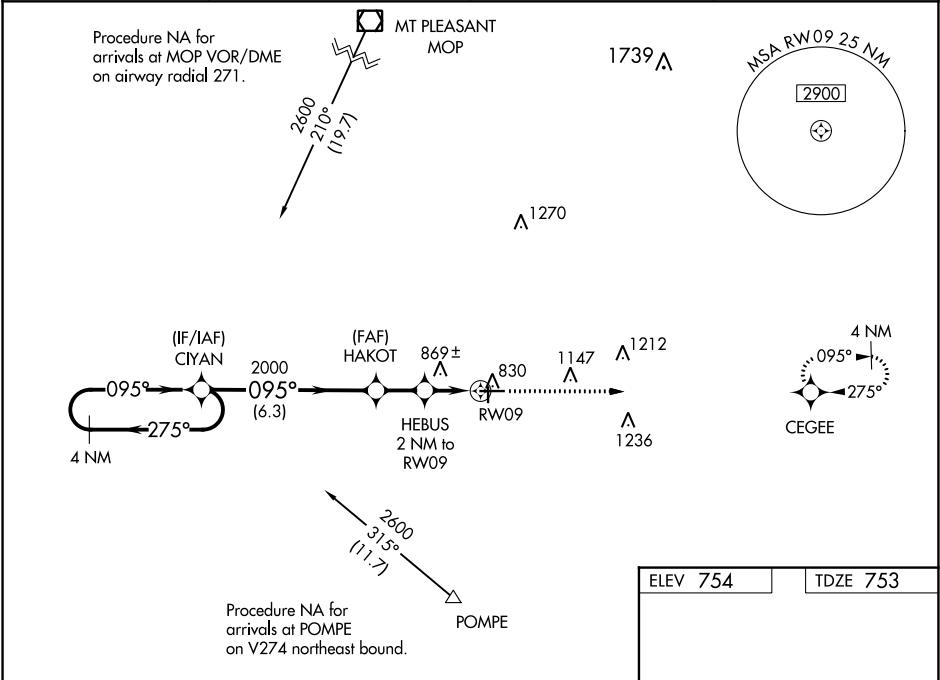

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

2600

CEGEE

095° to RW09

GP 3.00° TCH 55

CIYAN

HAKOT

HEBUS 2 NM to RW09

*1.2 NM to RW09

RW09

6.3 NM

1.8 NM

0.8 NM

1.2 NM

*LNAV only

81

5004 X 75

3188 X 75

36

27

CATEGORY	A	B	C	D
LPV DA	1028-1 275 (300-1)			
LNAV/VNAV DA	1156-1⅓ 403 (500-1⅓)			
LNAV MDA	1160-1 407 (500-1)		1160-1⅓ 407 (500-1⅓)	

REIL Rwy 9 and 27 **0**
MIRL Rwy 9-27 and 18-36 **0**

EC-1, 22 FEB 2024 to 21 MAR 2024

EC-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME MOP 110.6 Chan 43	APP CRS 178°	Rwy Idg 3198 TDZE 753 Apt Elev 754
---	------------------------	---

VOR RWY 18
GRATIOT COMMUNITY (AMN)

T
A NA Night landing: Rwy 18, 36 NA. DME required.
Straight-in Rwy 18 NA at night, Circling Rwy 18, 36 NA at night. Rwy 18 helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 1200 then climbing right turn to 2600 on MOP VOR/DME R-178 direct FILKO/MOP VOR/DME 7 DME and hold.

AWOS-3P 124.175	GREAT LAKES APP CON★ 126.45 235.625	CLNC DEL 119.25	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------	---------------------------------

