

LOC/DME I-ARA

108.9

Chan 26

APP CRS

348°

Rwy Idg

8002

TDZE

21

Apt Elev

24

ILS or LOC RWY 35

ACADIANA RGNL (ARA)

DME required for procedure entry. DME required for LOC only.

▼

⚠

Circling NA to Rwy's 17W and 35W. For inop ALS increase S-ILS 35 Cat E visibility to ¾ SM and S-LOC 35 Cats C/D/E visibility to 1 ½ SM.

MALSR

AS

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold.

ASOS	LAFAYETTE APP CON ★	ACADIANA TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM	0 ★
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7

3000 ft PLYI (2A-A)

LAFAYETTE 109.8 LFT Chan 35

Procedure NA for arrival on LFT VORTAC airway radials 092 CW 114.

LOCALIZER 108.9 I-ARA Chan 26

1049 A

LULEW LSU 27.7

116.5 LSU Chan 112

CLYNT LFT 18.8

UXYAP I-ARA 4

ISUCE I-ARA 6.7

IF/IAF PLYI I-ARA 14.7 LFT 24.4

HOLD 4500 2000

168° 348° 1700

1.68° 1 min

324 A

463 A

119±

139

511 A

283 A

533 A

221 A

604 A

297 A

131 A

294° 114°

221° 041°

116.5 LSU Chan 112

LULEW LSU 27.7

ALTERNATE MISSED APCH FIX

MSA LFT 25 NM

2900 2100

081 360

ELEV 24 TDZE 21

HIRL Rwy 17-35

Seaway Rwy 17W-35W

8002 x 200

35W

TWR 105

35

348°

800

2000

LFT R-114

CLYNT

ISUCE I-ARA 6.7

PLYI I-ARA 14.7

One Minute Holding Pattern

*LOC only.

I-ARA 1.6

I-ARA 2.6

UXYAP I-ARA 4

1700

348°

168°

4500

2000

480*

1700

GS 3.00° TCH 51

1 NM

1.4 NM

2.7 NM

8 NM

CATEGORY	A	B	C	D	E
S-ILS 35	221-½ 200 (200-½)				
S-LOC 35	440-½ 419 (500-½) 440-¾ 419 (500-¾)				
CIRCLING	440-1 416 (500-1)	480-1 456 (500-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)	900-3 876 (900-3)

NEW IBERIA, LOUISIANA

Amtd 2A 11AUG22

30°02'N-91°53'W

ACADIANA RGNL (ARA)

ILS or LOC RWY 35

SC-4, 22 FEB 2024 to 21 MAR 2024




SC-4, 22 FEB 2024 to 21 MAR 2024

WAAS CH 82501 W17A	APP CRS 168°	Rwy Idg TDZE 24 Apt Elev 24
--	------------------------	---

RNAV (GPS) RWY 17

ACADIANA RGNL (ARA)

RNP APCH. ▼ Circling NA to Rwy 17W and 35W. Inop table does not apply to LPV. For inop ALS, increase LNAV/VNAV all Cats visibility to 1¼ SM and LNAV Cats C/D visibility to 1 SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C.				ODALS 		MISSED APPROACH: Climb to 480 then climbing left turn to 2000 direct CLYNT and hold.	
ASOS 133.325	LAFAYETTE APP CON ★ 121.1 268.7	ACADIANA TOWER ★ 125.0 (CTAF) 0 239.3	GND CON 121.7	CLNC DEL 121.7	CLNC DEL 118.05 (when twr closed)	UNICOM 122.95	0 ★ 122.7

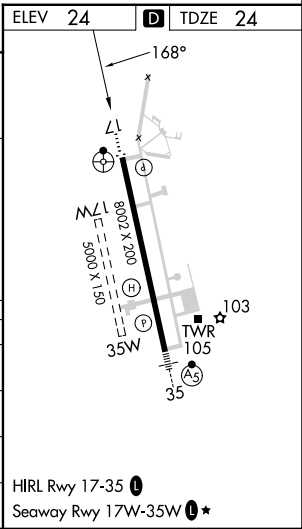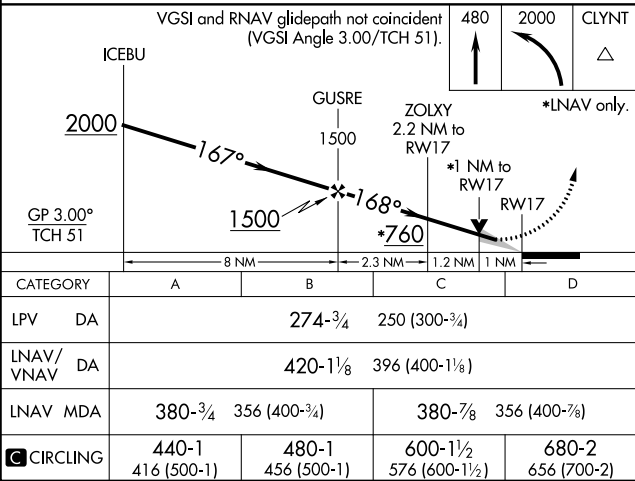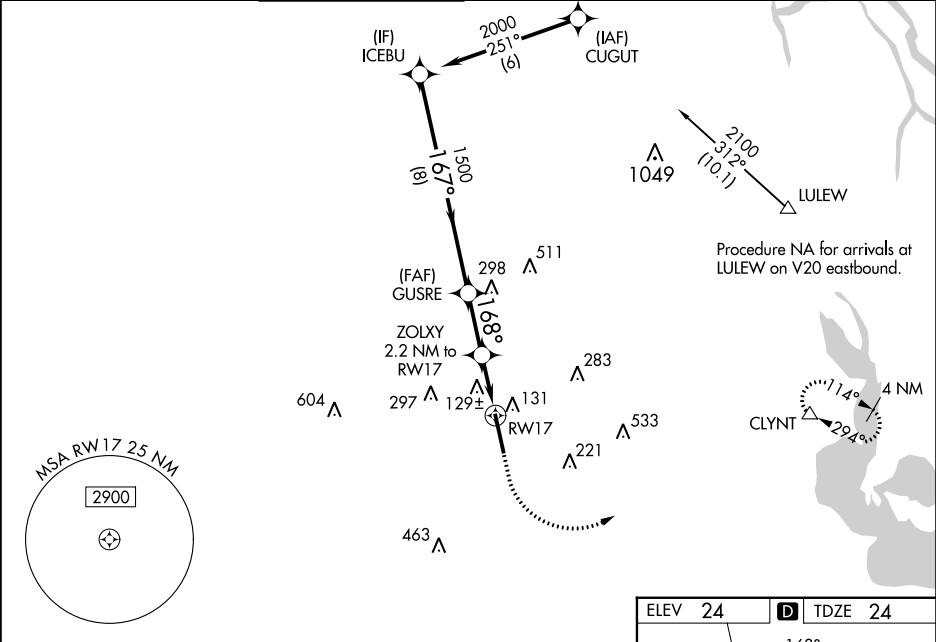

WAAS
CH **40301**
W35A


APP CRS
348°

Rwy Idg
TDZE **21**
Apt Elev **24**


RNAV (GPS) RWY 35

ACADIANA RGNL (A.R.A.)

RNP APCH.				MALSR	MISSED APPROACH: Climb to 440 then climbing right turn to 2000 direct LULEW and hold.		
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ½ SM and LNAV Cats C/D visibility to 1 SM. Circling NA to Rwys 17W and 35W.							
ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM	★
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7

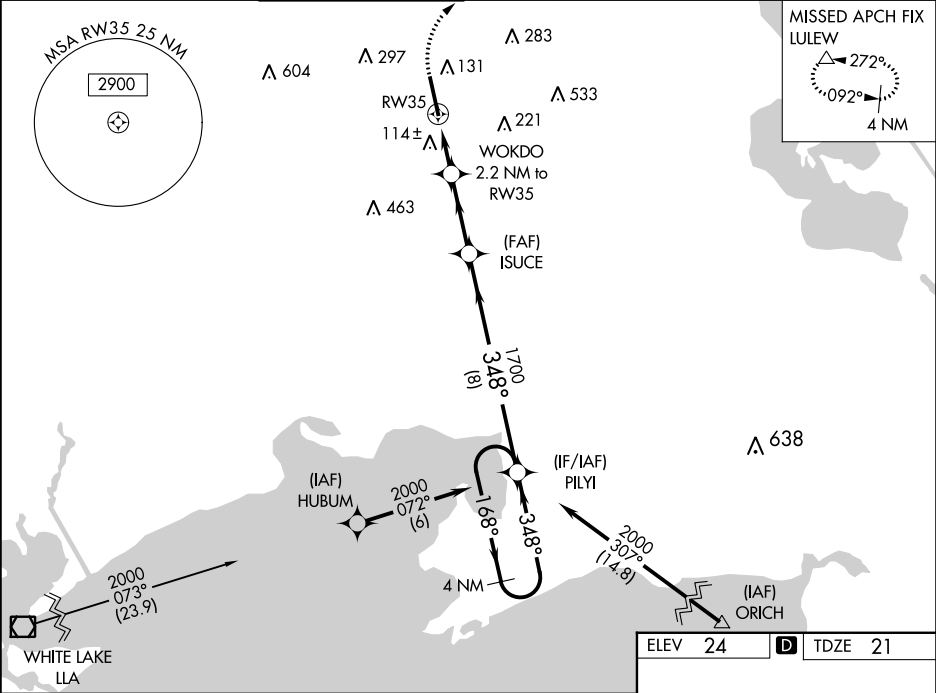

440	2000	LULEW	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).		4 NM
*LNAV only.		ISUCE	PILIY		Holding Pattern
WOKDO 2.2 NM to RW35		1700	168° → 2000		
RW35		348°	← 348°		GP 3.00° TCH 52
1 NM		1.2 NM	2.9 NM		8 NM
CATEGORY	A	B	C	D	
LPV DA	221-½		200 (200-½)		
LNAV/DA	303-½		282 (300-½)		
LNAV MDA	380-½		380-¾ 359 (400-½)		
CIRCLING	440-1 416 (500-1)		480-1 576 (600-½)		
		600-1½ 656 (700-2)		680-2	

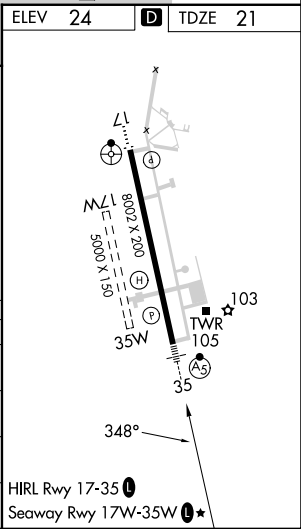

VORTAC LFT	APP CRS	Rwy Idg	8002
109.8	328°	TDZE	21
Chan 35		Apt Elev	24

VOR RWY 35

ACADIANA RGNL (A.R.A.)

⚠

⚠

Circling NA to Rwy's 17W and 35W.
DME required.
Inop table does not apply.


MALSR

AS

MISSED APPROACH: Climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold.

ASOS	LAFAYETTE APP CON *	ACADIANA TOWER *	GND CON	CLNC DEL	CLNC DEL	UNICOM	0 *
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)	122.95	122.7

DME REQUIRED

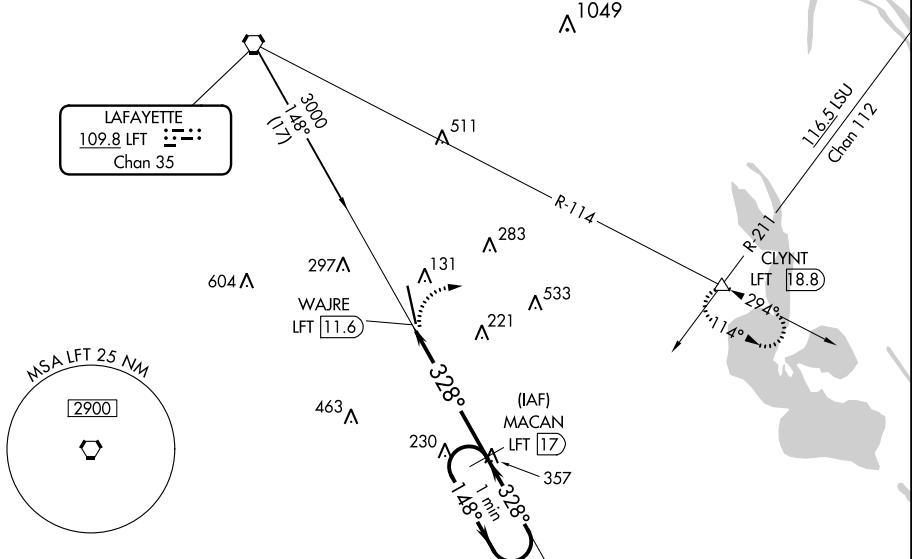

ELEV 24

D

TDZE 21

HIRL Rwy 16-34

Seaway Rwy 16W-34W

2000

hdg 080°

LFT R-114

CLYNT

MACAN LFT 17

One Minute Holding Pattern

WJARE LFT 11.6

LFT 13

328°

148°

1800

1.5




4 NM

CATEGORY	A	B	C	D	E
S-35	540-1½	519 (600-½)	540-1⅔	519 (600-1⅔)	
CIRCLING	540-1	516 (600-1)	600-1½ 576 (600-1½)	680-2 656 (700-2)	900-3 876 (900-3)

VORTAC LFT	APP CRS	Rwy Idg	8002
109.8	145°	TDZE	24
Chan 35		Apt Elev	24

VOR or TACAN RWY 17
ACADIANA RGNL (A.R.A.)

▼ Circling NA to Rwy 17W and 35W. ▲ DME or RADAR required. For inop ALS, increase S-17 Cat E visibility to 1½ mile.		ODALS 	MISSED APPROACH: Climbing left turn to 2000 on heading 060° and LFT VORTAC R-114 to CLYNT INT/18.8 DME and hold.		
ASOS	LAFAYETTE APP CON★	ACADIANA TOWER★	GND CON	CLNC DEL	CLNC DEL
133.325	121.1 268.7	125.0 (CTAF) 0 239.3	121.7	121.7	118.05 (when twr closed)
					UNICOM
					122.95
					0★
					122.7

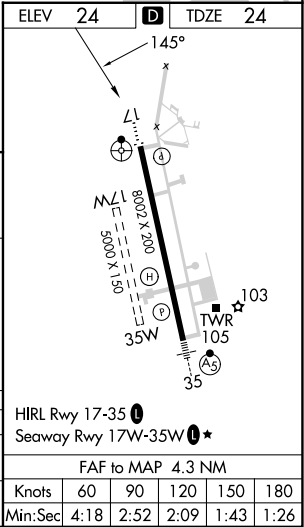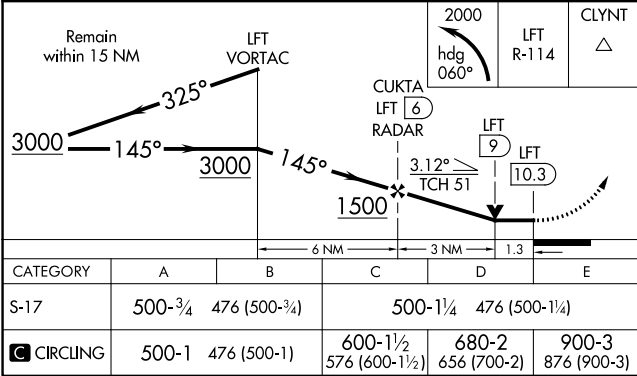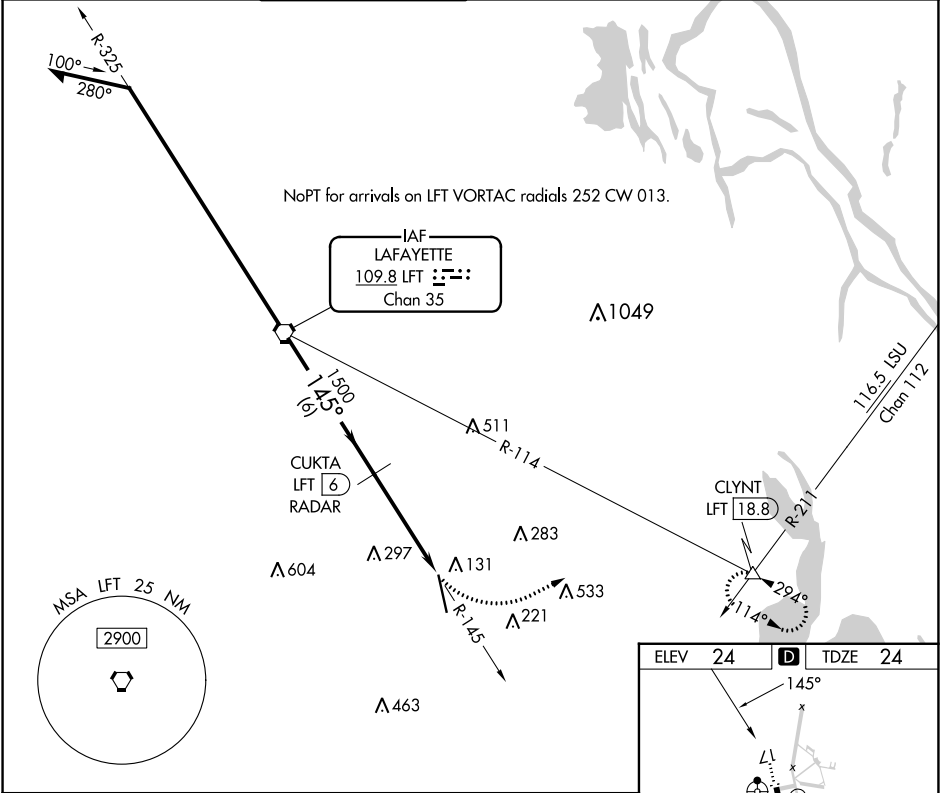

VOR or TACAN RWY 17

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024