


WAAS CH 40237 W14A	APP CRS 141°	Rwy Idg TDZE 1117 Apt Elev 1122	3851
--	------------------------	---	-------------

RNAV (GPS) RWY 14
WEBSTER CITY MUNI (EBS)


⚠ Baro-VNAV NA when using Clarion altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clarion altimeter setting and increase all DAs 49 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility 1/8 mile. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct OLTOE and hold.

AWOS-3 127.825	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

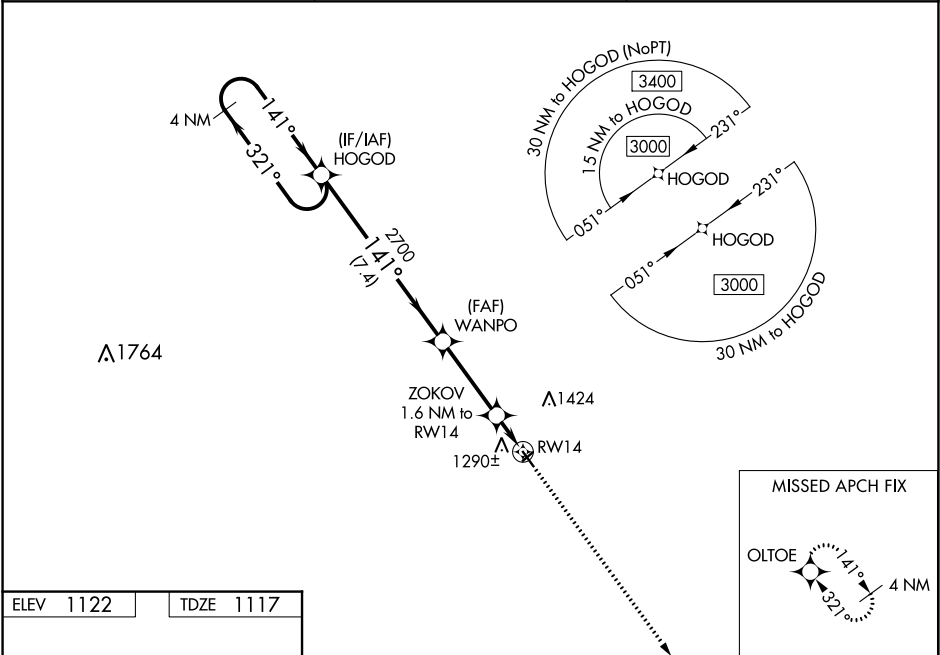

ELEV 1122	TDZE 1117
------------------	------------------

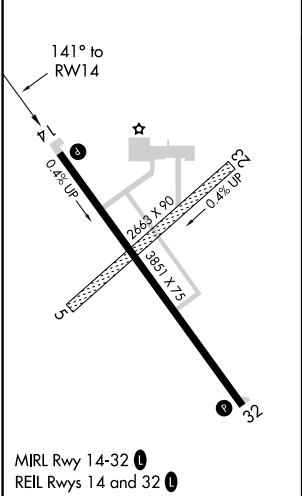

VGSi and RNAV glidepath not coincident (VGSi Angle 3.25/TCH 25).				3000	OLTOE
4 NM Holding Pattern HOGOD				↑	✦
3000 ← 321° 141° →				*LNNAV only	
GP 3.00° TCH 40				↑	
7.4 NM				✦	
3.3 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM				↑	
1.6 NM				✦	
1.6 NM					

WAAS CH 90516 W32A	APP CRS 321°	Rwy Idg 3851 TDZE 1122 Apt Elev 1122
--	------------------------	---

RNAV (GPS) RWY 32


WEBSTER CITY MUNI (EBS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Clarion altimeter setting and increase all DA 49 feet and all MDA 60 feet. Baro-VNAV and VDP NA when using Clarion altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH: Climb to 3000 direct HOGOD and hold.


AWOS-3 127.825	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

MISSED APCH FIX



1721 Å

ELEV 1122		TDZE 1122
-----------	--	-----------

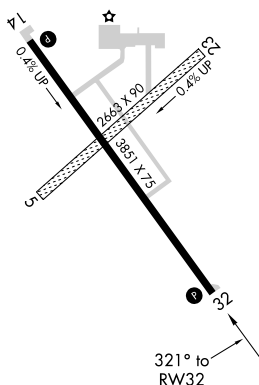MIRL Rwy 14-32 **L**

REIL Rwy 14 and 32 L

WEBSTER CITY, IOWA

Amdt 2 05MAR15

3000
↑
HOGOD

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 30).

4 NM
Holding Pattern

OLTOE

DOVVA
1.5 NM to
RW32

BLDSDO
2700

141° → 3000
← 321°

*1 NM to RW32

RW32

1620*

321°

2700

GP 3.00°
TCH 40

1 NM 0.5 NM 3.3 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	1372-1	250 (300-1)	NA	
RNAV/VNAV DA	1372-1	250 (300-1)	NA	
RNAV MDA	1460-1	338 (400-1)	NA	
C CIRCLING	1600-1	478 (500-1)	NA	

WEBSTER CITY, IOWA

Amdt 2 05MAR15

42°26'N-93°52'W

WEBSTER CITY MUNI (EBS)
RNAV (GPS) RWY 32