

WAAS CH 72614 W05A	APP CRS 055°	Rwy Idg 5080 TDZE 360 Apt Elev 361
--	------------------------	---

RNAV (GPS) RWY 5


ENTERPRISE MUNI (EDN)

T

A NA

Baro-VNAV NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Use Cairns AAF (Fort Novosel) altimeter setting.

MISSED APPROACH: Climb to 2500 direct CEYLU and left turn via track 295° to HAXES and left turn via track 191° to ROTOY and hold.

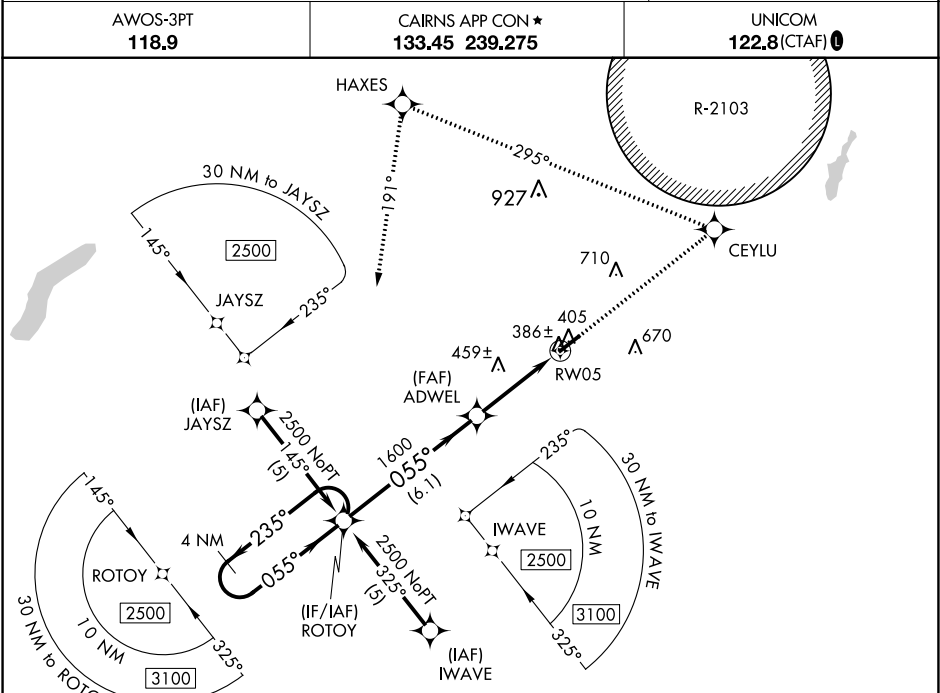

4 NM Holding Pattern

ROTOY

2500

CEYLU

HAXES

ROTOY

2500

GP 3.00° TCH 40

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

ADWEL

1600

RW05

6.1 NM

3.8 NM

CATEGORY	A	B	C	D
LPV DA	642-1	282 (300-1)		NA
LNAV/VNAV DA	688-1¼	328 (400-1¼)		NA
LNAV MDA	760-1	400 (400-1)		NA
CIRCLING	920-1	559 (600-1)	1100-2 739 (800-2)	NA

ELEV 361

TDZE 360



REIL Rwys 5 and 23

MIRL Rwy 5-23

VOR EDN 116.6	APP CRS 065°	Rwy Idg TDZE Apt Elev	5080 360 361
-------------------------	------------------------	-----------------------------	---

VOR RWY 5
ENTERPRISE MUNI(EDN)

ADF or RADAR required. Use Cairns AAF (Fort Novosel) altimeter setting.		MISSED APPROACH: Climbing left turn to 2500 in EDN VOR holding pattern.
AWOS-3PT 118.9	CAIRNS APP CON ★ 133.45 239.275	UNICOM 122.8 (CTAF) 0

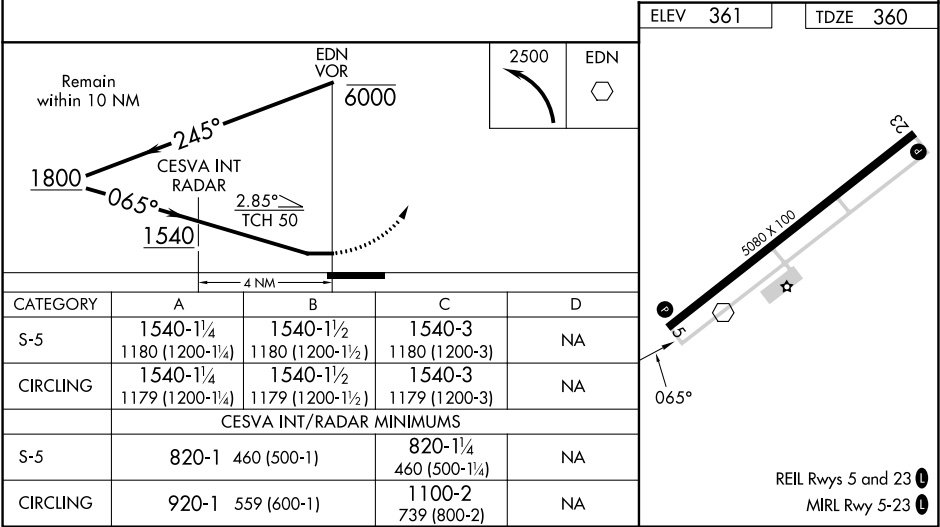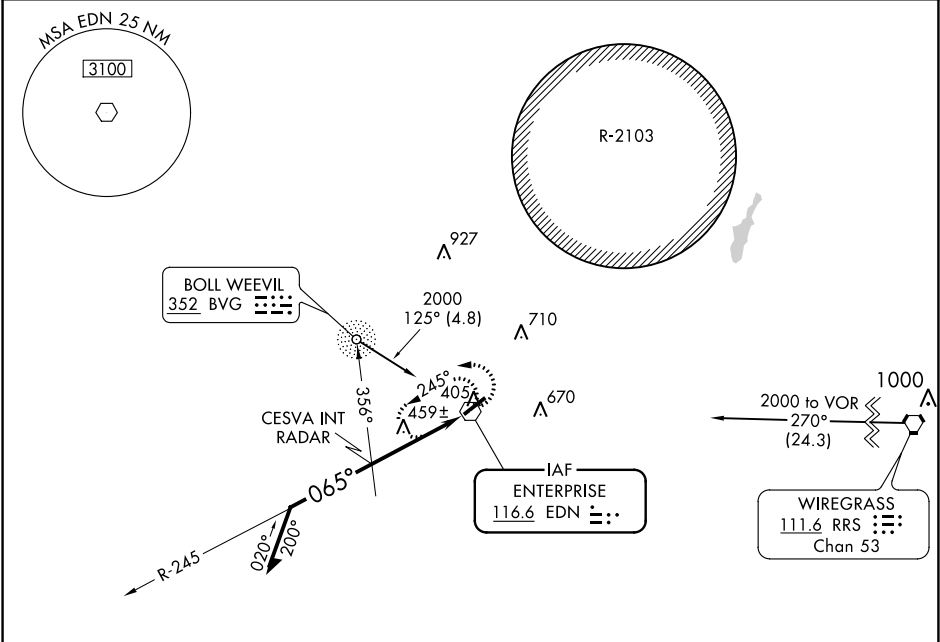

SE-4, 22 FEB 2024 to 21 MAR 2024

SE-4, 22 FEB 2024 to 21 MAR 2024