

WAAS CH 50333 W01A	APP CRS 013°	Rwy Idg 3200 TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 1

KEWANEE MUNI (EZI)


▼

▲ NA

Baro-VNAV NA. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¼ SM NA. Use Galesburg altimeter setting; when not received, use Moline altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV all Cats visibility ⅓ mile, and Circling Cat C visibility ¼ mile.


MISSED APPROACH:
Climb to 2400 direct YABYU and hold.

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

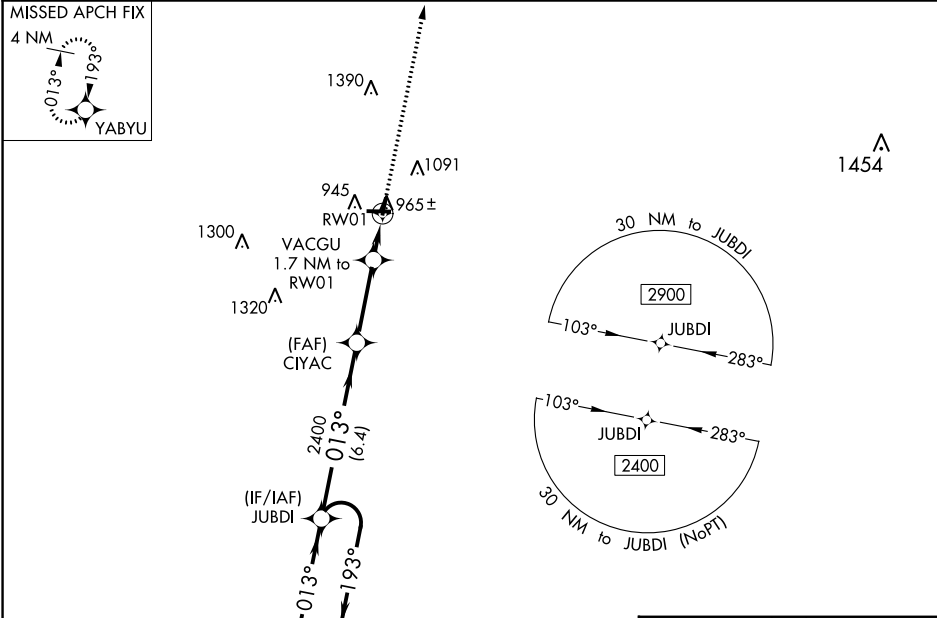

ELEV 858	TDZE 857
MIRL Rwy 1-19 and 9-27 0	

4 NM Holding Pattern		JUBDI	CIYAC	VACGU 1.7 NM to RW01	*1420	RW01
2400 ← 193°		013° →	2400	2400		
GP 3.00°		TCH 40				
6.4 NM		3 NM	1.7 NM			
CATEGORY	A	B	C	D		
LPV DA	1182-1⅓	325 (400-1⅓)		NA		
LPV DA	1212-1¼	355 (400-1¼)		NA		
LPV MDA	1300-1	443 (500-1)	1300-1⅓	443 (500-1⅓)	NA	
CIRCLING	1340-1	1520-1	1520-1⅓	662 (700-1⅓)	NA	

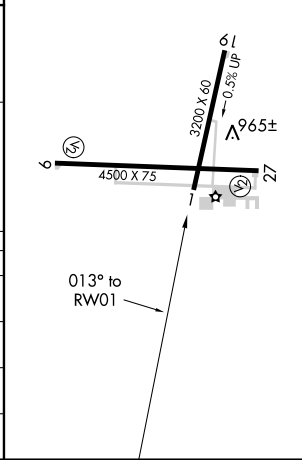


WAAS CH 97533 W19A	APP CRS 193°	Rwy Idg TDZE 857 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 19


KEWANEE MUNI (EZI)

RNP APCH - GPS.	Baro-VNAV NA. Use Galesburg altimeter setting. When local altimeter setting not received, use Moline altimeter setting and increase LPV DA to 1212 feet; increase LNAV/VNAV DA to 1446 feet and all visibilities 1/8 SM. Increase all MDAs 40 feet and LNAV visibility Cat C 1/8 SM, and Circling visibility Cat C 1/4.	MISSED APPROACH: Climb to 2400 direct JUBDI and hold.
-----------------	---	--

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

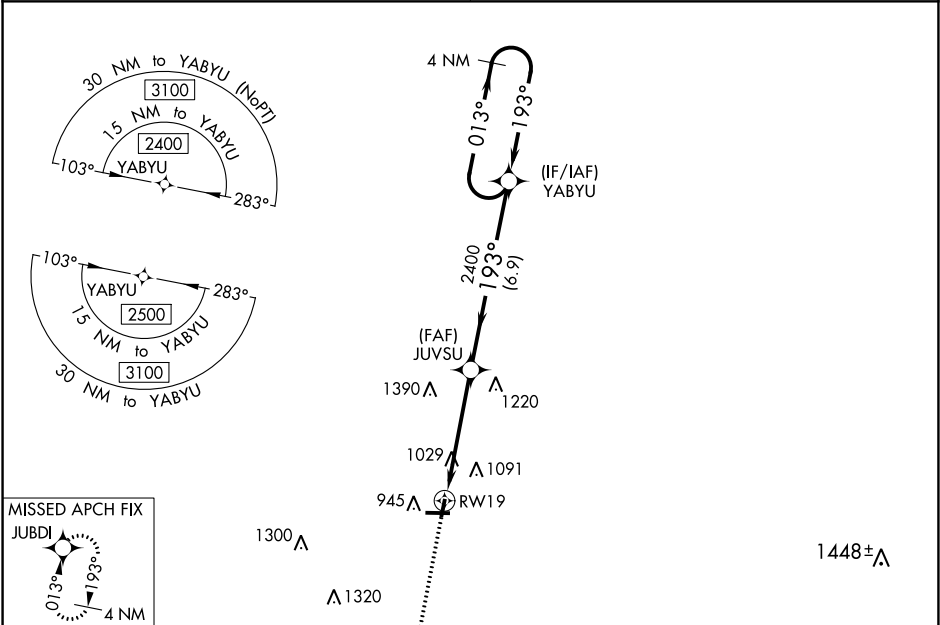

ELEV 858	TDZE 857
-----------------	-----------------

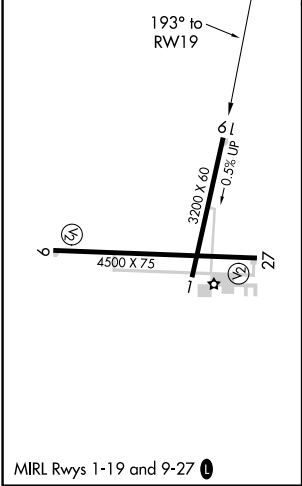

2400

↑

JUBDI

✦

4 NM Holding Pattern

JUVSU

2400

YABYU

2400

RW19

↻

193°

013°

193°

2400

GP 3.00°

TCH 40

4.8 NM

6.9 NM

CATEGORY	A	B	C	D
LPV DA	1182-1 325 (400-1)			NA
LNAV/VNAV DA	1416-1 ⁵ / ₈ 559 (600-1 ⁵ / ₈)			NA
LNAV MDA	1400-1	543 (600-1)	1400-1 ⁵ / ₈ 543 (600-1 ⁵ / ₈)	NA
CIRCLING	1400-1 542 (600-1)	1520-1 662 (700-1)	1520-1 ³ / ₄ 662 (700-1 ³ / ₄)	NA

WAAS CH 72833 W09A	APP CRS 093°	Rwy Idg TDZE 856 Apt Elev 858
--	------------------------	---

RNAV (GPS) RWY 9




KEWANEE MUNI (EZI)

RNP APCH.


▼ Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA. Use Galesburg altimeter setting, when not received, use Moline altimeter setting and increase all DA to 1210 feet and all visibilities ½ SM; increase all MDA 40 feet, and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 2500 direct YAVUN and hold.

QUAD CITY APP CON ★ 133.275 257.8	UNICOM 122.8 (CTAF) 0
---	---------------------------------

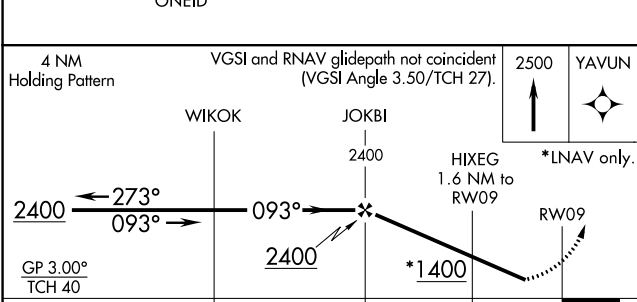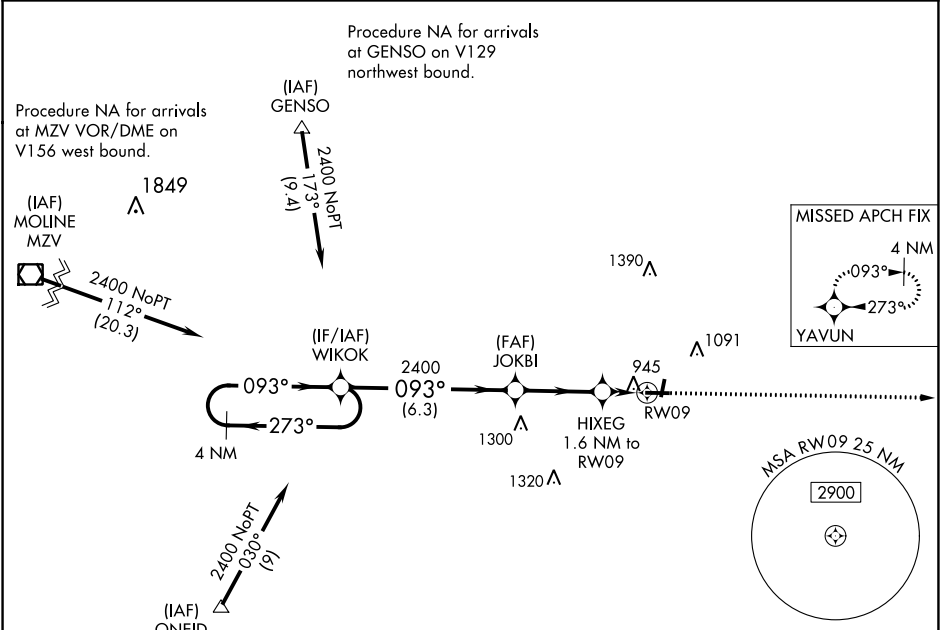

CATEGORY	A	B	C	D
LPV DA	1181-1⅛	325 (400-1⅛)		NA
LNAV/VNAV DA	1181-1⅛	325 (400-1⅛)		NA
LNAV MDA	1300-1	444 (500-1)	1300-1⅛ 444 (500-1⅛)	NA
CIRCLING	1340-1 482 (500-1)	1520-1 662 (700-1)	1520-1⅜ 662 (700-1⅜)	NA



EC-3, 22 FEB 2024 to 21 MAR 2024

EC-3, 22 FEB 2024 to 21 MAR 2024