



WAAS CH 40423 W12A	APP CRS 126°	Rwy Idg TDZE Apt Elev	5704 2458 2458
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12


DAWSON COMMUNITY (GDV)

RNP APCH.	MISSED APPROACH: Climb to 6000 direct ZORAS and on track 060° to YAFLU and hold, continue climb-in-hold to 6000.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 12 helicopter visibility reduction below ¾ SM NA.	

AWOS-3PT 135.075	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

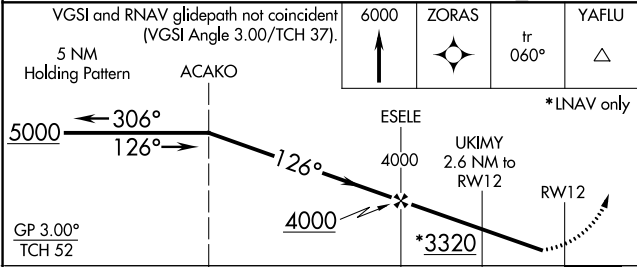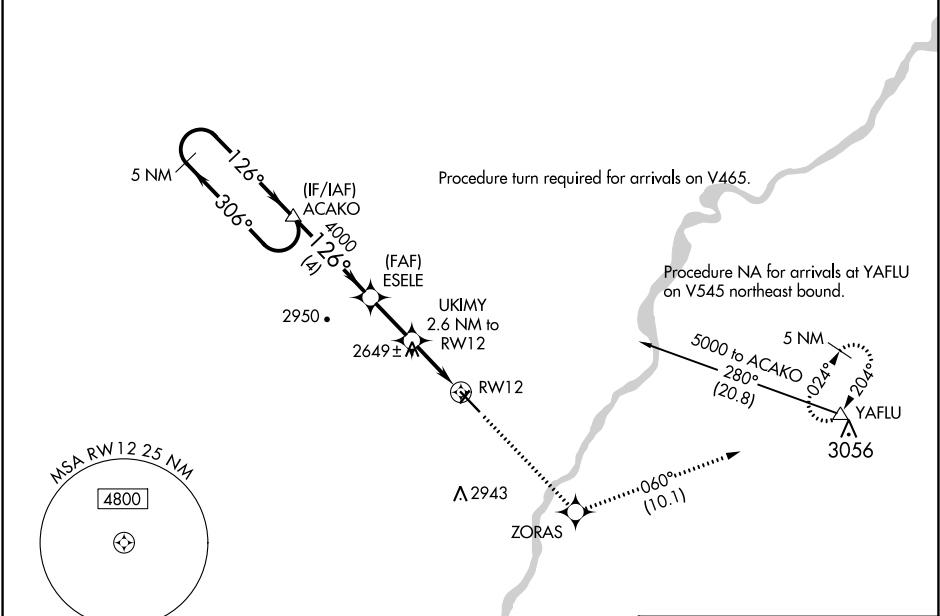

CATEGORY	A	B	C	D
LPV DA	2708-1	250 (300-1)		
LNAV/VNAV DA	2708-1	250 (300-1)		
LNAV MDA	2900-1	442 (500-1)	2900-1 3/8	442 (500-1 3/8)
CIRCLING	2900-1 442 (500-1)	2920-1 462 (500-1)	3280-2 1/2 822 (900-2 1/2)	3280-2 3/4 822 (900-2 3/4)

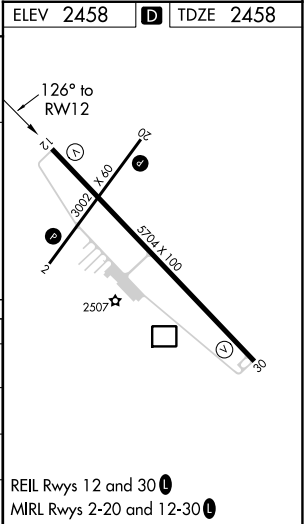


WAAS CH 86623 W30A	APP CRS 306°	Rwy Idg TDZE 2456 Apt Elev 2458
--	------------------------	---

RNAV (GPS) RWY 30

DAWSON COMMUNITY (GDV)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 28°C. When local altimeter setting not received, procedure NA. Rwy 30 helicopter visibility reduction below ¾ SM NA. ▲	MISSED APPROACH: Climb to 6000 direct ACAKO and hold, continue climb-in-hold to 6000.
---	---

AWOS-3PT 135.075	SALT LAKE CENTER 126.85 305.2	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

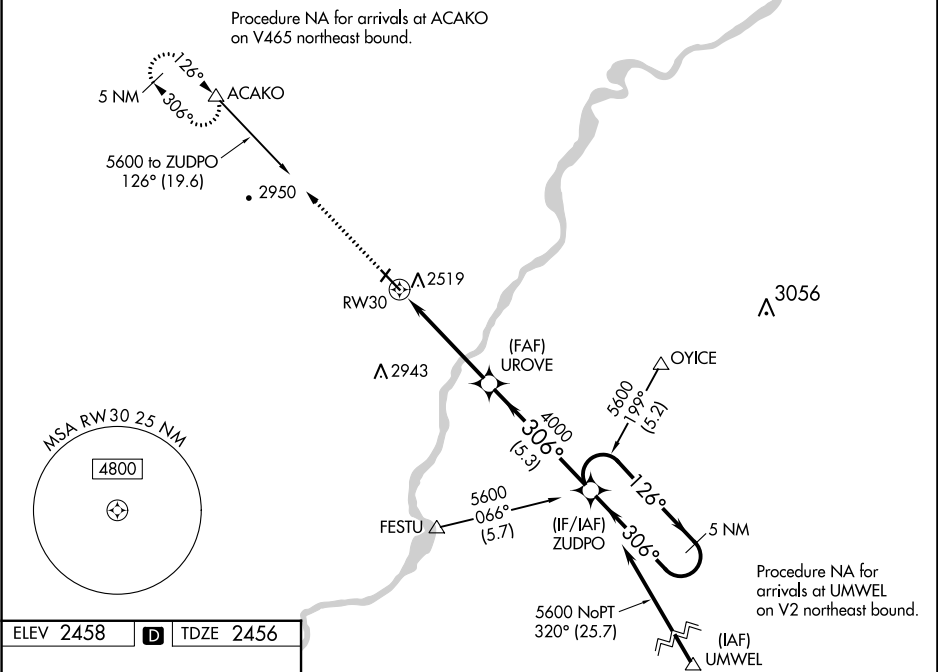

REIL Rwy 12 and 30 1 MRL Rwy 2-20 and 12-30 1	6000 ↑ ACAKO △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37).				5 NM Holding Pattern
	UROVE 4000	ZUDPO				126° 5600 ← 306°
	RW30	4000				GP 3.00° TCH 52
	4.7 NM	5.3 NM				
	CATEGORY	A	B	C	D	
LPV	DA	2706-1 250 (300-1)				
LNAV/VNAV	DA	2706-1 250 (300-1)				
LNAV MDA		2780-1 324 (400-1)				
CIRCLING		2840-1 382 (400-1)	2920-1 462 (500-1)	3280-2½ 822 (900-2½)	3280-2¾ 822 (900-2¾)	