WAAS CH **86502** **W11A**	APP CRS **107°**	Rwy Idg **4001** TDZE **145** Apt Elev **146**

RNAV (GPS) RWY 11

WINTER HAVEN RGNL (GIF)

RNP APCH-GPS.

Rwy 11 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Bartow altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 3°C or above 54°C. When local altimeter setting not received, use Bartow altimeter setting and increase LPV DA to 415 feet; increase LNAV/VNAV DA to 667 feet and all visibilities ⅛ SM; increase all MDAs 20 feet. Straight-in Rwy 11 NA at night, Circling Rwy 5, 11, 29 NA at night.

MISSED APPROACH: Climb to 2600 direct RAVYO and hold.

ASOS	TAMPA APP CON	CLNC DEL (GCO)	UNICOM
133.675	**120.65 290.3**	**121.725**	**123.05** (CTAF) L

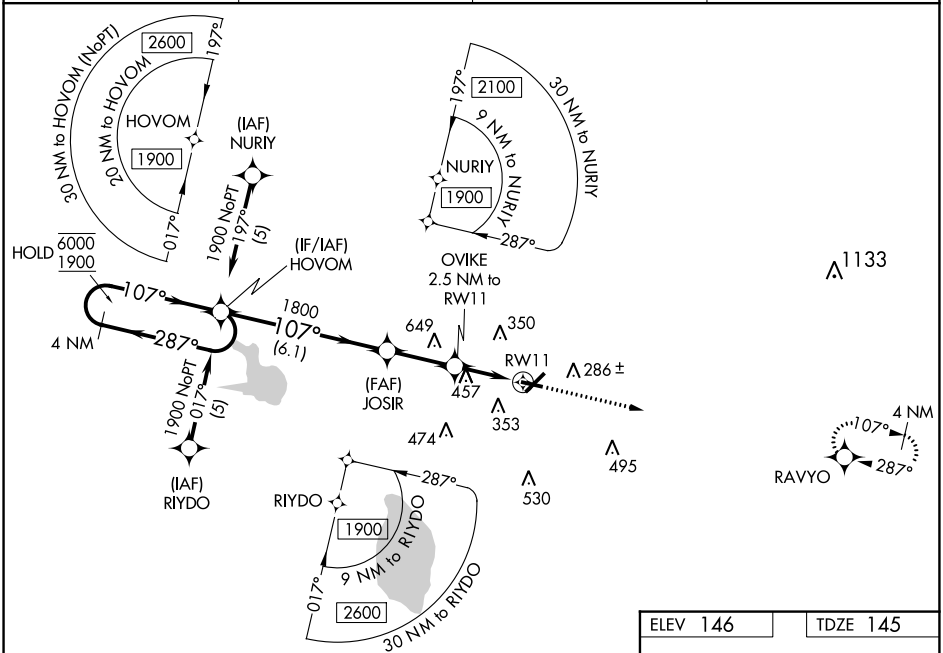

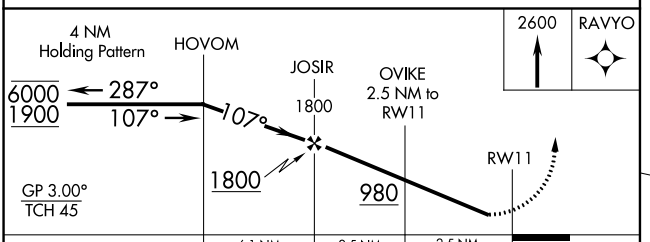

CATEGORY	A	B	C	D
LPV DA	395-1 250 (300-1)			
LNAV/ VNAV DA	647-1⅜ 502 (600-1⅜)			
LNAV MDA	760-1 615 (700-1)		760-1¾ 615 (700-1¾)	
CIRCLING	760-1 614 (700-1)		820-2 674 (700-2)	960-2¾ 814 (900-2¾)

ELEV 146 TDZE 145



REIL Rwys 5 and 23
REIL Rwys 11 and 29 L
MIRL Rwy 5-23 and 11-29 L

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024

APP CRS	Rwy Idg	5005
049°	TDZE	146
	Apt Elev	146

RNAV (GPS) RWY 5
WINTER HAVEN RGNL (GIF)

RNP APCH-GPS.

Rwy 5 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Bartow altimeter setting and increase all MDAs 20 feet and visibility LNAV Cats C and D ⅛ SM. Straight-in Rwy 5 NA at night, Circling Rwy 5, 11, 29 NA at night.

MISSED APPROACH: Climbing left turn to 2000 direct PLUMY and hold.

ASOS	TAMPA APP CON	CLNC DEL (GCO)	UNICOM
133.675	120.65 290.3	121.725	123.05 (CTAF) L

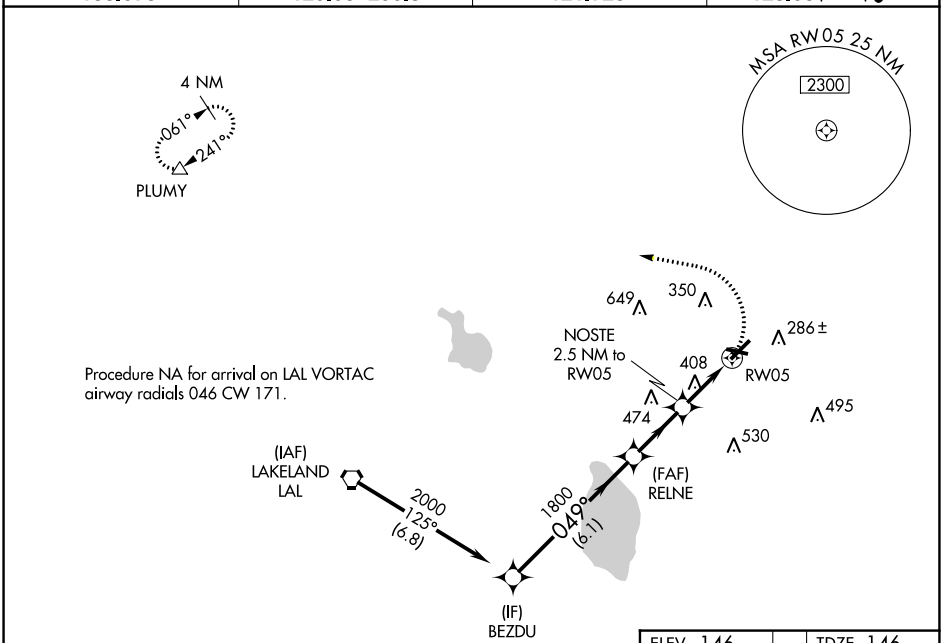

ELEV 146	TDZE 146

1549

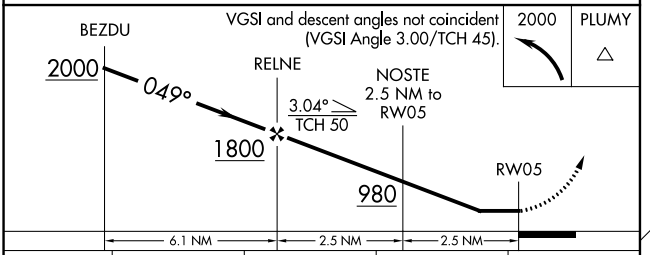



CATEGORY	A	B	C	D
LNAV MDA	660-1 514 (600-1)		660-1⅜ 514 (600-1⅜)	
CIRCLING	720-1 574 (600-1)		820-2 674 (700-2)	960-2¾ 814 (900-2¾)

REIL Rwys 5 and 23
REIL Rwys 11 and 29 L
MIRL Rwy 5-23 and 11-29 L

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024

VORTAC LAL	APP CRS	Rwy Idg	N/A
116.0	071°	TDZE	N/A
Chan 107		Apt Elev	146

VOR-A

WINTER HAVEN RGNL (GIF)

DME required.

Circling Rwy 5, 11, 29 NA at night. When local altimeter setting not received, use Bartow altimeter setting and increase all MDAs 20 feet.

MISSED APPROACH: Climbing left turn to 2000 direct LAL VORTAC and hold.

ASOS	TAMPA APP CON	CLNC DEL (GCO)	UNICOM
133.675	120.65 290.3	121.725	123.05 (CTAF) L

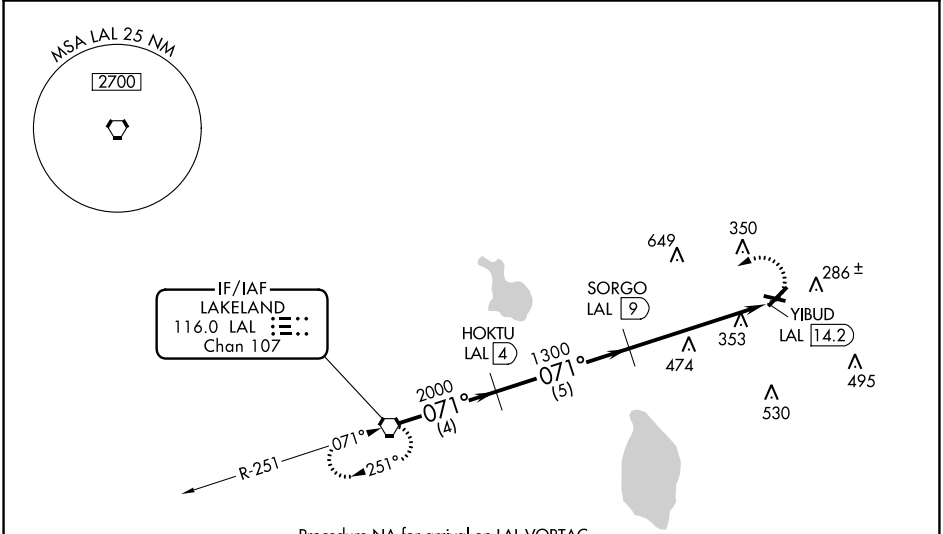

Procedure NA for arrival on LAL VORTAC airway radials 046 CW 080.

1667

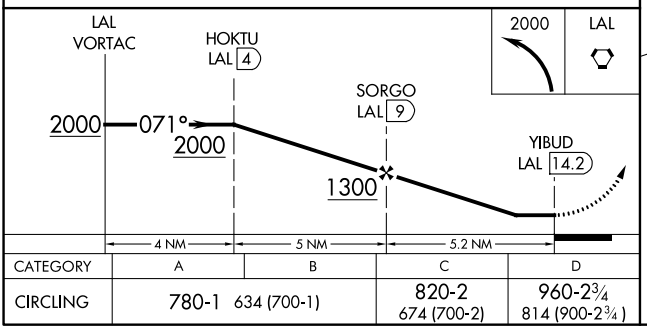

CATEGORY	A	B	C	D
CIRCLING	780-1	634 (700-1)	820-2	674 (700-2)	960-2¾	814 (900-2¾)

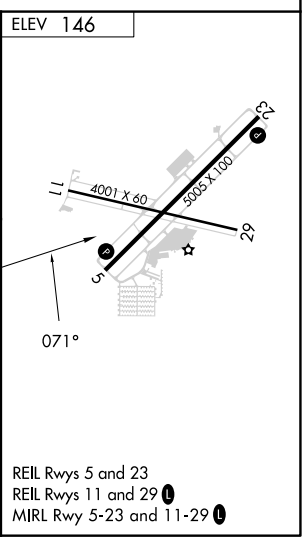

REIL Rwys 5 and 23
REIL Rwys 11 and 29 L
MIRL Rwy 5-23 and 11-29 L

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024