



LOC/DME	I-RVT	APP CRS	Rwy Idg	8003
111.15		002°	TDZE	261
Chan 48 (Y)			Apt Elev	264

ILS or LOC RWY 36
GOLDEN TRIANGLE RGNL (GTR)


DME or RADAR required.	MISSED APPROACH: Climb to 900 then climbing left turn to 2400 on IGB VORTAC R-266 to HANOP INT/IGB VORTAC 13 DME and hold.
------------------------	--

ATIS 126.375	COLUMBUS APP CON★ 135.6 323.275	GOLDEN TRIANGLE TOWER★ 118.2 (CTAF) 0 298.875	GND CON 135.375 322.475	CLNC DEL 135.375 322.475
-----------------	------------------------------------	--	----------------------------	-----------------------------

CLNC DEL 126.25 (When twr closed)	UNICOM 122.95
---	------------------

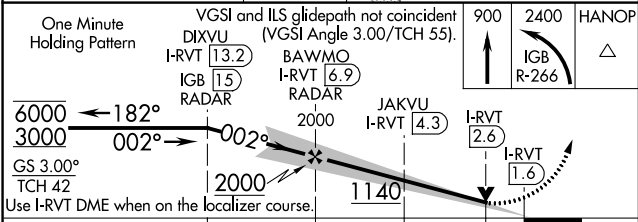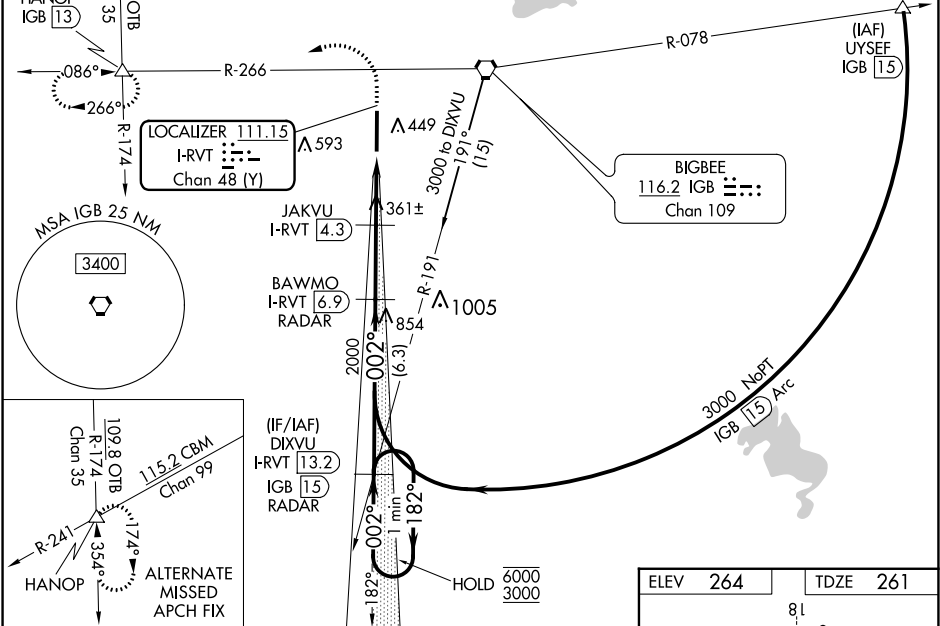

CATEGORY	A	B	C	D	E
S-ILS 36		461-3/4	200 (200-3/4)		
S-LOC 36	1140-1 1/4	879 (900-1 1/4)	1140-2 1/2	879 (900-2 1/2)	
CIRCLING	1140-1 1/4	876 (900-1 1/4)	1140-2 1/2 876 (900-2 1/2)	1140-2 3/4 876 (900-2 3/4)	1140-3 876 (900-3)
JAKVU FIX MINIMUMS					
S-LOC 36		620-1	359 (400-1)		
CIRCLING	760-1	496 (500-1)	960-2 696 (700-2)	960-2 1/4 696 (700-2 1/4)	960-2 1/2 696 (700-2 1/2)

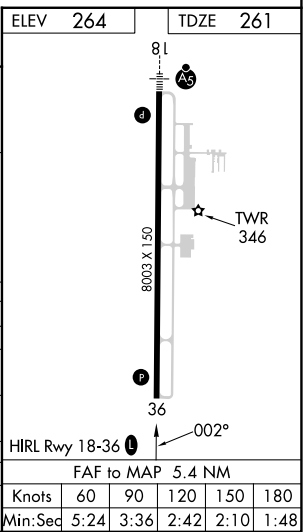

SC-4, 22 FEB 2024 to 21 MAR 2024

SC-4, 22 FEB 2024 to 21 MAR 2024

WAAS CH 99600 W36A	APP CRS 002°	Rwy Idg 8003 TDZE 261 Apt Elev 264
--	------------------------	---

RNAV (GPS) RWY 36

GOLDEN TRIANGLE RGNL (GTR)

RNP APCH.

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Columbus AFB altimeter setting: increase LPV DA to 500 feet, LNAV/VNAV DA to 593 feet and LNAV/VNAV visibility ½ SM; increase all MDAs 40 feet. Baro-VNAV and VDP NA when using Columbus AFB altimeter setting.

MISSED APPROACH:
Climb to 3000 direct HUYKA and hold.

ATIS 126.375	COLUMBUS APP CON ★ 135.6 323.275	GOLDEN TRIANGLE TOWER ★ 118.2 (CTAF) 0 298.875	GND CON 135.375 322.475	CLNC DEL 135.375 322.475
------------------------	--	--	-----------------------------------	------------------------------------

