ILS or LOC RWY 4

AUBURN/LEWISTON MUNI (LEW)

LOC/DME I-LEW	APP CRS	Rwy Idg	5001
108.9	041°	TDZE	270
Chan 26		Apt Elev	288

DME required. RNP APCH - GPS.

Circling to Rwy 17, 22, 35 NA at night. For inop ALS, increase S-LOC 4 Cat A visibility to 1 SM, and Cat C/D to 2½ SM.

MALSR

MISSED APPROACH: Climb to 900 then climbing right turn to 3000 on heading 080° and on AUG VOR/DME R-246 to MOYER/AUG 10 DME and hold.

AWOS-3PT	PORTLAND APP CON ★	CLNC DEL	UNICOM
118.025	125.5 353.9	124.05	122.8 (CTAF) L

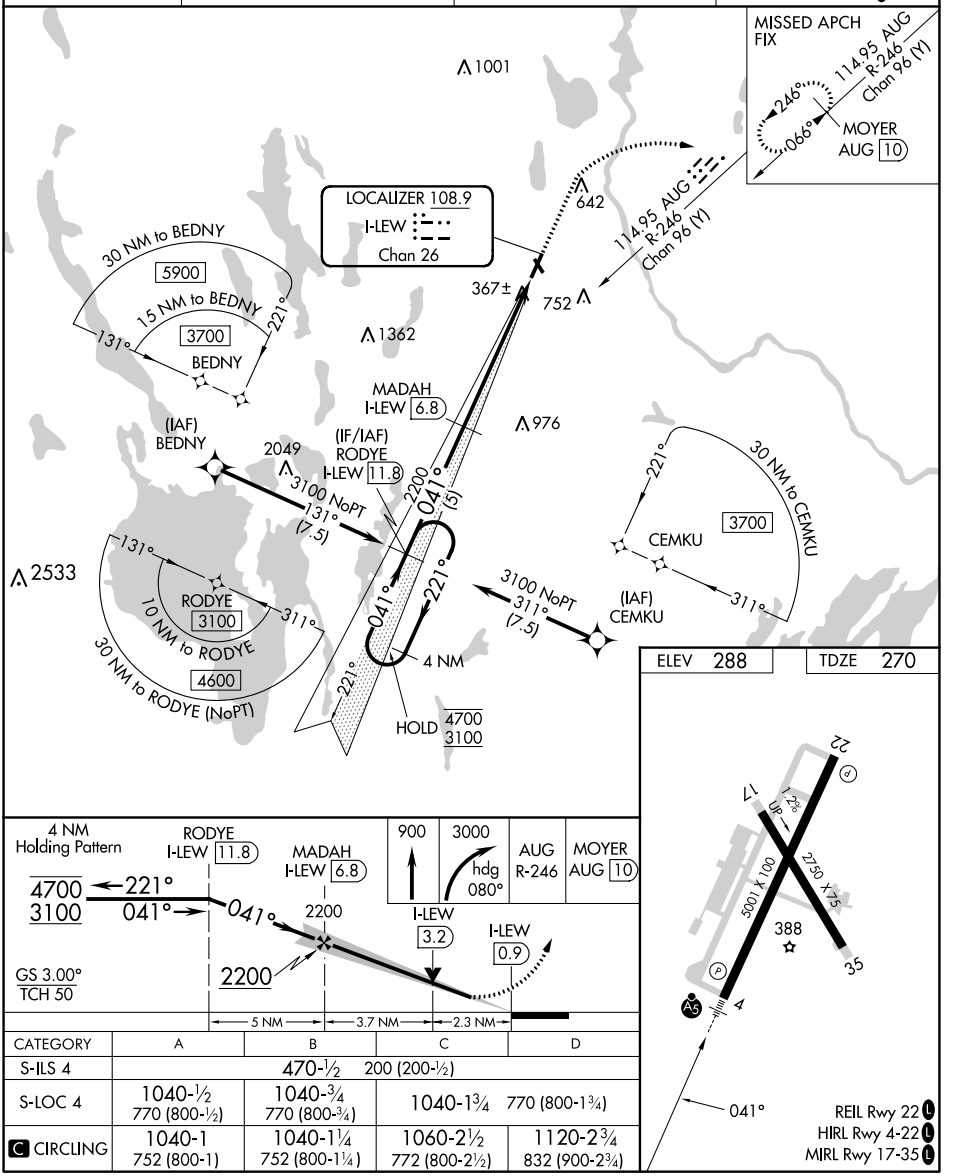

CATEGORY	A	B	C	D
S-ILS 4	470-½ 200 (200-½)			
S-LOC 4	1040-½ 770 (800-½)	1040-¾ 770 (800-¾)	1040-1¾ 770 (800-1¾)	
C CIRCLING	1040-1 752 (800-1)	1040-1¼ 752 (800-1¼)	1060-2½ 772 (800-2½)	1120-2¾ 832 (900-2¾)

NE-1, 22 FEB 2024 to 21 MAR 2024
NE-1, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 22

AUBURN/LEWISTON MUNI (LEW)

WAAS CH 78019 W22A	APP CRS 221°	Rwy Idg 5001 / TDZE 270 / Apt Elev 288

RNP APCH.

Procedure NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Rwy 22 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Augusta altimeter setting: increase LPV all Cats DA to 617 feet and all Cats visibility ⅛ SM; LNAV/VNAV all Cats DA to 938 feet and all Cats visibility ½ SM; increase all MDA 80 feet and LNAV Cat C/D visibility ⅜ SM. Baro-VNAV NA when using Augusta altimeter setting.

MISSED APPROACH: Climb to 3100 direct AUBIN and hold.

AWOS-3PT	PORTLAND APP CON ★	CLNC DEL	UNICOM
118.025	125.5 353.9	124.05	122.8 (CTAF) L

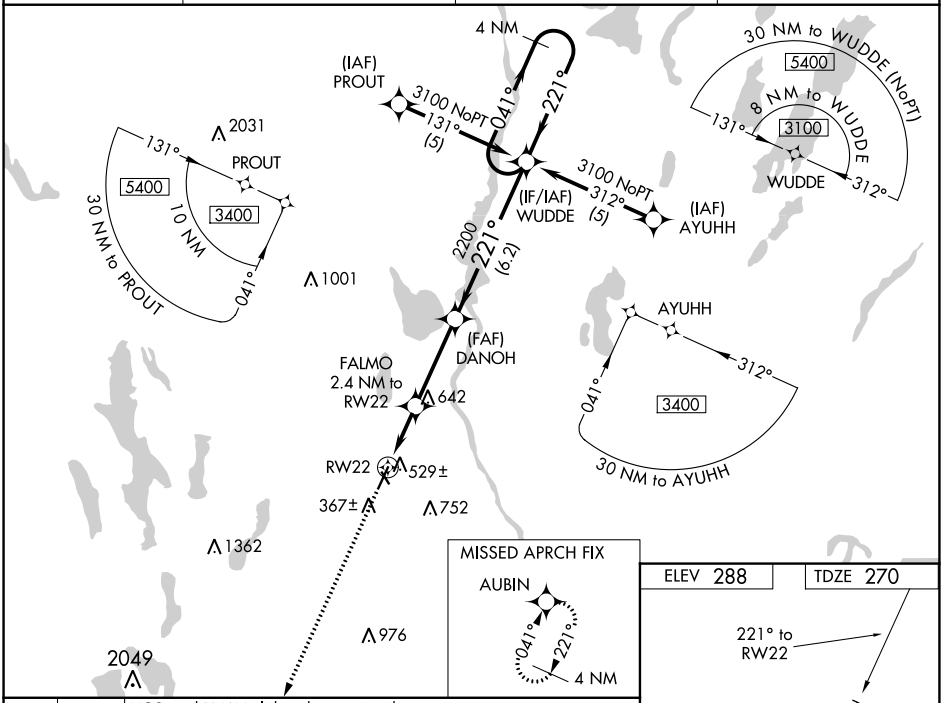

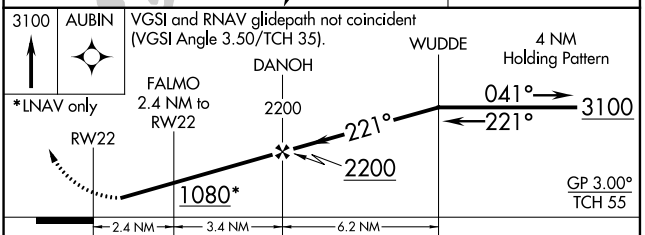

CATEGORY	A	B	C	D
LPV DA	546-1 276 (300-1)			
LNAV/VNAV DA	867-2 597 (600-2)			
LNAV MDA	780-1 510 (500-1)		780-1⅜ 510 (500-1⅜)	

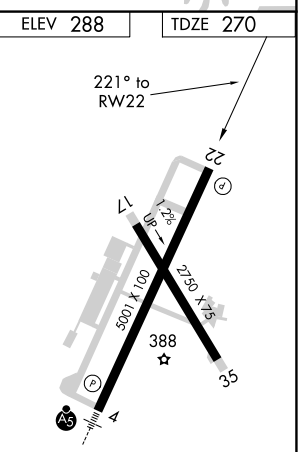

NE-1, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 4

AUBURN/LEWISTON MUNI (LEW)

WAAS	APP CRS		
CH **69219**	**041°**	Rwy Idg	**5001**
W04A		TDZE	**270**
		Apt Elev	**288**

Circling to Rwy 17, 22, 35 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase visibility LNAV/VNAV all Cats to 1⅜ SM, LNAV Cat A/B to 1 SM and Cat C/D to 1⅝ SM. Rwy 04 helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH: Climb to 3100 direct WUDDE and hold.

AWOS-3PT	PORTLAND APP CON ★	CLNC DEL	UNICOM
118.025	**125.5 353.9**	**124.05**	**122.8** (CTAF) L

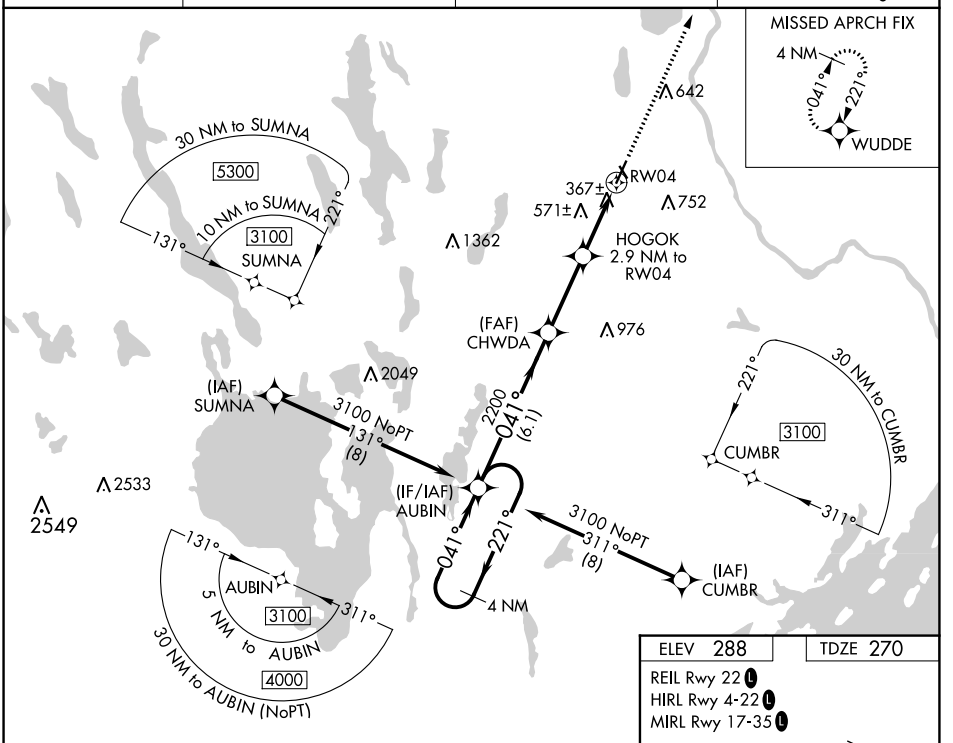

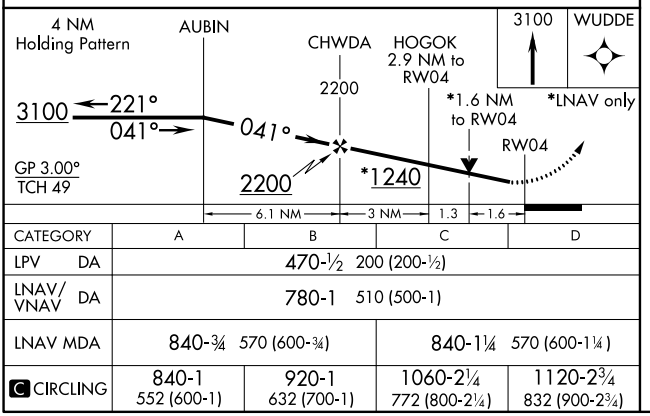

CATEGORY	A	B	C	D
LPV DA	470-½ 200 (200-½)			
LNAV/VNAV DA	780-1 510 (500-1)			
LNAV MDA	840-¾ 570 (600-¾)		840-1¼ 570 (600-1¼)	
C CIRCLING	840-1 552 (600-1)	920-1 632 (700-1)	1060-2¼ 772 (800-2¼)	1120-2¾ 832 (900-2¾)

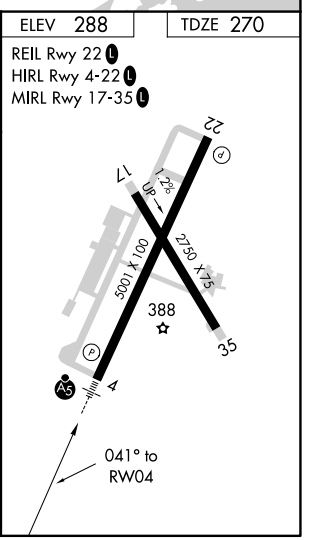

NE-1, 22 FEB 2024 to 21 MAR 2024
NE-1, 22 FEB 2024 to 21 MAR 2024