

WAAS
CH **53528**
W18A

APP CRS
180°

Rwy Idg **5199**
TDZE **430**
Apt Elev **430**


RNAV (GPS) RWY 18

LAWRENCEVILLE-VINCENNES INTL (L WV)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F).
⚠ DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Carmel altimeter setting. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA 656 feet; increase LNAV/VNAV DA to 902 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM; and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct
VOCUT and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) ①
----------------------	--	---------------------------------

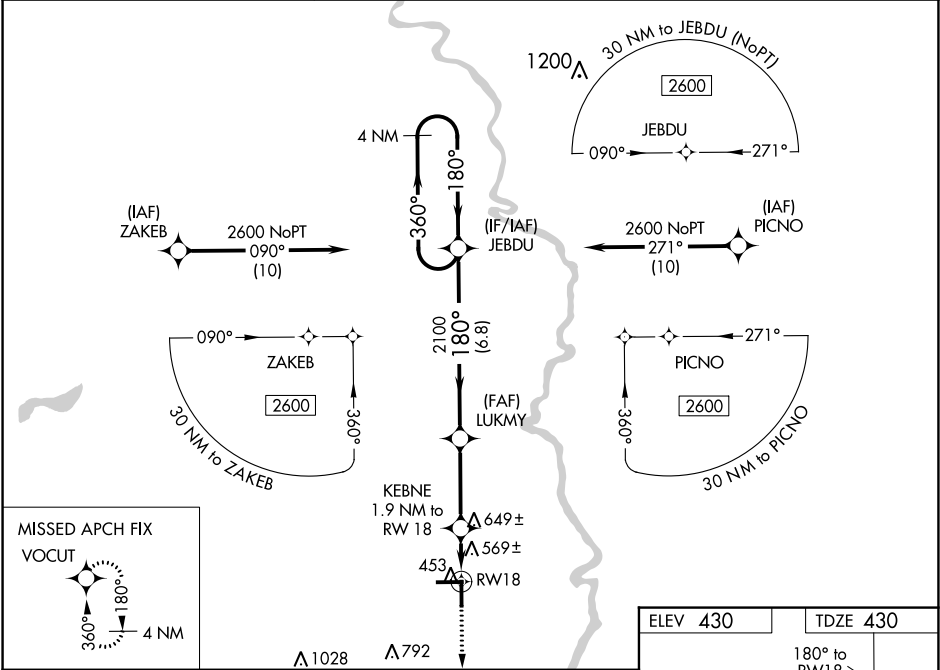

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).		2600	VOCUT
2600		JEBDU		LUKMY	KEBNE
GP 3.00° TCH 45		2100		1.9 NM to RWY 18	RWY 18
360°		180°		*1060	
180°		6.8 NM		3.2 NM	
1.9 NM		*LNNAV only.			
CATEGORY	A	B	C	D	
LPV DA	630-¾ 200 (200-¾)				
LNAV/VNAV DA	876-1½ 446 (500-1½)				
LNAV MDA	940-1	510 (600-1)	940-1¾	510 (600-1¾)	
CIRCLING	940-1	510 (600-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)	

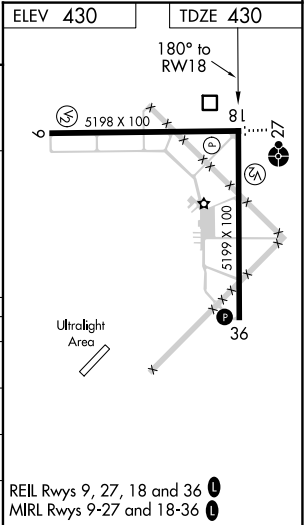

WAAS CH 99528 W36A	APP CRS 360°	Rwy Idg 5199 TDZE 428 Apt Elev 430
--	------------------------	---



RNAV (GPS) RWY 36

LAWRENCEVILLE-VINCENNES INTL (L WV)

⚠ Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). Rwy 36 Straight-in and Circling minimums NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet; increase LNAV/VNAV DA to 850 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM and Circling visibility Cat D ¼ SM.

MISSED APPROACH:
Climb to 2600 direct JEBDU and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

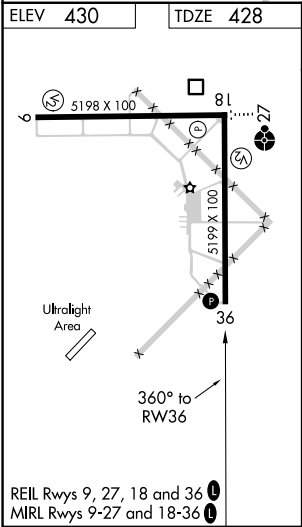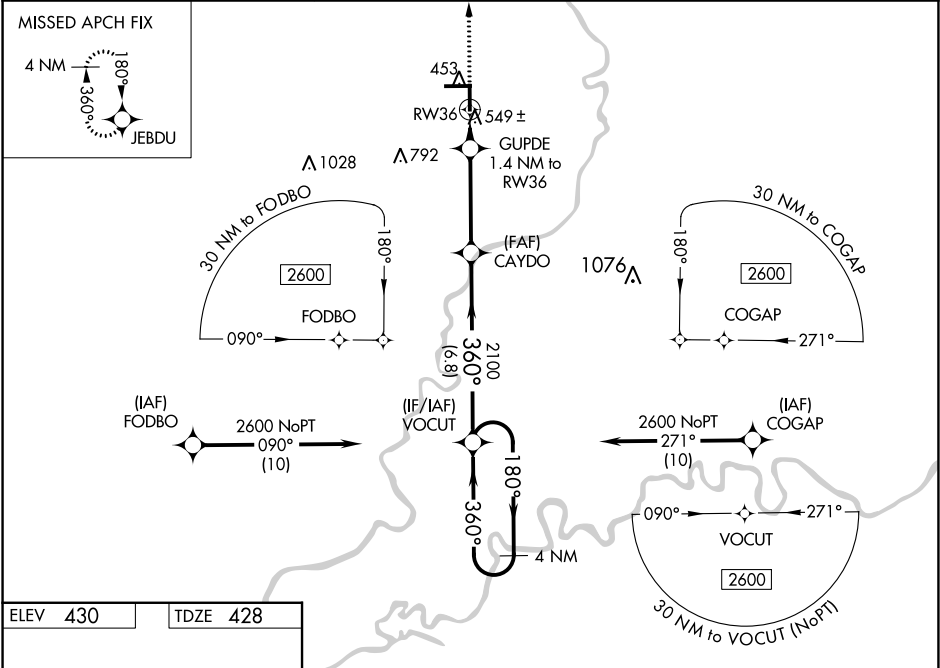

2600

↑

JEBDU

✦

* LNAV only.

GUPDE

1.4 NM to RW36

RW36

1.4 NM

CAYDO

2100

VOCUT

4 NM Holding Pattern

180° →

← 360°

2600

GP 3.00°

TCH 41

360°

2100

*900

3.7 NM

6.8 NM

CATEGORY	A	B	C	D
LPV DA	678-1 250 (300-1)			
LNAV/VNAV DA	824-1½ 396 (400-1½)			
LNAV MDA	800-1 372 (400-1)			
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

WAAS CH 93728 W09A	APP CRS 090°	Rwy ldg 5198 TDZE 428 Apt Elev 430
--	------------------------	---

RNAV (GPS) RWY 9


LAWRENCEVILLE-VINCENNES INTL (LWV)

⚠

Baro-VNAV NA when using Mount Carmel altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Mount Carmel altimeter setting: increase LPV DA to 704 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 855 feet and all visibilities ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ½ SM, and Circling visibility Cat D ¼ SM. Circling to Rwy 36 NA at night.

MISSED APPROACH:
Climb to 2600 direct YONUB and hold.

ASOS 118.0	EVANSVILLE APP CON ★ 125.6 343.7	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

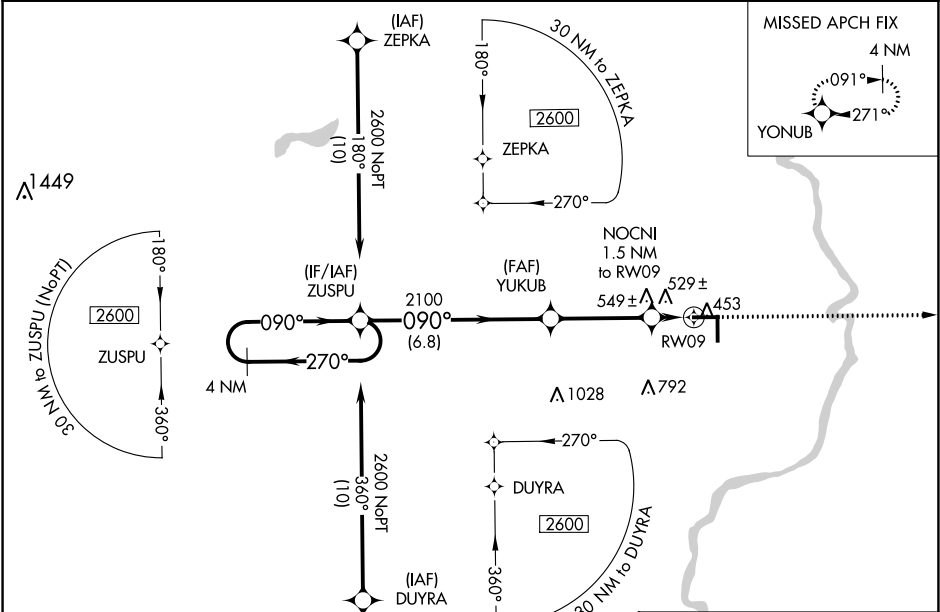

4 NM Holding Pattern

2600 ← 270°
→ 090°

GP 3.00°
TCH 45

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 26).

ZUSPU

YUKUB

NOCNI 1.5 NM to RWY 9

RWY 9

*940

6.8 NM 3.6 NM 1.5 NM

ELEV 430

TDZE 428

YONUB

090° to RWY 9

5198 X 100

5199 X 100

36

81

27

Ultralight Area

CATEGORY	A	B	C	D
LPV DA		678-¾	250 (300-¾)	
LNAV/VNAV DA		829-1¾	401 (400-1¾)	
LNAV MDA	820-1	392 (400-1)	820-1½	392 (400-1½)
CIRCLING	880-1 450 (500-1)	900-1 470 (500-1)	940-1½ 510 (600-1½)	1160-2¼ 730 (800-2¼)

REIL Rwy 9, 27, 18 and 36 0
MIRL Rwy 9-27 and 18-36 0