

WAAS CH 45836 W22A	APP CRS 223°	Rwy Idg TDZE Apt Elev	4504 90 92
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 22

MARION COUNTY (MAO)


⚠

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 53 feet and all visibilities ¼ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.


MISSED APPROACH:

Climb to 2000 direct OCAGI and hold.

AWOS-3 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

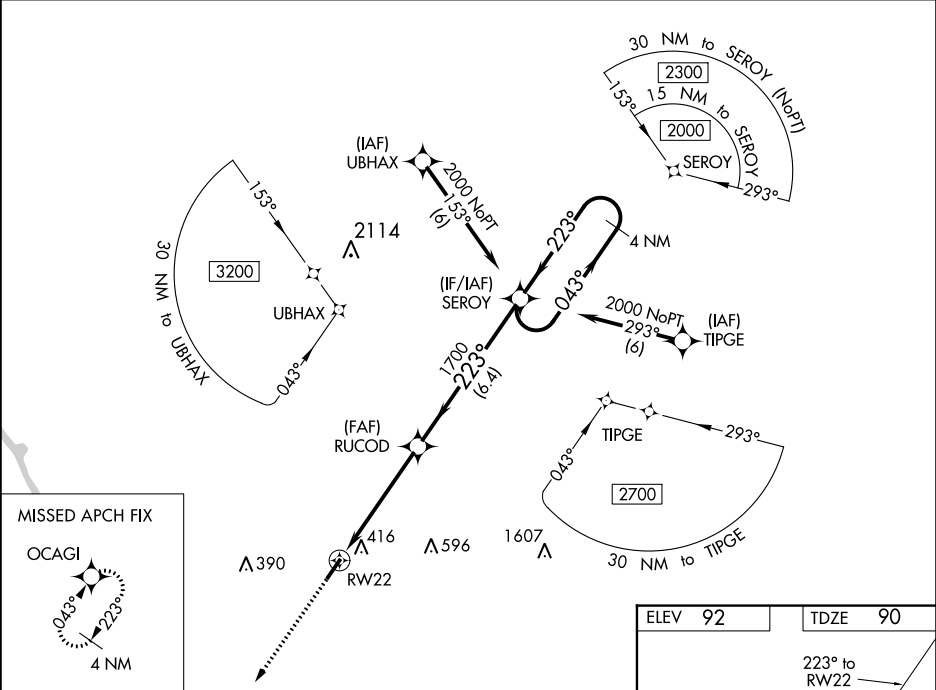

2000	OCAGI				
					
		RUCOD	SEROY	4 NM Holding Pattern	
		1700		043° →	2000
				← 223°	
					GP 3.00° TCH 39
		RW22	223°	1700	
		4.9 NM		6.4 NM	
CATEGORY	A	B	C	D	
LPV DA	396-1		306 (400-1)		
LNAV/VNAV DA	577-1½		487 (500-1½)		
LNAV MDA	680-1	590 (600-1)	680-1¾	590 (600-1¾)	
CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)	

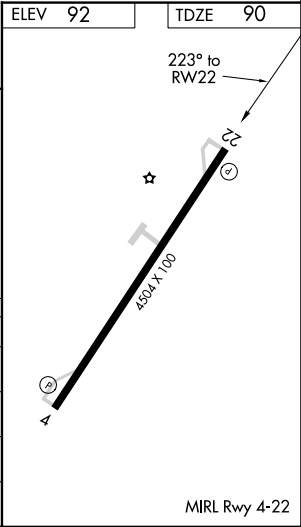

WAAS CH 40336 W04A	APP CRS 043°	Rwy Idg TDZE 92 Apt Elev 92	4504
--	------------------------	---	-------------

RNAV (GPS) RWY 4





MARION COUNTY (MAO)

⚠

Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local glimeter setting not received, use Florence glimeter setting and increase all DA 53 feet and all visibilities ¼ mile, increase all MDA 60 feet and all Cat C/D visibilities ¼ mile.

MISSED APPROACH:
Climb to 2000 direct
SEROY and hold.

AWOS-3 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

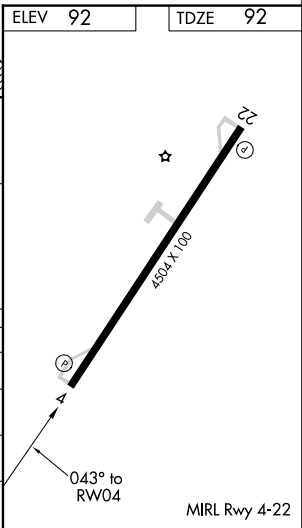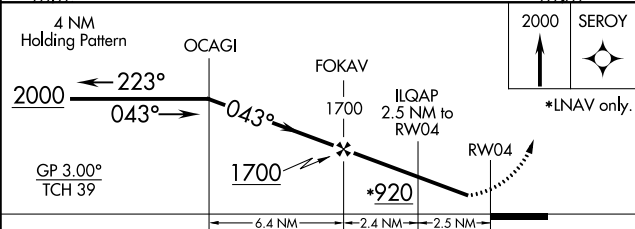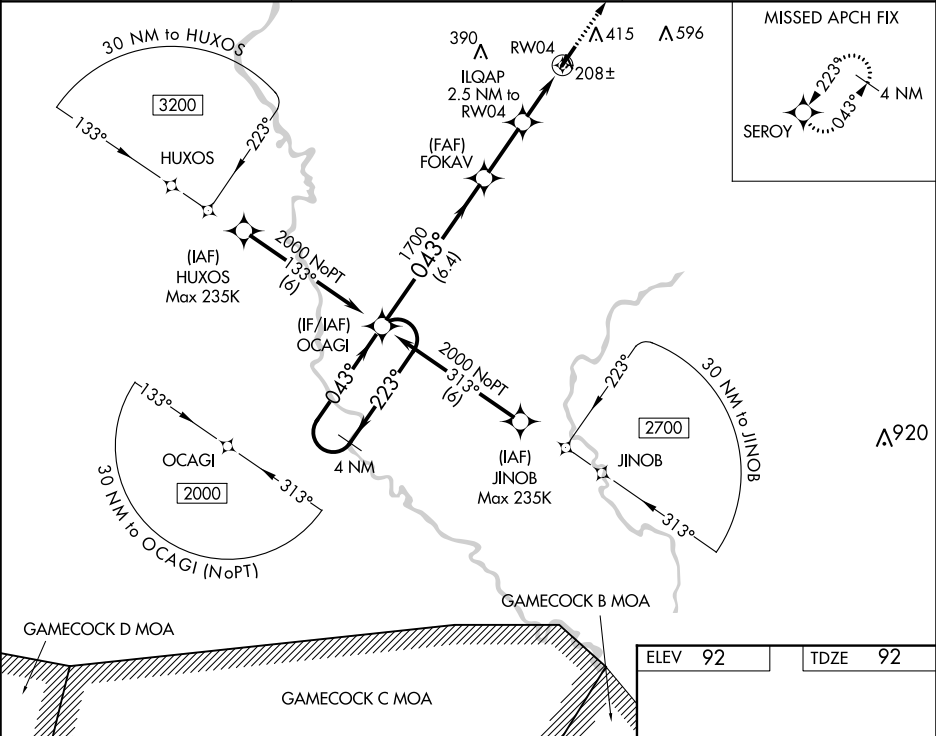

CATEGORY	A	B	C	D
LPV DA	342-7/8	250 (300-7/8)	342-1	250 (300-1)
LNAV/VNAV DA	369-7/8	277 (300-7/8)	369-1	277 (300-1)
LNAV MDA	460-1		368 (400-1)	
CIRCLING	720-1	628 (700-1)	720-1¾ 628 (700-1¾)	960-2¾ 868 (900-2¾)

VORTAC FLO 115.2 Chan 99	APP CRS 104°	Rwy Idg TDZE Apt Elev 92	N/A N/A 92	VOR/DME-A MARION COUNTY (MAO)
--	------------------------	--	-------------------------	----------------------------------

▼

▲

When local altimeter setting not received, use Florence altimeter setting and increase all MDA 60 feet. Increase Cat C/D visibility ¼ mile.

MISSED APPROACH: Climbing right turn to 1700 on heading 330° and on FLO VORTAC R-104 to GOADD/FLO 12 DME and hold.

AWOS-3 119.875	FLORENCE APP CON ★ 135.25 316.15	UNICOM 122.8 (CTAF)
--------------------------	--	-------------------------------

