

## RNAV (GPS) RWY 11

AL-2440 [USN]

GOLIAD NOLF (KNGT)


|                         |                              |                                         |
|-------------------------|------------------------------|-----------------------------------------|
| APCH CRS<br><b>105°</b> | Rwy Idg<br>TDZE<br>Arpt Elev | <b>8000</b><br><b>318</b><br><b>322</b> |
|-------------------------|------------------------------|-----------------------------------------|

RNP APCH - DME/DME RNP-0.3 NA.

When local allimeter setting not received, use Beeville Muni allimeter setting.

**MISSED APPROACH:** Climb to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.

|         |                 |
|---------|-----------------|
| ASOS    | CTAF            |
| 353.675 | 132.875 307.075 |

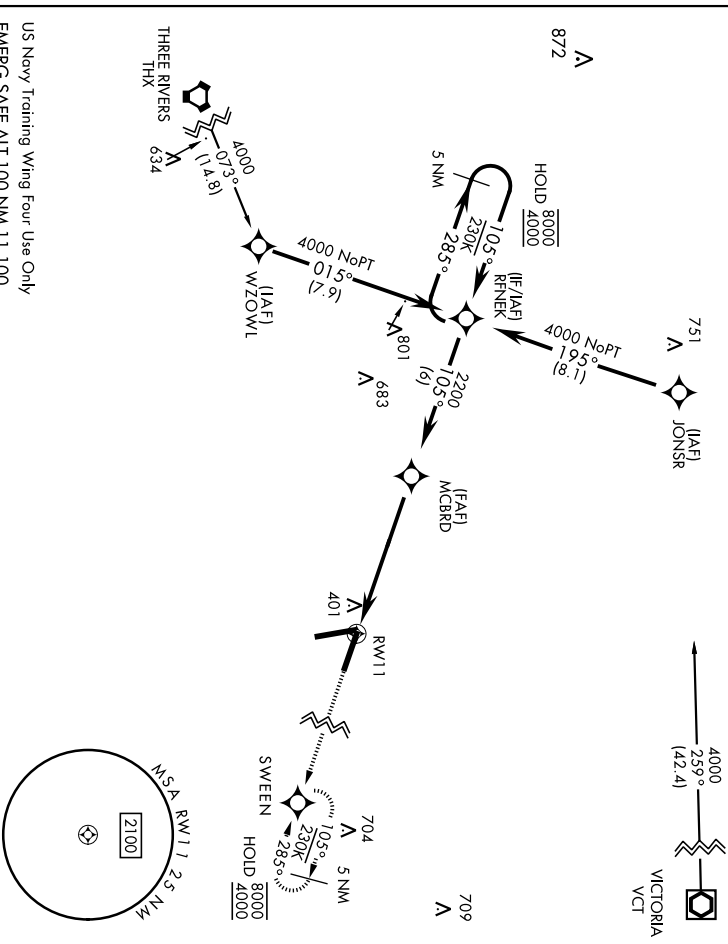

US Navy Training Wing Four Use Only  
EMERG SAFE ALT 100 NM 11,100

| 5 NM Holding Pattern                   |                   |                     |                     | VDP NA with Beaville Muni altimeter setting | 4000 | SWEEN | ELEV 322 | TDZE 318 |
|----------------------------------------|-------------------|---------------------|---------------------|---------------------------------------------|------|-------|----------|----------|
|                                        |                   |                     |                     | RFNEK                                       |      |       |          |          |
| CATEGORY                               | A                 | B                   | C                   | D                                           |      |       |          |          |
| INAV MDA                               | 720-1 402 (400-1) | 720-1½ 402 (400-1½) |                     |                                             |      |       |          |          |
| CIRCLING                               | 800-1 478 (500-1) | 820-1 498 (500-1)   | 820-1½ 498 (500-1½) | 880-2 558 (600-2)                           |      |       |          |          |
| BEAVILLE MUNI ALTIMETER SETTING MINIMA |                   |                     |                     |                                             |      |       |          |          |
| INAV MDA                               | 760-1 442 (500-1) | 760-1¾ 442 (500-1¾) |                     |                                             |      |       |          |          |
| CIRCLING                               | 800-1 478 (500-1) | 820-1 498 (500-1)   | 820-1½ 498 (500-1½) | 880-2 558 (600-2)                           |      |       |          |          |
|                                        |                   |                     |                     |                                             |      |       |          |          |
|                                        |                   |                     |                     |                                             |      |       |          |          |

BERCLAIR, TEXAS  
Amdt 3 05OCT23

28° 37' N-97° 37' W

RNAV (GPS) RWY 11

GOLIAD NOLF (KNGT)





RNAV (GPS) RWY 35

|          |           |      |
|----------|-----------|------|
| APCH CRS | Rwy Idg   | 8001 |
| 346°     | TDZE      | 307  |
|          | Apch Elev | 322  |

AL2440 (USN)

GOILAD NOUF (KNGT)



RNP APCH  
When local altimeter setting not received, use Beeville Muni altimeter setting.

MISSED APPROACH: Climb to 900, then climbing right turn to 4000 direct SWEEN and hold, continue climb in hold to 4000

|         |                 |
|---------|-----------------|
| ASOS    | CTAF            |
| 363.675 | 132.875 307.075 |

.515

A 709

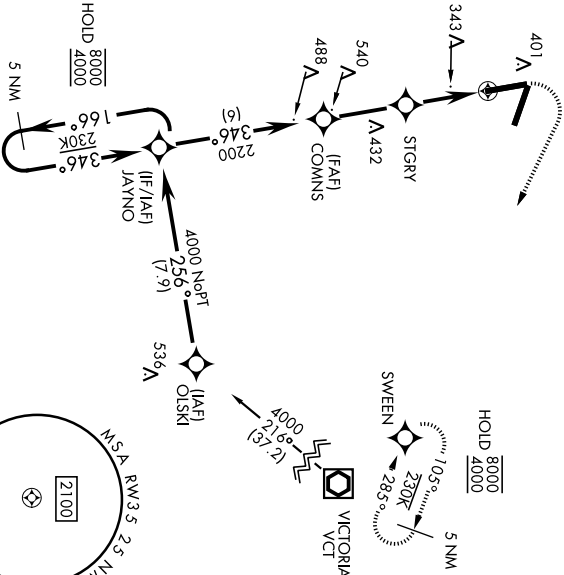


US Navy Training Wing Four Use Only  
EMERG SAFE ALT 100 NM 11,100



|      |     |      |     |
|------|-----|------|-----|
| ELEV | 322 | TDZE | 307 |
|------|-----|------|-----|

|          |             |             |              |             |
|----------|-------------|-------------|--------------|-------------|
| CATEGORY | A           | B           | C            | D           |
| UNAV MDA | 620-1       | 313         | (300-1)      |             |
| UNAV MDA | 760-1       | 780-1       |              | 880-2       |
| CIRCLING | 438 (500-1) | 458 (500-1) | 458 (500-1½) | 558 (600-2) |
| UNAV MDA | 660-1       | 353         | (400-1)      |             |
| CIRCLING | 800-1       | 820-1       | 820-1½       | 880-2       |
|          | 478 (500-1) | 498 (500-1) | 498 (500-1½) | 558 (600-2) |

BEEVILLE MUNI ALTIMETER SETTING MINIMA

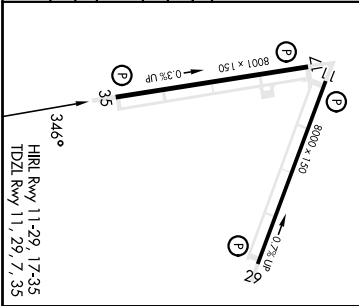

RNAV (GPS) RWY 35