WAAS CH 40234 W17A	APP CRS 175°	Rwy Idg 3704 TDZE 27 Apt Elev 28

RNAV (GPS) RWY 17

ORMOND BEACH MUNI (OMN)

Baro-VNAV NA when using Daytona Beach altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Daytona Beach altimeter setting and increase all DA 19 feet and all MDA 20 feet; increase LNAV Cat C visibility ⅛ mile. VDP NA when using Daytona Beach altimeter setting.

MISSED APPROACH: Climb to 600 then climbing right turn to 2800 direct FLYHI and hold.

ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	CLNC DEL	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	121.625	123.05

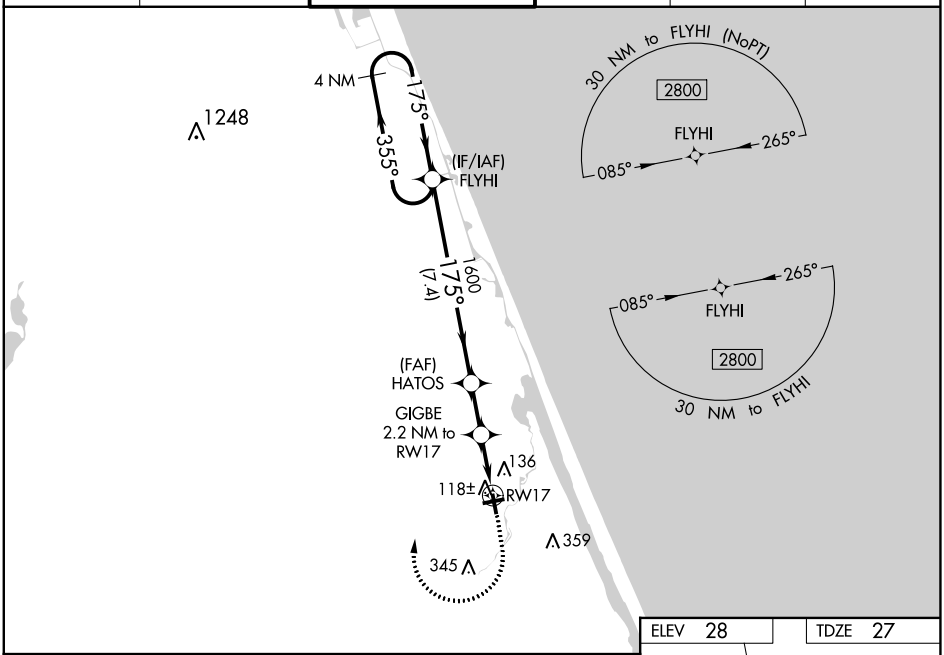

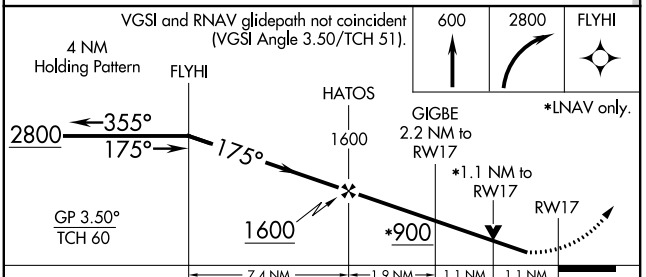

CATEGORY	A	B	C	D
LPV DA	302-1	275 (300-1)		NA
LNAV/VNAV DA	288-1	261 (300-1)		NA
LNAV MDA	400-1	373 (400-1)		NA
C CIRCLING	500-1	471 (500-1)	740-2 711 (800-2)	NA

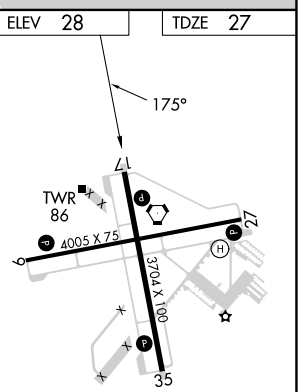

REIL Rwys 9, 17, 27, and 35 L
MIRL Rwys 9-27 and 17-35 L

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 27

ORMOND BEACH MUNI (OMN)

WAAS	APP CRS	Rwy Idg	4005
CH 77634	265°	TDZE	28
W27A		Apt Elev	28

RNP APCH.

Rwy 27 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2800 direct JEREL and hold.

ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	CLNC DEL	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	121.625	123.05

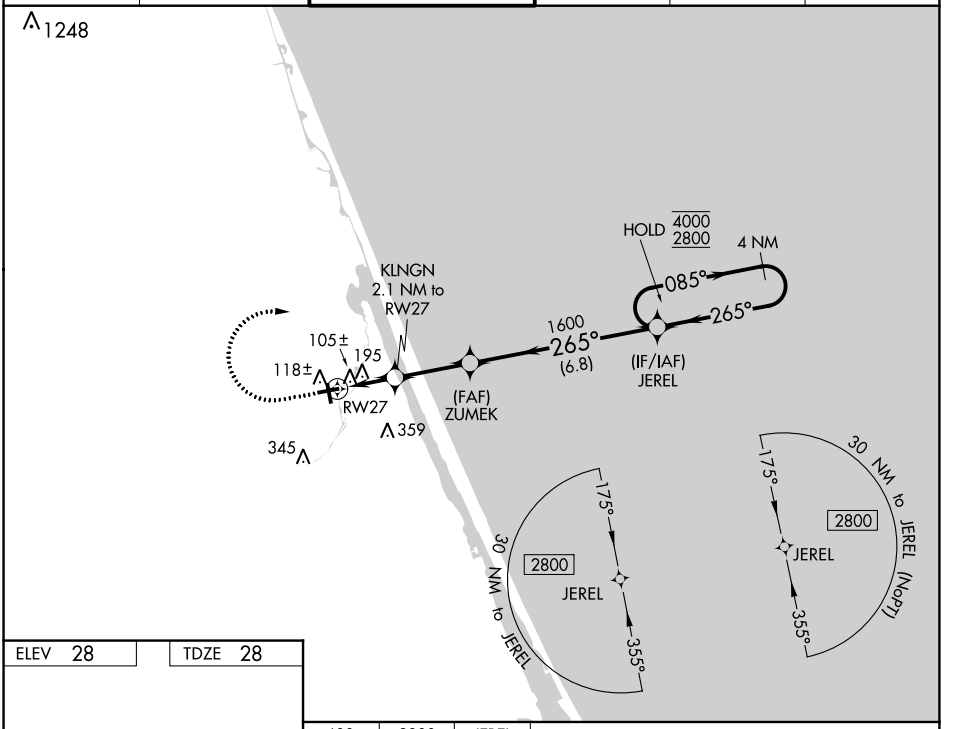

ELEV 28 TDZE 28



REIL Rwys 9, 17, 27, and 35 L
MIRL Rwys 9-27 and 17-35 L

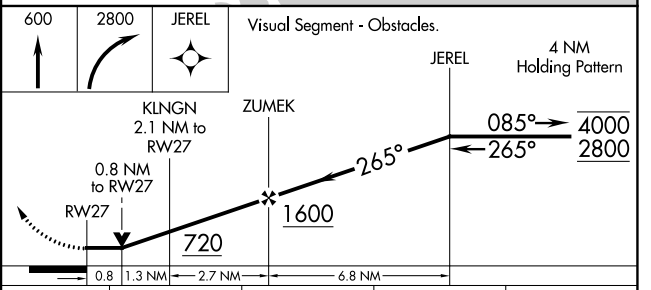

CATEGORY	A	B	C	D
LP MDA	360-1 332 (400-1)			NA
LNAV MDA	460-1 432 (500-1)		460-1¼ 432 (500-1¼)	NA
C CIRCLING	500-1 472 (500-1)		740-2 712 (800-2)	NA

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 9

ORMOND BEACH MUNI (OMN)

WAAS CH 82334 W09A	APP CRS 085°	Rwy Idg 4005 / TDZE 28 / Apt Elev 28

RNP APCH.

Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C or above 54° C. VDP NA when using Daytona Beach altimeter setting.

MISSED APPROACH: Climb to 600 then climbing left turn to 2800 direct ARSUF and hold.

ATIS	DAYTONA APP CON	ORMOND BEACH TOWER★	GND CON	CLNC DEL	UNICOM
118.475	125.8 269.075	119.075 (CTAF) L	121.625	121.625	123.05

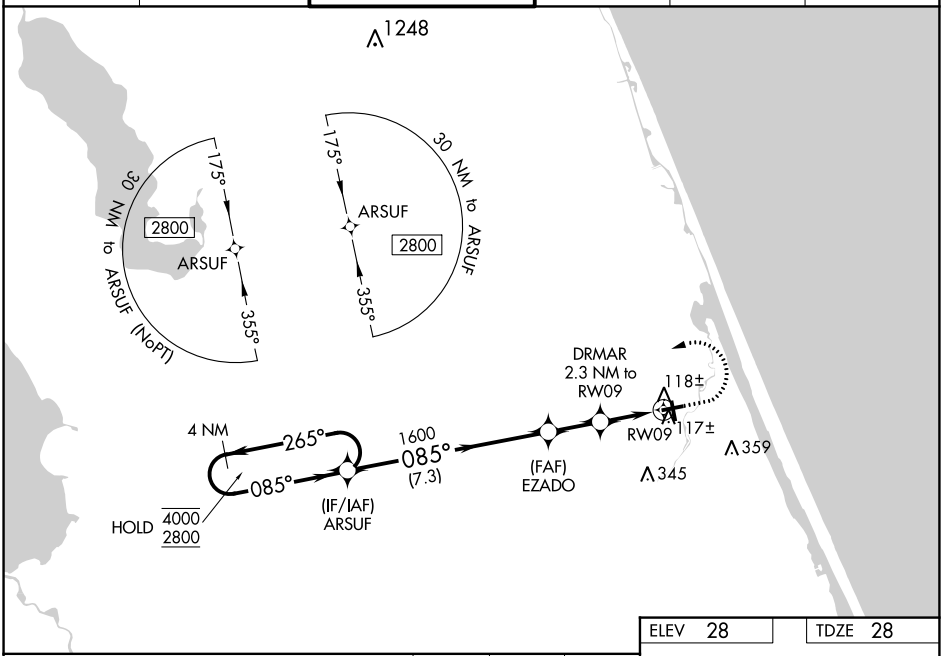

ELEV 28 TDZE 28

VGSI and RNAV glidepath not coincident (VGSI Angle 3.40/TCH 48).

600 2800 ARSUF

*LNAV only.

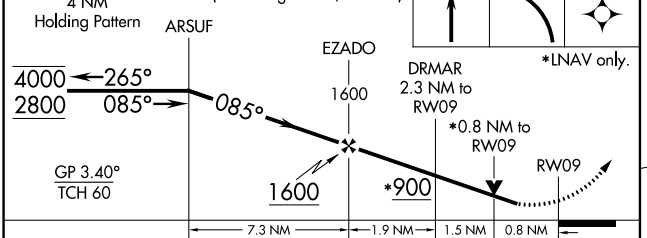



CATEGORY	A	B	C	D
LPV DA	313-1 285 (300-1)			NA
LNAV/VNAV DA	278-1 250 (300-1)			NA
LNAV MDA	380-1 352 (400-1)			NA
C CIRCLING	500-1 472 (500-1)		740-2 712 (800-2)	NA

REIL Rwys 9, 17, 27 and 35 L

MIRL Rwys 9-27 and 17-35 L

SE-3, 22 FEB 2024 to 21 MAR 2024
SE-3, 22 FEB 2024 to 21 MAR 2024