ILS or LOC RWY 9R

OHIO STATE UNIVERSITY (OSU)

LOC I-OSU	APP CRS	Rwy Idg	5004
108.5	092°	TDZE	905
		Apt Elev	905


ADF required for procedure entry. ADF required.

When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase DA to 1140 feet; increase all MDAs 40 feet and S-9R visibility Cat C ⅛ SM and Cat D and Circling Cat D ¼ SM. Circling Rwy 23 NA at night.


MALSR


MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FULER LOM and hold.

ATIS	COLUMBUS APP CON	STATE TOWER ★	GND CON	CLNC DEL	UNICOM
121.35	125.95 317.775	118.8 (CTAF) L 254.325	121.7	121.7	122.95

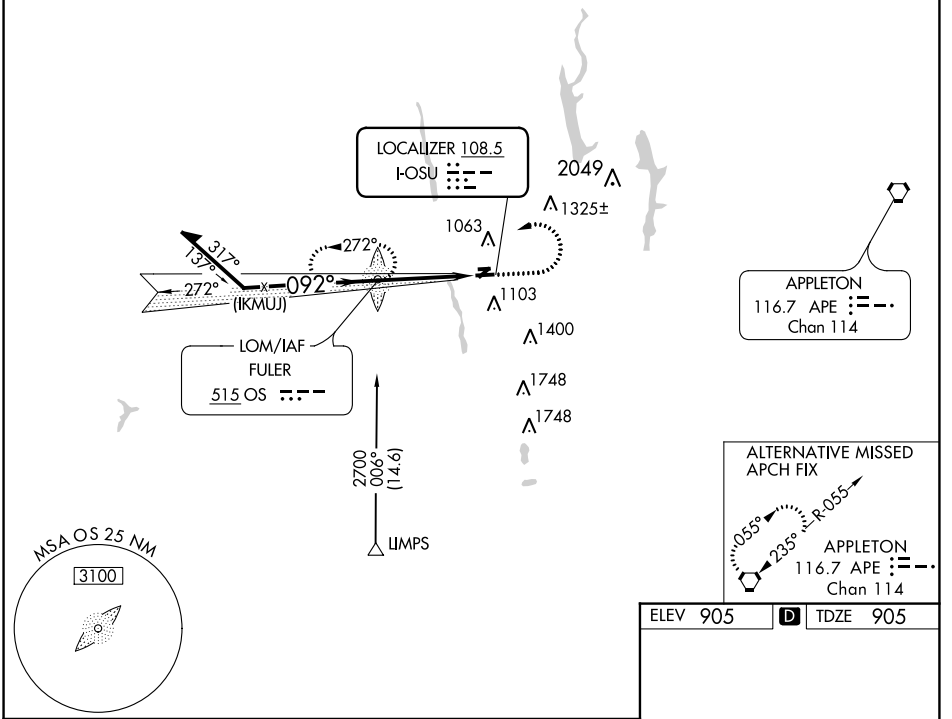

ELEV 905 D TDZE 905

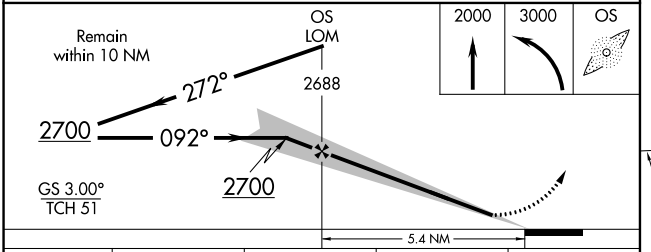



REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 9L-27R

CATEGORY	A	B	C	D
S-ILS 9R	1105-½ 200 (200-½)			
S-LOC 9R	1420-½ 515 (600-½)		1420-1 515 (600- 1)	
CIRCLING	1420-1 515 (600-1)		1420-1½ 515 (600-1½)	1680-2½ 775 (800-2½)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

NDB RWY 9R

OHIO STATE UNIVERSITY (OSU)


LOM OS	APP CRS	Rwy Idg	5004
515	093°	TDZE	905
		Apt Elev	905


When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting and increase all MDAs 40 feet and S-9R visibility Cat C ⅛ SM and Cat D and Circling Cat D ¼ SM. Circling Rwy 23 NA at night.


MALSR

MISSED APPROACH: Climb to 3100 then left turn direct OS LOM and hold.

ATIS	COLUMBUS APP CON	STATE TOWER★	GND CON	CLNC DEL	UNICOM
121.35	125.95 317.775	118.8 (CTAF) L 254.325	121.7	121.7	122.95

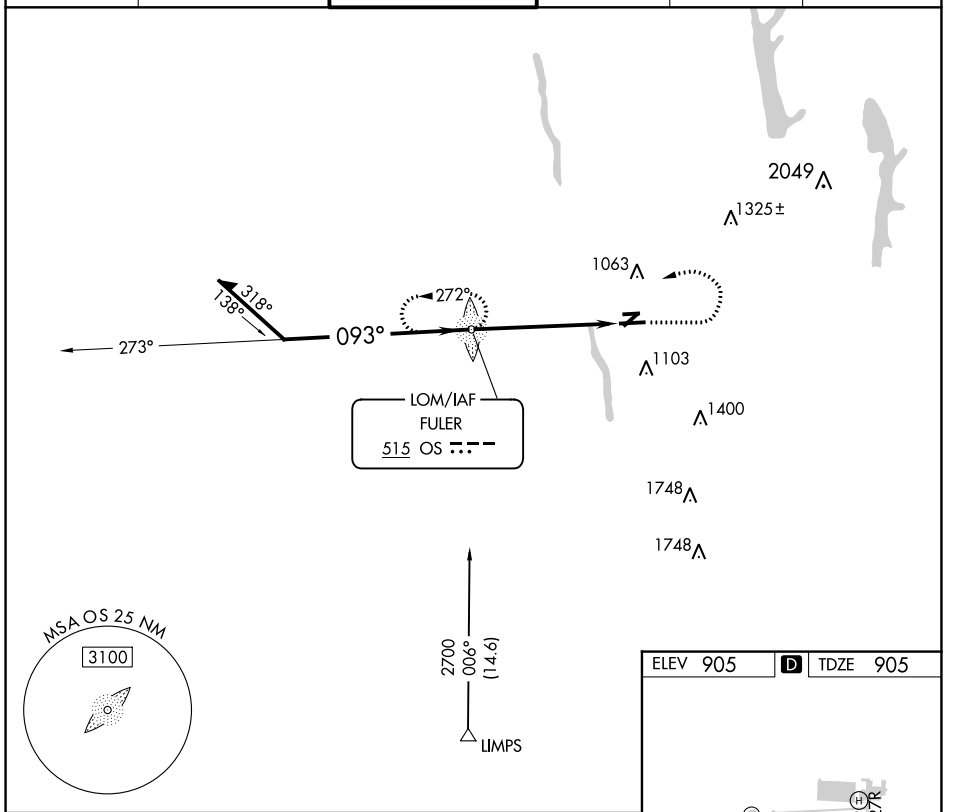

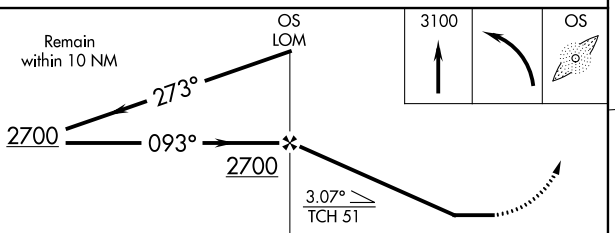



REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 9L-27R

CATEGORY	A	B	C	D
S-9R	1460-¾ 555 (600-¾)		1460-1⅛ 555 (600-1⅛)	
CIRCLING	1460-1 555 (600-1)		1460-1⅝ 555 (600-1⅝)	1680-2½ 775 (800-2½)

FAF to MAP 5.4 NM

Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

WAAS CH 45720 W27A	APP CRS 272°	Rwy Idg 5004 / TDZE 903 / Apt Elev 905

RNAV (GPS) RWY 27L


OHIO STATE UNIVERSITY (OSU)

RNP APCH.


Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1178 feet; increase LNAV/VNAV DA to 1224 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and visibility LNAV Cat C ⅛ SM and Cat D ¼ SM, and Circling Cat D ¼ SM. Circling Rwy 23 NA at night. Rwy 27L helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 3200 direct GLYBU and hold.

ATIS	COLUMBUS APP CON	STATE TOWER ★	GND CON	CLNC DEL	UNICOM
121.35	125.95 317.775	118.8 (CTAF) L 254.325	121.7	121.7	122.95

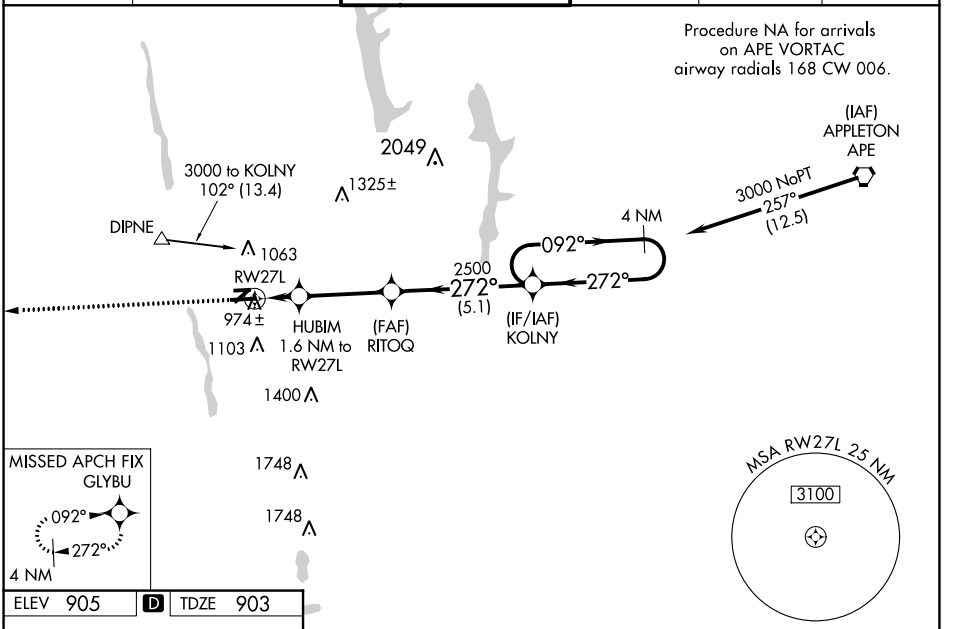

ELEV 905 D TDZ 903



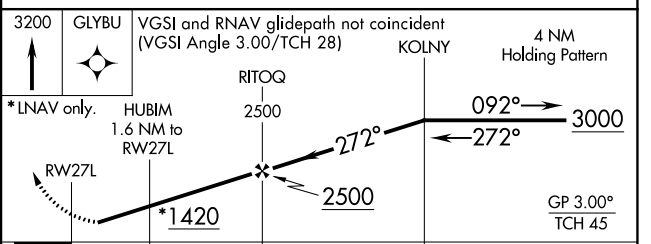

CATEGORY	A	B	C	D
LPV DA	1153-1 250 (300-1)			
LNAV/VNAV DA	1199-1 296 (300-1)			
LNAV MDA	1280-1 377 (400-1)		1280-1⅛ 377 (400-1⅛)	
CIRCLING	1380-1 475 (500-1)	1420-1 515 (600-1)	1420-1½ 515 (600-1½)	1680-2½ 775 (800-2½)

REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 9L-27R

EC-2, 22 FEB 2024 to 21 MAR 2024
EC-2, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 9R

OHIO STATE UNIVERSITY (OSU)

WAAS	APP CRS	Rwy Idg	5004
CH 86420	092°	TDZE	905
W09A		Apt Elev	905


RNP APCH.


Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP NA with John Glenn Columbus Intl altimeter setting. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1140 feet; increase LNAV/VNAV DA to 1227 feet; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, Cat D ¼ SM and Circling Cat D ¼ SM. Circling Rwy 23 NA at night. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 3200 direct KOLNY and hold.


ATIS	COLUMBUS APP CON	STATE TOWER ★	GND CON	CLNC DEL	UNICOM
121.35	125.95 317.775	118.8 (CTAF) 254.325	121.7	121.7	122.95

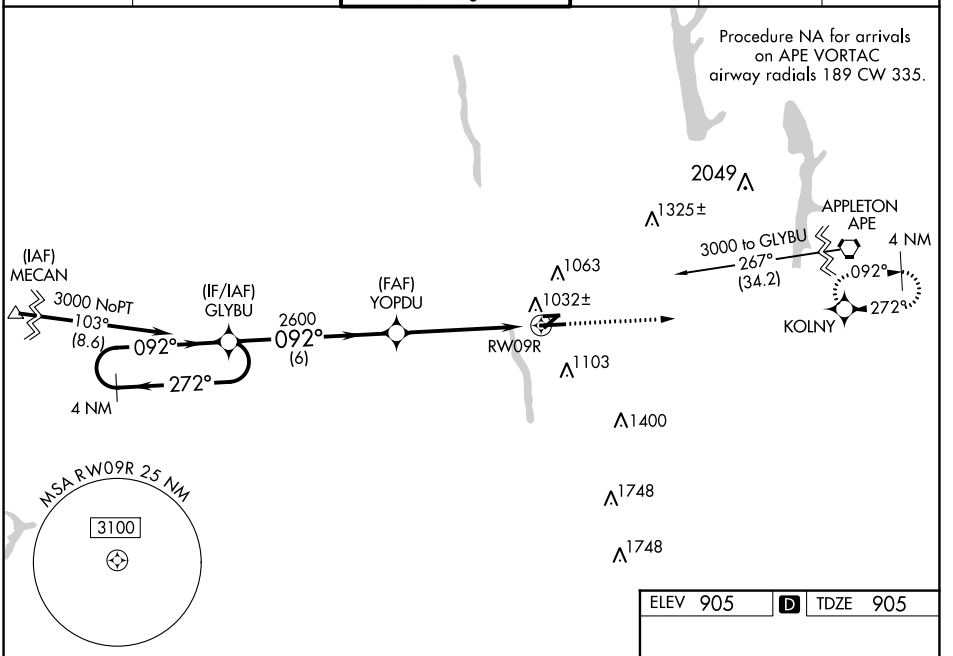

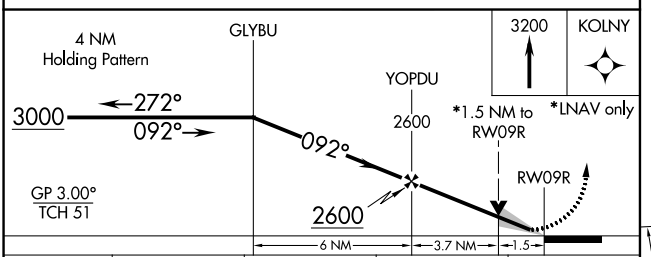

CATEGORY	A	B	C	D
LPV DA	1105-½ 200 (200-½)			
LNAV/VNAV DA	1192-½ 287 (300-½)			
LNAV MDA	1420-½ 515 (600-½)		1420-1 515 (600-1)	
CIRCLING	1420-1 515 (600-1)		1420-1½ 515 (600-1½)	1680-2½ 775 (800-2½)

ELEV 905 D TDZE 905



REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 9L-27R

EC-2, 22 FEB 2024 to 21 MAR 2024

EC-2, 22 FEB 2024 to 21 MAR 2024