

WAAS CH 63114 W18A	APP CRS 180°	Rwy Idg TDZE Apt Elev	5001 978 1003
--	------------------------	-----------------------------	--

RNAV (GPS) RWY 18


CENTRAL KENTUCKY RGNL (RGA)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1295 feet, LNAV/VNAV DA to 1341 feet and all MDA 80 feet; increase LPV all Cats visibility ¼ mile; LNAV/VNAV all Cats and LNAV Cats C and D ¼ mile and Circling visibility Cat C ½ mile, Cat D ¼ mile. VDP and Baro-VNAV NA when using Lexington altimeter setting.

MISSED APPROACH:
Climb to 3100 direct ANETT and hold.

AWOS-3 119.625	LEXINGTON APP CON 120.15 259.3	UNICOM 122.725 (CTAF) ①
--------------------------	--	-----------------------------------

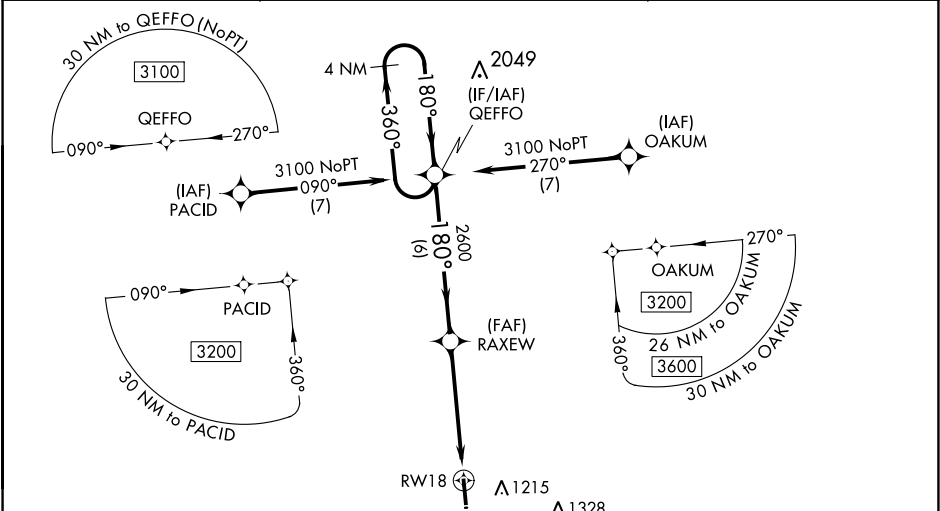


MISSED APCH FIX

ANETT


4 NM

180°

360°

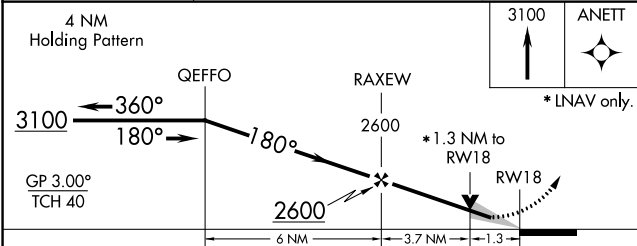

CATEGORY	A	B	C	D
LPV DA		1228-7/8	250 (300-7/8)	
LNAV/VNAV DA		1274-1	296 (300-1)	
LNAV MDA	1440-1	462 (500-1)	1440-13/8	462 (500-13/8)
CIRCLING	1440-1 437 (500-1)	1520-1 517 (600-1)	1520-1½ 517 (600-1½)	1780-2½ 777 (800-2½)

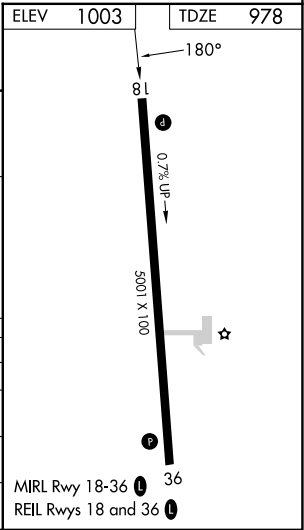

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME HYK

112.6

Chan 73

APP CRS

161°

Rwy Idg

5001

TDZE

978

Apt Elev

1003

VOR RWY 18

CENTRAL KENTUCKY RGNL (RGA)

DME required.

▼

▲

When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 80 feet; increase S-18 Cats C and D visibility ¼ SM; Circling Cat C ½ SM and Circling Cat D ¼ SM.

MISSED APPROACH: Climbing right turn to 2800 on HYK VOR/DME R-161 to HAGEN/15 DME and hold.

AWOS-3 119.625	LEXINGTON APP CON 120.15 259.3	UNICOM 122.725 (CTAF) 0
-------------------	-----------------------------------	----------------------------

