

REDWOOD FALLS, MINNESOTA

AL-5200 (FAA)

23334

WAAS CH 86610 W30A	APP CRS 304°	Rwy Idg 4001 TDZE 1024 Apt Elev 1024
--	------------------------	---

RNAV (GPS) RWY 30


REDWOOD FALLS MUNI (RWF)

RNP APCH - GPS.

- T** Circling Rwy 5, 12 and 23 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 3800 direct ZUMIV and on track 257° to MOLOW and hold.

ASOS 126.575	MINNEAPOLIS CENTER 127.1 290.2	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

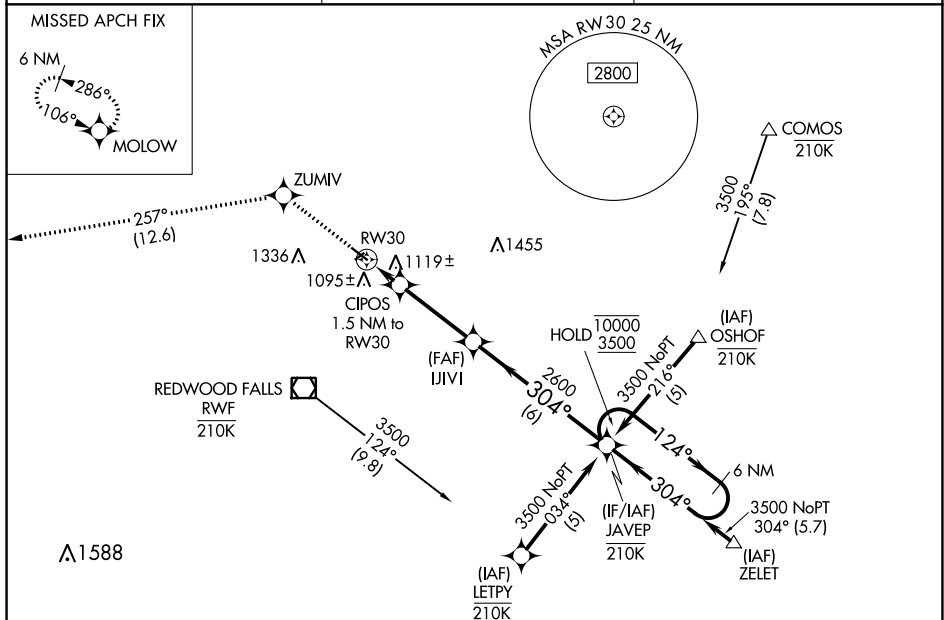

ELEV 1024 TDZE 1024

3800 ZUMIV tr 257° MOLOW

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 37)

JAVEP 6 NM Holding Pattern

124° 304° 10000 3500

GP 3.00° TCH 45

1540 2600

1.5 NM 3.3 NM 6 NM

CATEGORY	A	B	C	D
LPV DA	1274- ³ / ₄	250 (300- ³ / ₄)		
LNAV/VNAV DA	1420-1 ¹ / ₈	396 (400-1 ¹ / ₈)		
LNAV MDA	1380-1	356 (400-1)		
CIRCLING	1480-1 456 (500-1)	1660-1 636 (700-1)	1700-2 676 (700-2)	1700-2 ¹ / ₄ 676 (700-2 ¹ / ₄)

REDWOOD FALLS, MINNESOTA
Amdt 1 30NOV23

44°33'N-95°05'W

REDWOOD FALLS MUNI (RWF)
RNAV (GPS) RWY 30

NC-1, 22 FEB 2024 to 21 MAR 2024

NC-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME RWF

113.3

Chan 80

APP CRS

016°

Rwy Idg

N/A

TDZE

N/A

Apt Elev

1024

VOR-A

REDWOOD FALLS MUNI (RWF)

When local altimeter setting not received, use Olivia Rgnl altimeter setting and increase all MDA 40 feet.

MISSED APPROACH: Climb to 2000 then climbing left turn to 2600 direct RWF VOR/DME and hold.

ASOS 126.575	MINNEAPOLIS CENTER 127.1 290.2	UNICOM 123.0 (CTAF)
-----------------	-----------------------------------	------------------------

