ILS or LOC RWY 35

SUGAR LAND RGNL (SGR)

LOC/DME I-TXH	APP CRS	Rwy Idg	6016
110.7	350°	TDZE	78
Chan 44		Apt Elev	82

DME required.
RADAR required for procedure entry.

VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting and increase all DA 51 feet and all MDA 60 feet and S-LOC 35 Cat C/D visibility ⅛ mile, and Circling Cat C/D visibility ¼ mile.

MISSED APPROACH: Climb to 900 then climbing left turn to 2000 on I-TXH localizer south course to HULLO/I-TXH 6.3 DME and hold.

ATIS★	HOUSTON APP CON	SUGAR LAND TOWER★	GND CON	CLNC DEL	CLNC DEL (when twr closed)	UNICOM
118.125	123.8 257.7	118.65 (CTAF) L	121.4	121.4	119.25	122.95

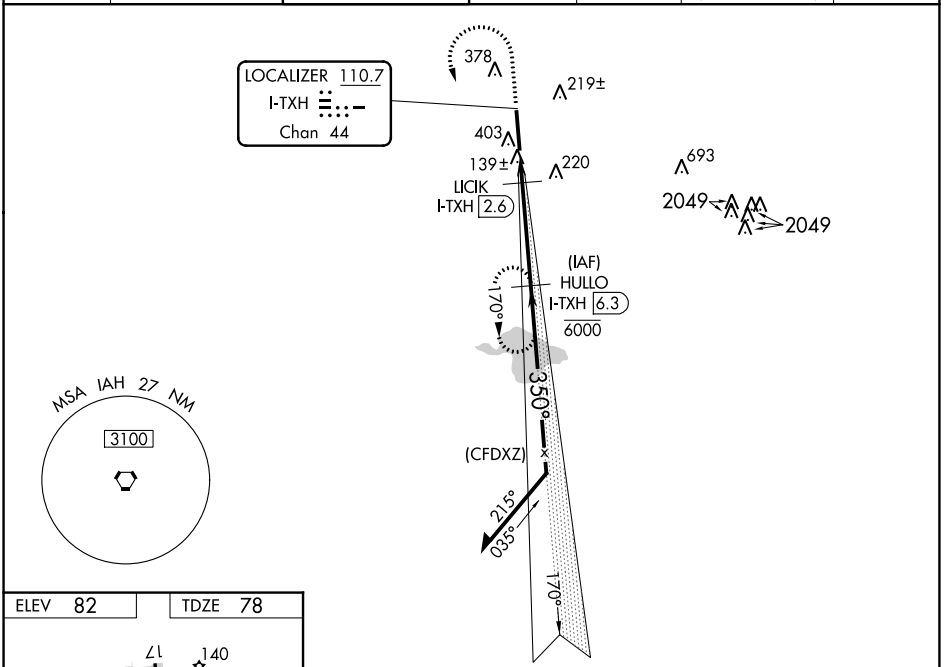

ELEV 82 | TDZE 78



REIL Rwys 17 and 35 L
HIRL Rwy 17-35 L

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44

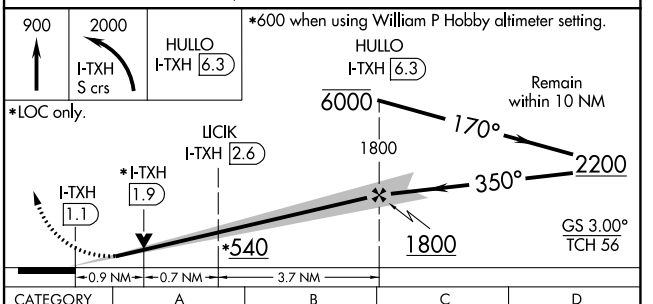

CATEGORY	A	B	C	D
S-ILS 35	278-¾ 200 (200-¾)			
S-LOC 35	400-1 322 (400-1)			
C CIRCLING	720-1 638 (700-1)		720-1¾ 638 (700-1¾)	720-2 638 (700-2)

SC-5, 22 FEB 2024 to 21 MAR 2024
SC-5, 22 FEB 2024 to 21 MAR 2024

RNAV (GPS) RWY 17

SUGAR LAND RGNL (SGR)

WAAS	APP CRS	Rwy Idg	7620
CH 82513	170°	TDZE	82
W17A		Apt Elev	82

RNP APCH.

Rwy 17 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct POPAM and hold.

ATIS★	HOUSTON APP CON	SUGAR LAND TOWER★	GND CON	CLNC DEL	CLNC DEL	UNICOM
118.125	123.8 257.7	118.65 (CTAF) L	121.4	121.4	119.25 (when twr closed)	122.95

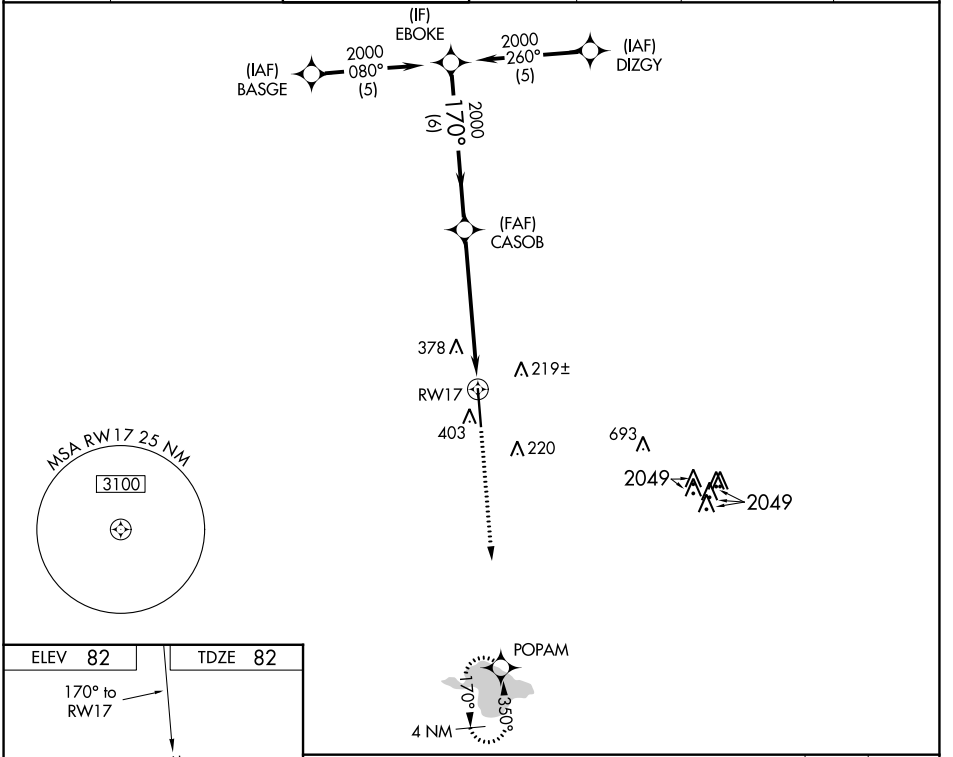

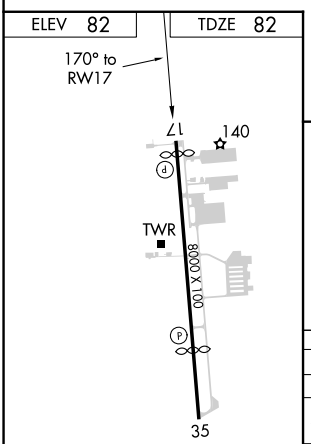

REIL Rwys 17 and 35 L
HIRL Rwy 17-35 L

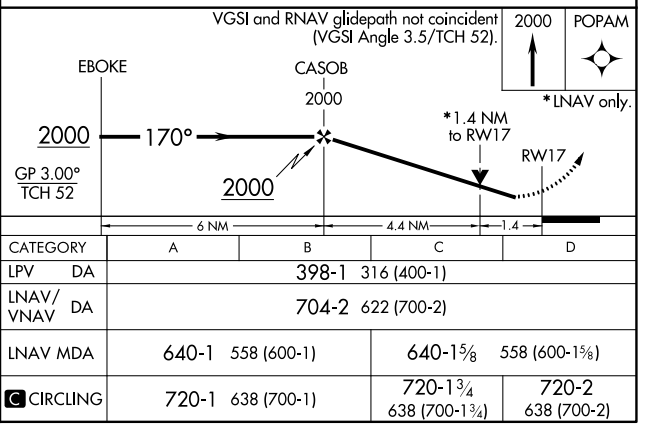

CATEGORY	A	B	C	D
LPV DA	398-1 316 (400-1)			
LNAV/VNAV DA	704-2 622 (700-2)			
LNAV MDA	640-1 558 (600-1)		640-1⅝ 558 (600-1⅝)	
C CIRCLING	720-1 638 (700-1)		720-1¾ 638 (700-1¾)	720-2 638 (700-2)

SC-5, 22 FEB 2024 to 21 MAR 2024
SC-5, 22 FEB 2024 to 21 MAR 2024

WAAS CH 56219 W35A	APP CRS 350°	Rwy Idg 6016	TDZE 78	Apt Elev 82

RNAV (GPS) RWY 35

SUGAR LAND RGNL (SGR)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV and VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting: increase all DA 51 feet; increase all MDA 60 feet and increase LNAV-VNAV all Cats visibility to 1¾, LNAV Cat C/D visibility to 1⅞, and Circling Cat C visibility to 2, Cat D to 2¼. When VGSI inop, Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 2000 direct UPAQI and on track 019° to DREWZ and hold.

ATIS★	HOUSTON APP CON	SUGAR LAND TOWER★	GND CON	CLNC DEL	CLNC DEL (when twr closed)	UNICOM
118.125	123.8 257.7	118.65 (CTAF) L	121.4	121.4	119.25	122.95

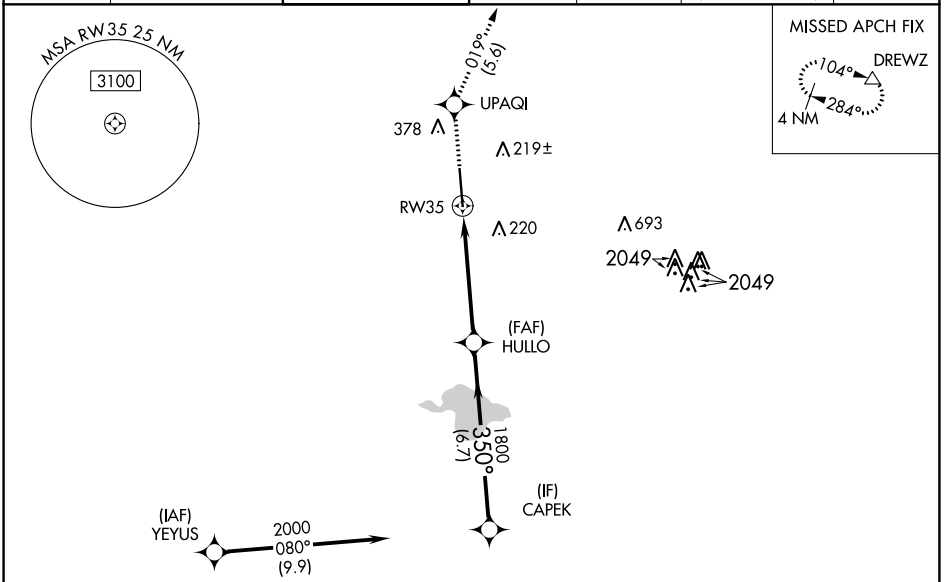

RADAR REQUIRED

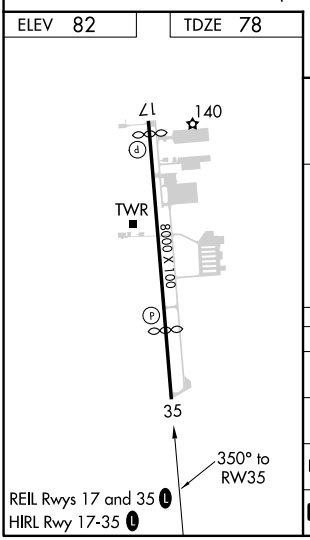

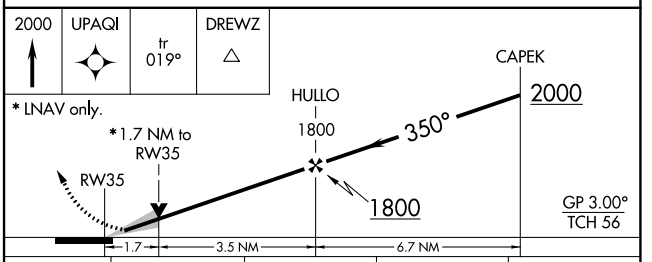

CATEGORY	A	B	C	D
LPV DA	278-¾ 200 (200-¾)			
LNAV/VNAV DA	567-1⅝ 489 (500-1⅝)			
LNAV MDA	660-1 582 (600-1)		660-1¾ 582 (600-1¾)	
C CIRCLING	720-1 638 (700-1)		720-1¾ 638 (700-1¾)	720-2 638 (700-2)

SC-5, 22 FEB 2024 to 21 MAR 2024
SC-5, 22 FEB 2024 to 21 MAR 2024