

WAAS CH 50407 W18A	APP CRS 180°	Rwy Idg TDZE Apt Elev 801	5504 800 801
--	------------------------	--	---

RNAV (GPS) RWY 18


BOMAR FLD/SHELBYVILLE MUNI (SYI)

⚠

When local altimeter setting not received, use Tullahoma altimeter setting and increase LPV DA to 1123, LNAV/VNAV DA to 1389, all MDA 80 feet, increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¼ SM and LNAV Cat C and D visibility ¼ SM. Baro-VNAV NA when using Tullahoma altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116° F). DME/DME RNP-0.3 NA. VDP NA when using Tullahoma altimeter setting.

MISSED APPROACH:
Climb to 3000 direct UCELI and hold.

AWOS-3 119.275	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

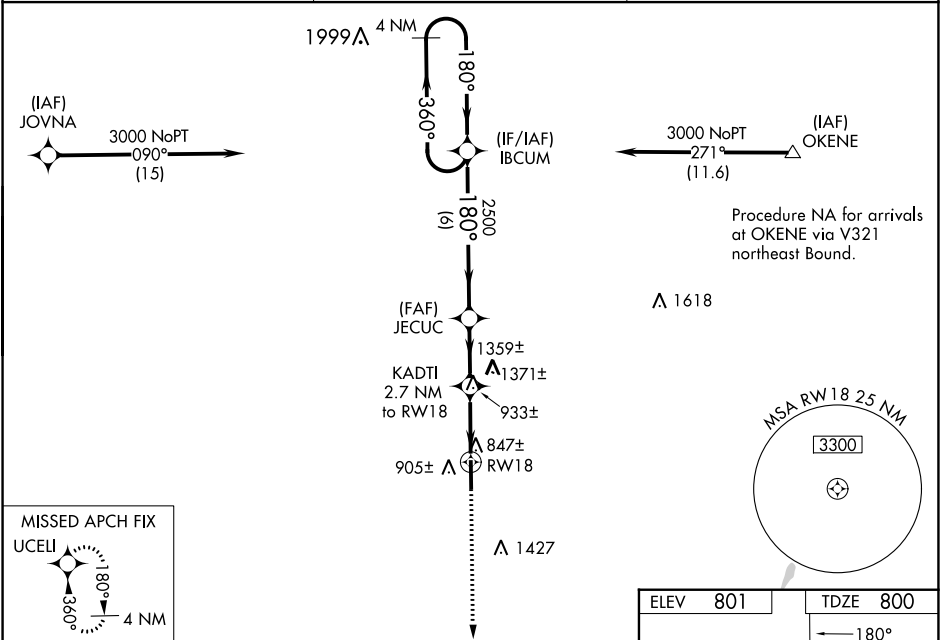

4 NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 26).		3000	UCELI
3000		180°		180°	*UNAV only.
GP 3.00° TCH 45		2500		1700	
6 NM		2.4 NM		1.2 NM	1.5 NM
CATEGORY	A	B	C	D	
LPV DA	1050-¾		250 (300-¾)		
LNAV/VNAV DA	1316-1¾		516 (600-1¾)		
LNAV MDA	1280-1	480 (500-1)	1280-1¼	1280-1½	480 (500-1½)
CIRCLING	1280-1	1420-1	1780-3	979 (1000-3)	
	479 (500-1)	619 (700-1)			


APP CRS	Rwy Idg	5504
015°	TDZE	801
	Apt Elev	801

RNAV (GPS) Y RWY 36



BOMAR FLD/SHELBYVILLE MUNI (SYI)

▼ ▲ When local altimeter setting not received, use Tullahoma altimeter setting and increase all MDA 80 feet, and increase LNAV Cat C/D visibility ¼ SM. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 3000 direct KUGCE and via 358° track to IBCUM and hold.
--	---

AWOS-3 119.275	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF) 0
-------------------	----------------------------------	--------------------------

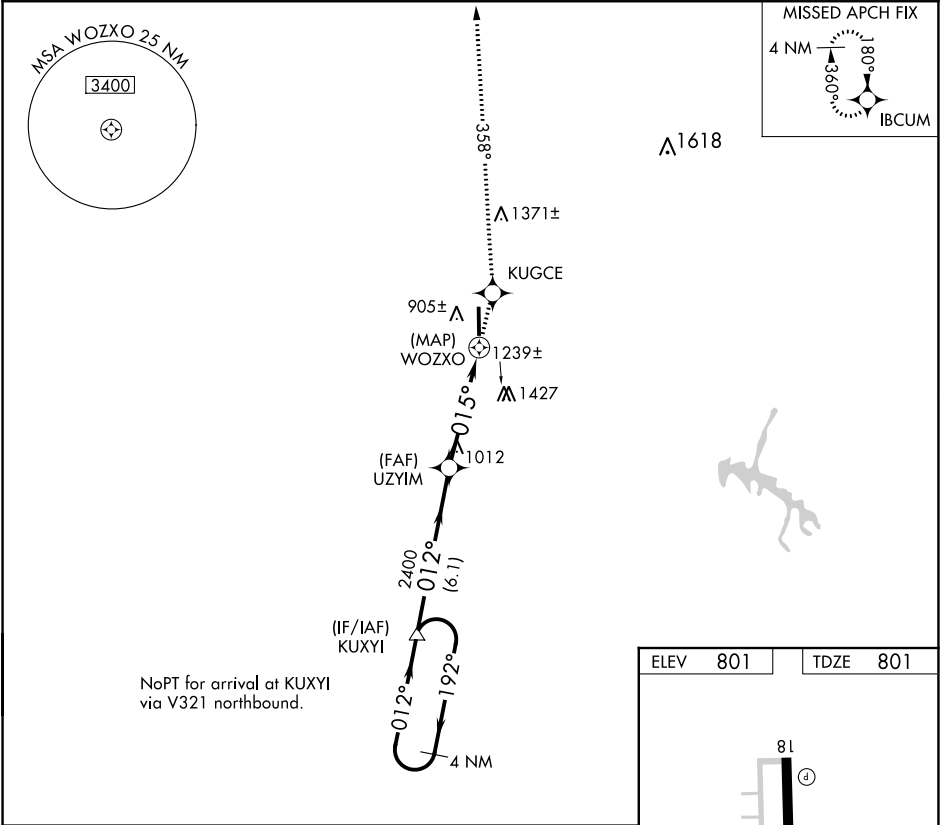

NoPT for arrival at KUXYI via V321 northbound.

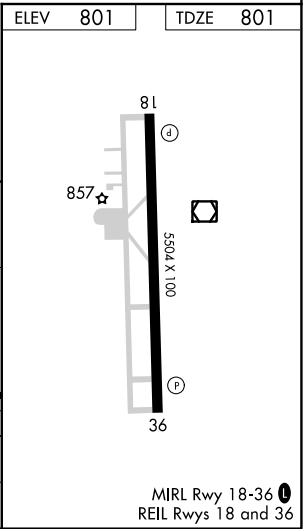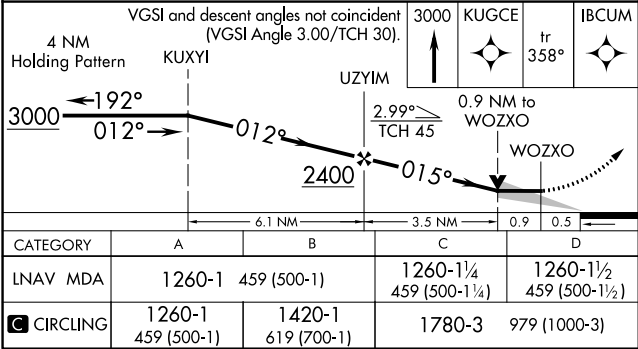

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024

WAAS CH 97607 W36A	APP CRS 360°	Rwy Idg TDZE 801 Apt Elev 801
--	------------------------	---



RNAV (GPS) Z RWY 36

BOMAR FLD/SHELBYVILLE MUNI (SYI)

⚠ When local altimeter setting not received, use Tullahoma altimeter setting and increase LPV DA to 1124, all MDA 80 feet, increase LPV all Cts visibility ½ SM and LNAV Cat C and D visibility ¼ SM. DME/DME RNP-0.3 NA. VDP NA when using Tullahoma altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
IBCURM and hold.

AWOS-3 119.275	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

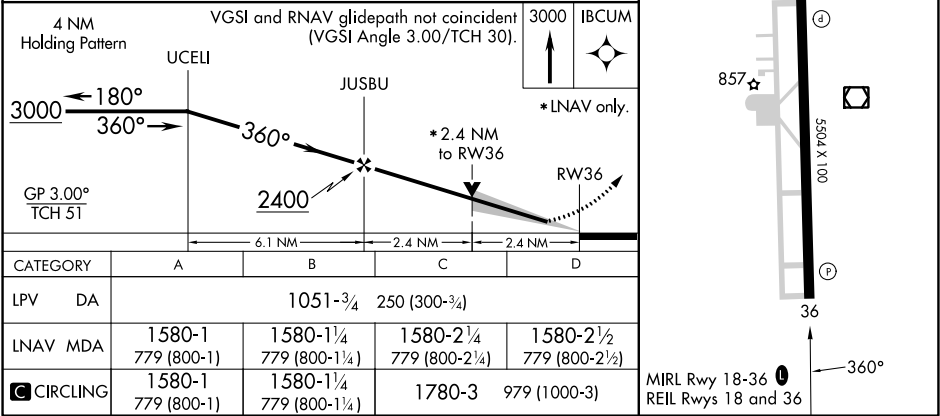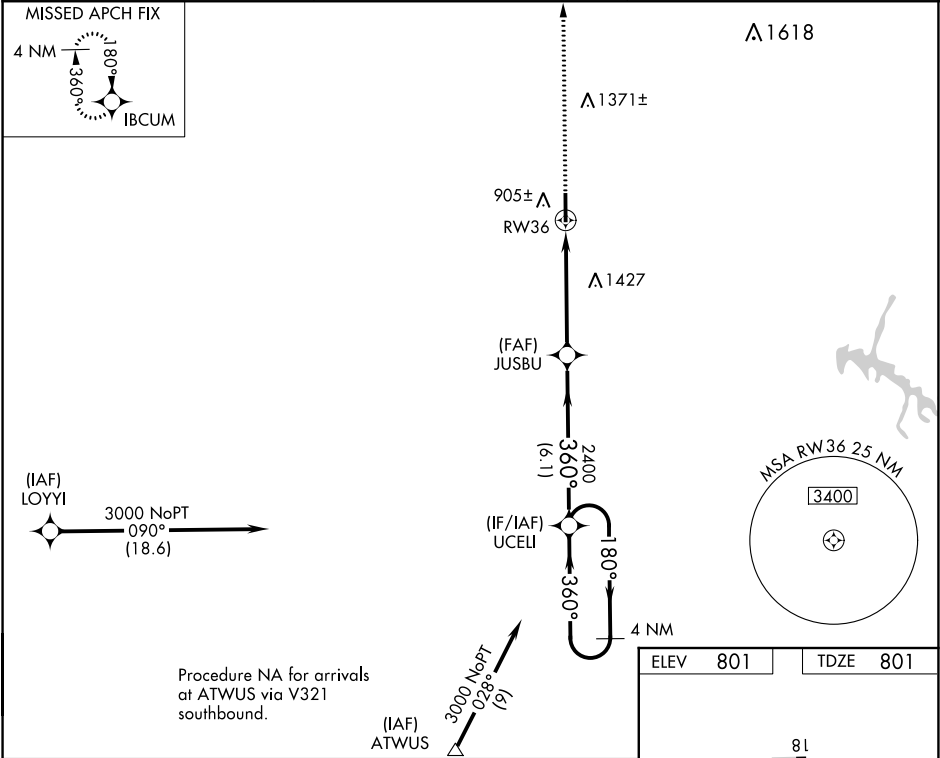


VOR/DME SYI	APP CRS	Rwy Idg
113.55	152°	5504
Chan 82 (Y)		TDZE 800
		Apt Elev 801

VOR RWY 18
BOMAR FLD/SHELBYVILLE MUNI (SYI)

⚠ When local altimeter setting not received, use Tullahoma altimeter setting and increase all MDAs 80 feet and S-18 visibility Cat B/C/D ½ SM, and Circling visibility Cat B ¼ SM.

MISSED APPROACH: Climbing right turn to 3000 in SYI VOR/DME holding pattern.

AWOS-3 119.275	MEMPHIS CENTER 128.15 323.125	UNICOM 122.8 (CTAF) 0
-------------------	----------------------------------	---------------------------------

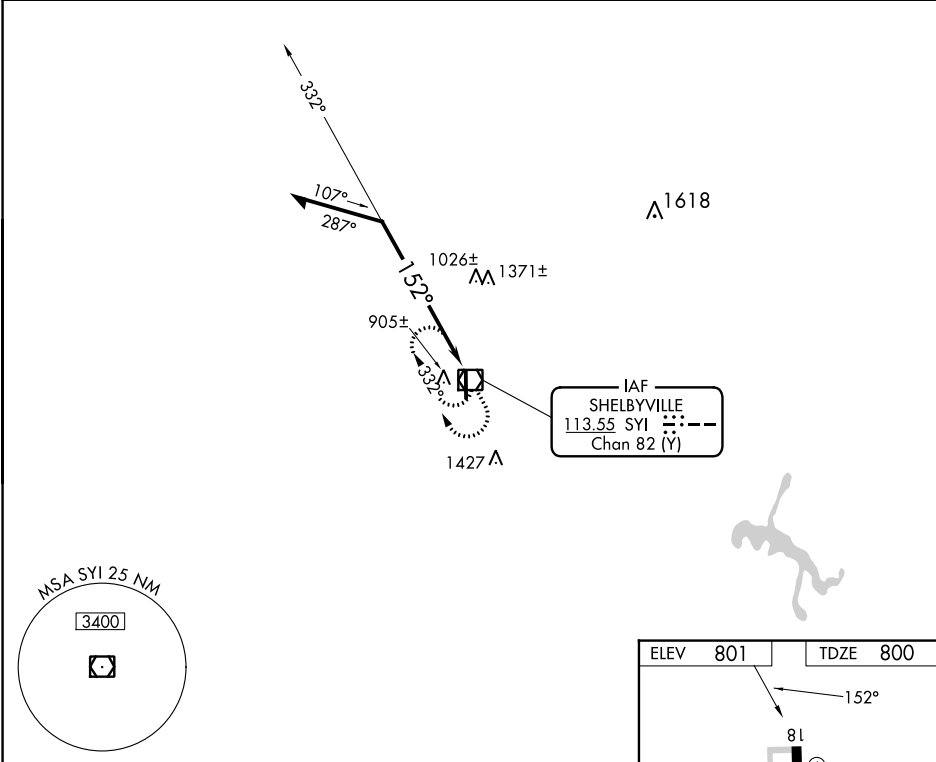

Remain within 10 NM

SYI VOR/DME

3000


332°

152°

3000

SYI

CATEGORY	A	B	C	D
S-18	1500-1	700 (700-1)	1500-2	700 (700-2)
C CIRCLING	1500-1	699 (700-1)	1780-3	979 (1000-3)

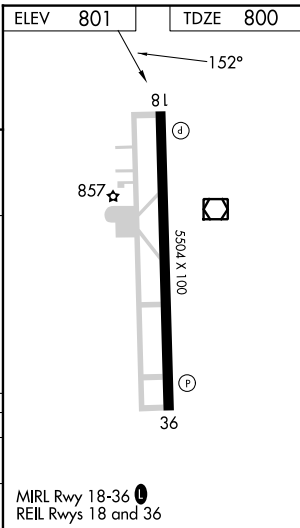

SE-1, 22 FEB 2024 to 21 MAR 2024

SE-1, 22 FEB 2024 to 21 MAR 2024

VOR/DME SYI
113.55
Chan **82** (Y)

APP CRS
016°

Rwy Idg **5504**
TDZE **801**
Apt Elev **801**

VOR RWY 36

BOMAR FLD/SHELBYVILLE MUNI (SYI)

DME required.

When local altimeter setting not received, use Tullahoma altimeter setting and increase all MDAs 80 feet, and S-36 Cat C/D visibility ¼ SM.
VDP NA when using Tullahoma altimeter setting.

MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct SYI VOR/DME and hold.

AWOS-3
119.275

MEMPHIS CENTER
128.15 323.125

UNICOM
122.8 (CTAF) **0**

