

LOC I-UCY
109.7

APP CRS
006°

Rwy ldg 6503
TDZE 346
Apt Elev 346


ILS or LOC RWY 1
EVERETT-STEWART RGNL (UCY)

ADF required. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase S-LOC 1 Cat C/D visibility to 1 3/4 mile, Circling Cat C visibility to 1 3/4 mile and Circling Cat D visibility to 2 1/2 mile. Inop table does not apply to S-ILS 1. For inop ODALS, increase S-LOC 1 Cat C/D visibility to 1 3/4 mile. For inop ODALS when using Dyersburg altimeter setting, increase S-ILS 1 all Cats visibility to 3/4 mile and S-LOC 1 Cat D visibility to 1 3/4 mile.


ODALS

MISSED APPROACH:
Climb to 1300 then climbing right turn to 2500 direct OBION LOM and hold.


AWOS-3 135.325	MEMPHIS CENTER 133.65 292.15	UNICOM 122.7 (CTAF) 0
-------------------	---------------------------------	--------------------------

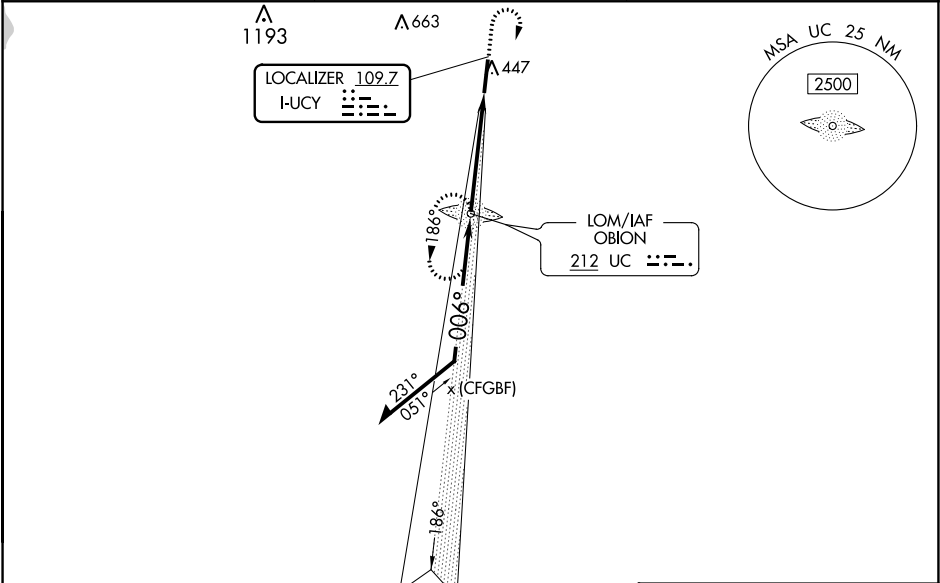

ADF and RADAR
REQUIRED

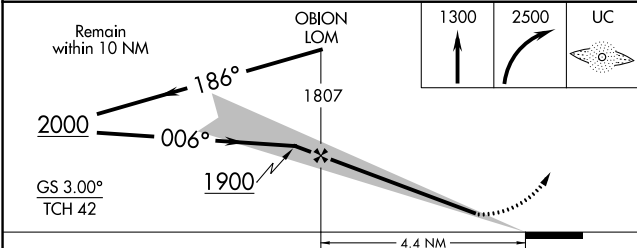

CATEGORY	A	B	C	D
S-ILS 1	546-3/4 200 (200-3/4)			
S-LOC 1	820-3/4 474 (500-3/4)	820-1 1/4 474 (500-1 1/4)		
CIRCLING	820-1 474 (500-1)	820-1 1/2 474 (500-1 1/2)	1020-2 1/4 674 (700-2 1/4)	

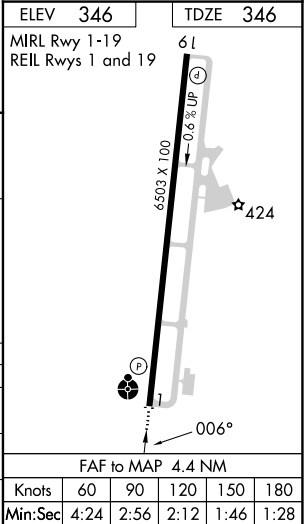

WAAS CH 53328 W01A	APP CRS 006°	Rwy Idg 6503 TDZE 346 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 1

EVERETT-STEWART RGNL (UCY)

▼



▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase LNAV/VNAV all Cats visibility to 1½ SM, LNAV Cat C/D visibility to 1½ SM, and Circling Cat D visibility to 2½ SM. For inoperative ALS, increase LNAV/VNAV and LNAV all Cats visibility to 1 SM. For inoperative ALS when using Dyersburg altimeter setting, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1¼ SM, and LNAV Cat D visibility to 1¾ SM. Inoperative table does not apply to LPV all Cats and LNAV Cats C/D.

ODALS

MISSED APPROACH:
Climb to 2900 direct
LOYIG and hold.

AWOS-3 135.325	MEMPHIS CENTER 133.65 292.15	UNICOM 122.7 (CTAF) 0
--------------------------	--	---------------------------------

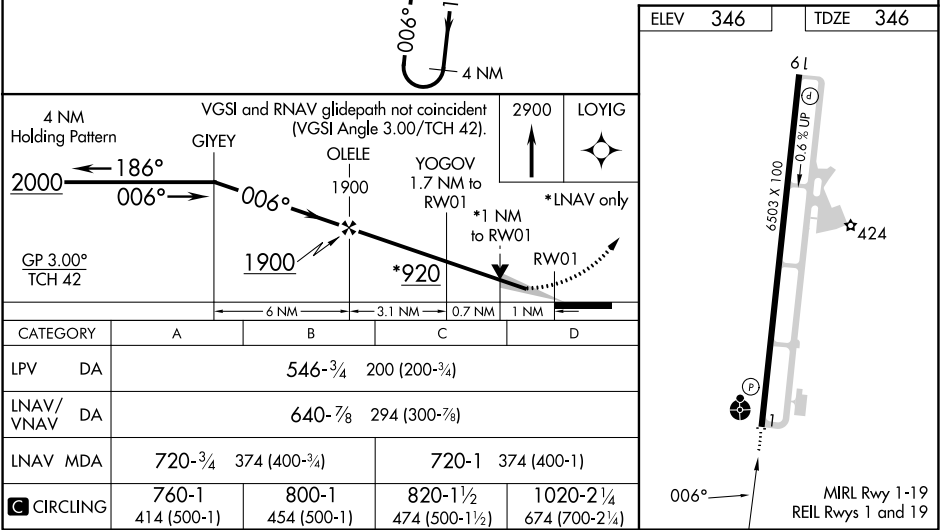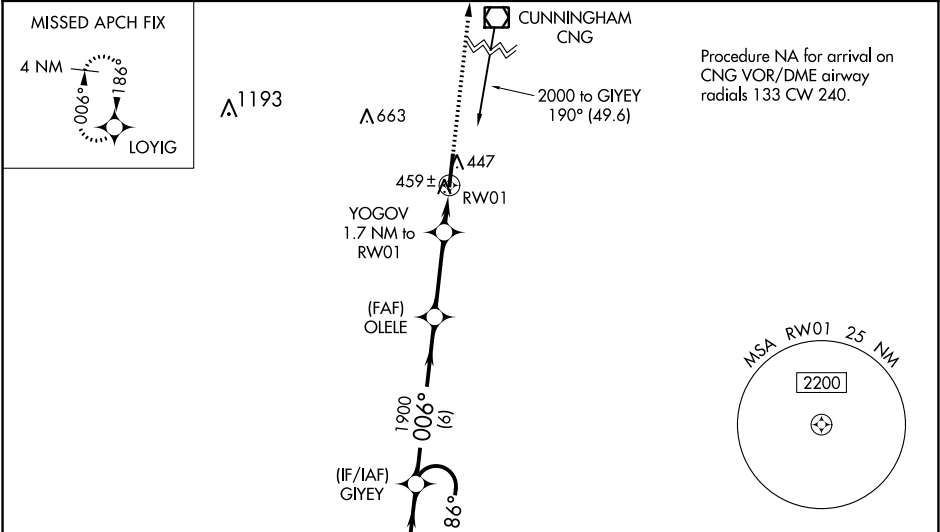

WAAS CH 48922 W19A	APP CRS 186°	Rwy Idg 6503 TDZE 320 Apt Elev 346
--	------------------------	---

RNAV (GPS) RWY 19



EVERETT-STEWART RGNL (UCY)

NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA with Dyersburg altimeter setting. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C/D visibility ¾ SM, and Circling Cat D visibility ¼ SM.

MISSED APPROACH:
Climb to 2300 direct GIYEV and hold.

AWOS-3 135.325	MEMPHIS CENTER 133.65 292.15	UNICOM 122.7 (CTAF) 1
--------------------------	--	---------------------------------

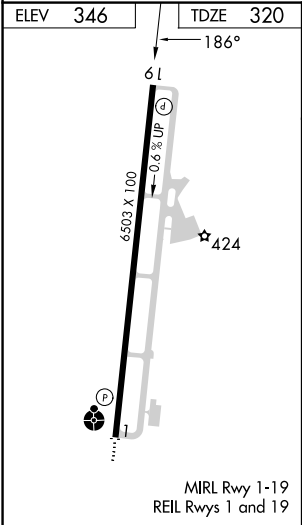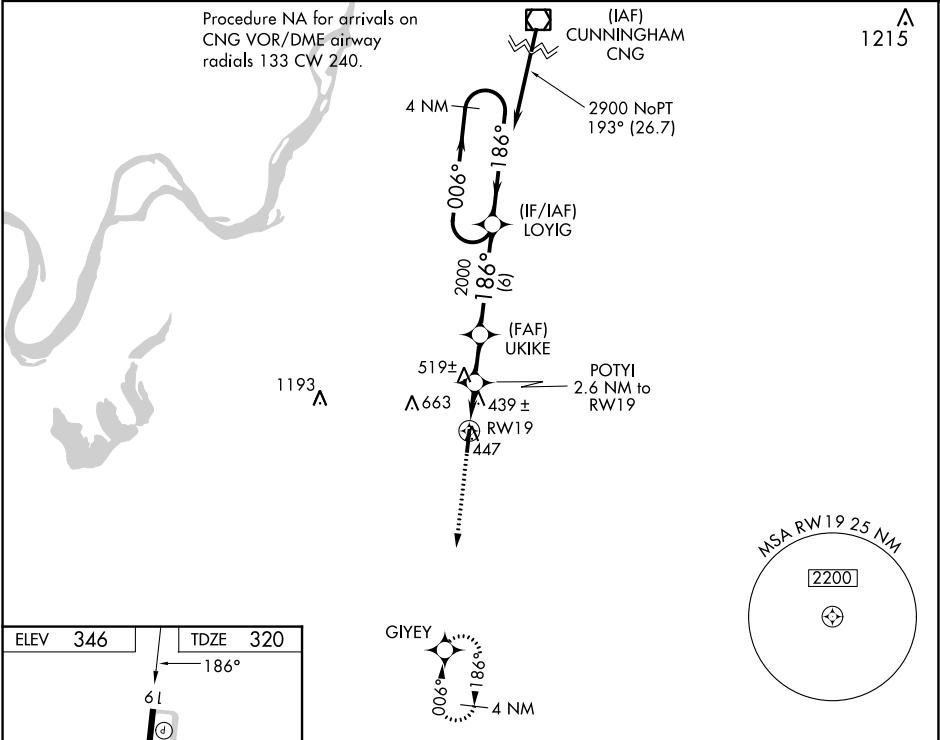

2300	GIYEV	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 29).		4 NM Holding Pattern	
		POTYI 2.6 NM to RW19	UKIKE 2000	LOYIG	006° → 2900
*LNAV only.				← 186°	
		*1.1 NM to RW19	1160*	186°	GP 3.00° TCH 40
		1.1	1.5	2.6 NM	6 NM
CATEGORY	A		B	C	D
LPV DA			570-7/8	250 (300-7/8)	
LNAV/ VNAV DA			719-13/8	399 (400-13/8)	
LNAV MDA			700-1	380 (400-1)	
 CIRCLING	760-1	800-1	820-1 1/2	1020-2 1/4	
	414 (500-1)	454 (500-1)	474 (500-1 1/2)	674 (700-2 1/4)	