


WAAS CH 86317 W18A	APP CRS 175°	Rwy Idg TDZE 1435 Apt Elev 1435
--	------------------------	---

RNAV (GPS) RWY 18

QUENTIN AANENSON FLD (LYV)

RNP APCH-GPS.	MISSED APPROACH: Climb to 3200 direct HEXAM and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.	

AWOS-3 119.825	SIOUX FALLS APP CON ★ 125.8 284.725	UNICOM 122.7 (CTAF) ①
--------------------------	---	---------------------------------

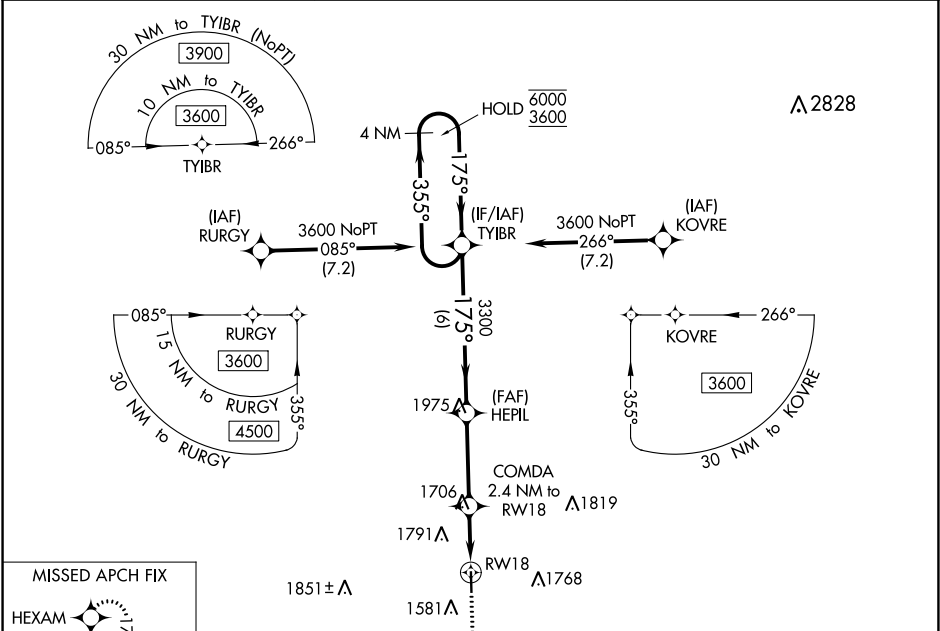

ELEV 1435		TDZE 1435	
4 NM Holding Pattern		HEXAM	
6000 3600 355° 175°		3200	
GP 3.00° TCH 50		HEXAM	
TYIBR		HEPIL	
4 NM Holding Pattern		COMDA 2.4 NM to RW18	
6 NM 3.3 NM 0.8 NM 1.6 NM		RW18	
CATEGORY		A	
LPV DA		1635-1 200 (200-1)	
LNAV/VNAV DA		1847-1 1/8 412 (500-1 1/8)	
LNAV MDA		1960-1 525 (600-1) 1960-1 1/2 525 (600-1 1/2)	
CIRCLING		1960-1 525 (600-1) 2160-1 725 (800-1) 2360-2 3/4 925 (1000-2 3/4) 2360-3 925 (1000-3)	
MIRL Rwy 18-36 ①		REIL Rwy 18 and 36 ①	