


WAAS CH 66029 W34A	APP CRS 346°	Rwy Idg TDZE Apt Elev	9501 2858 2872
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 34L
MIDLAND INTL AIR AND SPACE PORT (M.A.F.)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 26°C (78°F). Circling Rwy 16L NA at night. DME/DME RNP-0.3 NA.	MISSED APPROACH: Climb to 5100 direct PERAE and hold.
--	---

ATIS 126.8 235.975	MIDLAND APP CON★ 124.6 290.4	MIDLAND TOWER★ 118.7 (CTAF) 0 273.45	GND CON 121.9 348.6	CLNC DEL 118.05 317.65	UNICOM 122.95
------------------------------	--	--	-------------------------------	----------------------------------	-------------------------

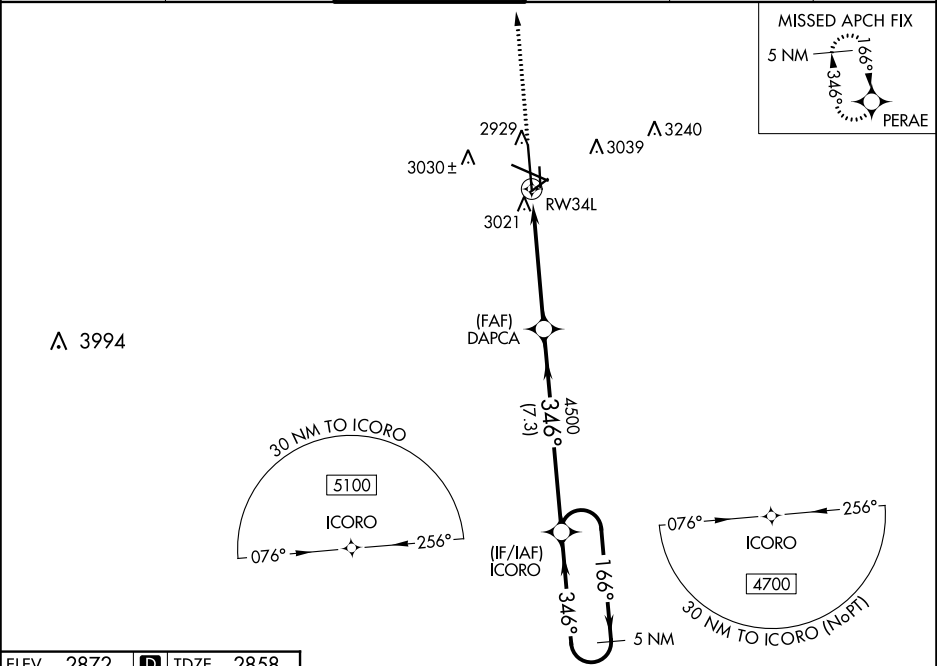

ELEV 2872	D	TDZE 2858
-----------	---	-----------

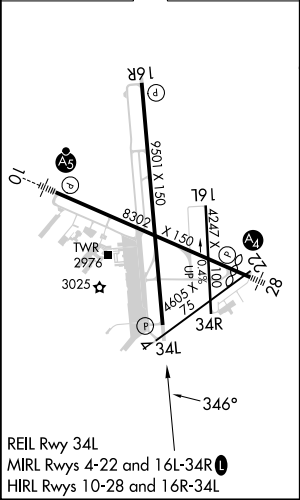

5100	PERAE	* LNAV only	ICORO	5 NM Holding Pattern
			DAPCA	4500
			RW34L	1.2
				3.8 NM
				7.3 NM
CATEGORY	A	B	C	D
LPV DA	3058- $\frac{3}{4}$	200 (200- $\frac{3}{4}$)		
LNAV/VNAV DA	3203- $1\frac{1}{8}$	345 (400- $1\frac{1}{8}$)		
LNAV MDA	3280-1	422 (500-1)	3280- $1\frac{1}{4}$	422 (500- $1\frac{1}{4}$)
CIRCLING	3440-1	568 (600-1)	3440- $1\frac{1}{2}$	3520-2
			568 (600- $1\frac{1}{2}$)	648 (700-2)