


LOC I-MCW 109.5	APP CRS 360°	Rwy Idg TDZE Apt Elev	6401 1193 1213
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36
MASON CITY MUNI (MCW)

DME required. For inoperative ALS, increase S-LOC 36 Cats C and D visibility to 1 3/4 SM. DME from MCW VOR/DME. DME use requires simultaneous reception of I-MCW and MCW DME.	MALSR AS	MISSED APPROACH: Climb to 2900 then climbing left turn to 3200 on heading 170° and MCW R-332 to MCW VOR/DME and on MCW R-173 to PICDI/MCW VOR/DME 9 DME and hold.
--	-------------	---

ASOS 120.3	MINNEAPOLIS CENTER 127.3 257.675	UNICOM 123.0 (CTAF) 0
----------------------	--	---------------------------------

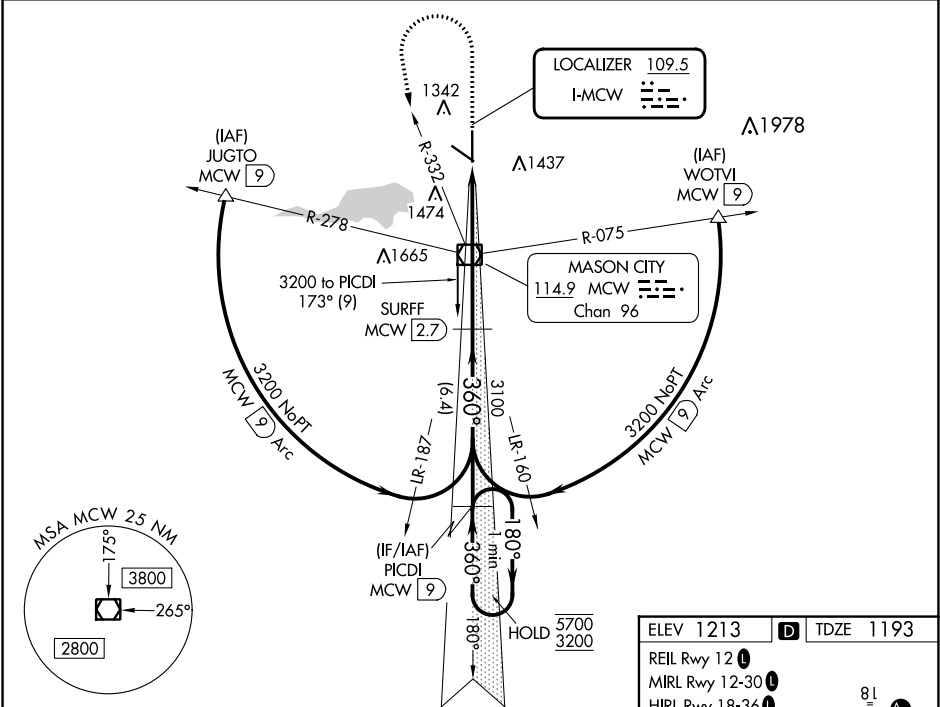

2900	3200	MCW	MCW	PICDI	VGSI and ILS glidepath not coincident (VGSI Angle 2.90/TCH 62).
hdg 170°	MCW R-332	MCW R-173	MCW 9	One Minute Holding Pattern	
MCW 3.4	MCW 1.6	SURFF MCW 2.7	3100	360°	180°
1.8 NM	4.3 NM	6.4 NM	C	D	
CATEGORY	A	B	C	D	
S-ILS 36	1393-1/2	200 (200-1/2)			
S-LOC 36	1800-1/2	607 (600-1/2)	1800-1 3/8	607 (600-1 3/8)	
CIRCLING	1800-1	587 (600-1)	1800-1 3/4	587 (600-1 3/4)	

