

RNAV (RNP) Y RWY 13C
CHICAGO MIDWAY INTL (MDW)

T For uncompensated Baro-VNAV systems, procedure NA below -21°C or above 54°C.

MISSED APPROACH: Climb to 1100 then climbing right turn to 2600 direct EON VORTAC and hold.

D-ATIS
132.75



CHICAGO APP CON
128.2 353.875

MIDWAY TOWER
135.2 269.125

GND CON
118.075

CLNC DEL
124.625

CPDLC

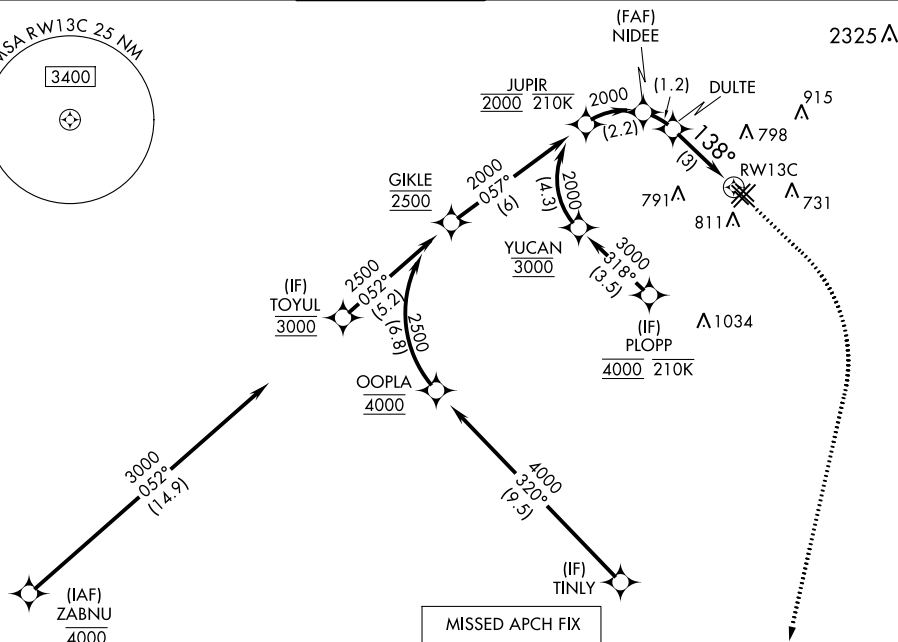

MISSED APCH FIX


4 NM

180°

001°


PEOTONE
EON

ELEV 620	D	TDZE 611
----------	----------	----------

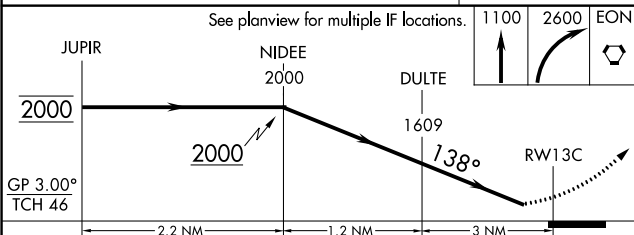

CATEGORY	A	B	C	D
RNP 0.10 DA		885/45	274 (300-7%)	
RNP 0.20 DA		1005/60	394 (400-1¼%)	
RNP 0.30 DA		1051-1¼	440 (500-1¼%)	

AUTHORIZATION REQUIRED



HIRL Rwy 4R-22L and 13C-31C
MIRL Rwy 4L-22R, 13L-31R, and
13R-31L
REIL Rwy 4R, 22L, and 31C
RLLS Rwy 13C and 31C