


VOR/DME MFE 117.2 Chan 119	APP CRS 305°	Rwy Idg 7120 TDZE 102 Apt Elev 107
--	------------------------	---

VOR RWY 32
MC ALLEN INTL (MFE)


T Circling NA northeast of Rwy 14-32. When local altimeter setting not received, use Weslaco altimeter setting and increase all MDA 40 feet and S-32 Cat C/D and Circling Cat C visibility $\frac{1}{8}$ mile, increase DIVAN Fix Minimums S-32 Cat C/D visibility $\frac{1}{8}$ mile. VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 900 then climbing right turn to 2100 direct MFE VOR/DME.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER★ 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	--	-------------------------	-------------------------

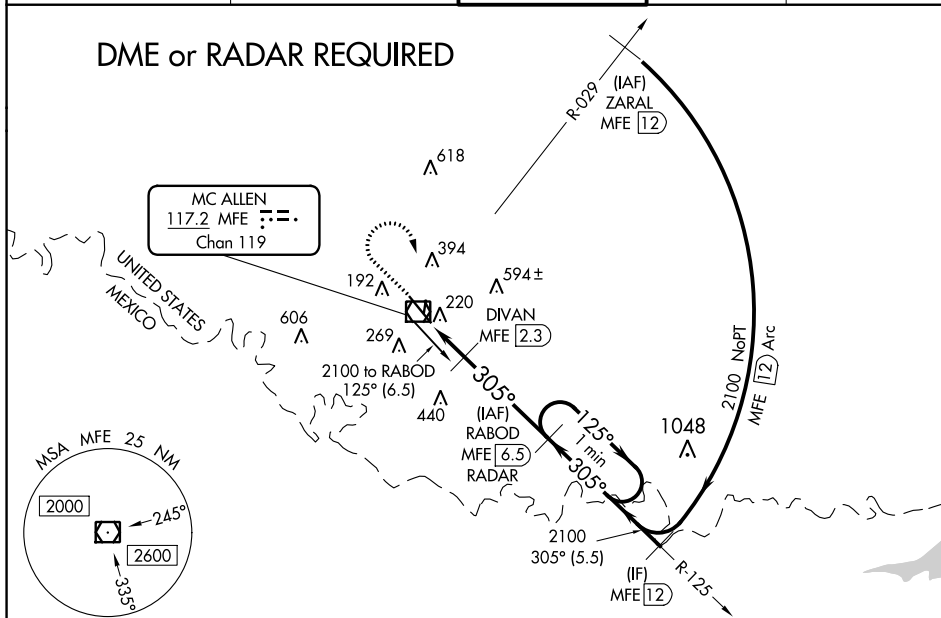

ELEV 107	D	TDZE 102
----------	----------	----------

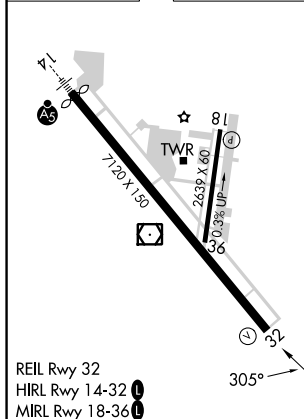

FAF to MAP 5.9 NM					
Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58

900 2100 MFE

MFE VOR/DME

MFE 0.6

MFE 1.6

DIVAN MFE 2.3

RABOD MFE 6.5 RADAR

One Minute Holding Pattern

125° 2100

305°

3.09° TCH 52

*700 when using Weslaco altimeter setting.

1 NM 0.7 NM 4.2 NM

CATEGORY	A	B	C	D
S-32	660-1	558 (600-1)	660-1½	558 (600-1½)
CIRCLING	660-1	553 (600-1)	660-1½ 553 (600-1½)	800-2¼ 693 (700-2¼)

DIVAN FIX MINIMUMS

S-32	480-1 378 (400-1)
CIRCLING	580-1 473 (500-1)